

# FISHEYE NETWORK CAMERA



Introducing the groundbreaking FE360IP12MP security camera, revolutionizing surveillance. Boasting an exceptional 12MP resolution and a 2.0mm lens providing a 180° horizontal field of view (wall mount) and an astonishing 360° (ceiling mount), this camera ensures unmatched coverage, capturing every angle with breathtaking clarity. Complete with audio input/outputs, an alarm, and a built-in microphone, it offers comprehensive audio surveillance and communication capabilities. Effortlessly connect via P2P for straightforward setup and receive instant notifications, staying informed of any detected activity in real-time. Elevate your security with the FE360IP12MP, setting new standards in advanced surveillance technology.



## FE360IP12MP



12MP RESOLUTION



2.0MM LENS



IR UP TO 10M



WALL MOUNT 180°  
CEILING MOUNT 360°



TWO-WAY  
COMMUNICATION



DEWARPING UP TO  
NINE DIVISIONS



MICRO SD CARD SLOT UP TO 256 GB



DUSTPROOF & WATER-RESISTANT



| VIDEO             |  |
|-------------------|--|
| RESOLUTION        | 4000(H)×3000(V)                                  |
| IMAGE SENSOR      | 1/2.3" Progressive CMOS                          |
| MIN. ILLUMINATION | Color 0.03lux @ F2.0(AGC ON) ; B/W 0 lux @ IR ON |
| SHUTTER           | 1/5 ~ 1/20000s                                   |




| LENS TYPE |  |
|-----------|--|
| LENS      | 2.0mm, horizontal FOV 180° (wall mount), 360°(ceiling mount) |
| F NO.     | F 2.0 ±5%  |

| OPERATIONAL       |        |  |                             |
|-------------------|--------|--|-----------------------------|
| DAY & NIGHT       |        | IR cut filter with auto switch (Day/Night/Auto/Image/Schedule) |                             |
| WDR               |        | DWDR   |                             |
| VIDEO COMPRESSION |        | H.265/H.264/H.265+/H2.64+/MJPEG                                |                             |
| VIDEO BIT RATE    |        | 256Kbps ~ 16Mbps   |                             |
| TRIPLE STREAM     |        | Yes  |                             |
| RESOLUTION        | @15fps | Mainstream   | 4000x3000                   |
|                   |        | Substream  | 1280x960, 640x480           |
|                   |        | Mobilestream   | 640x480                     |
|                   | @25fps | Mainstream   | 3000x3000                   |
|                   |        | Substream  | 1080x1080, 720x720, 480x480 |
|                   |        | Mobilestream   | 480x480                     |
|                   | @25fps | Mainstream   | 2560x2560                   |
|                   |        | Substream  | 1080x1080, 720x720, 480x480 |
|                   |        | Mobilestream   | 480x480                     |
|                   | @25fps | Mainstream   | 2160x2160                   |
|                   |        | Substream  | 1080x1080, 720x720, 480x480 |
|                   |        | Mobilestream   | 480x480                     |
|                   | @25fps | Mainstream   | 1520x1520                   |
|                   |        | Substream  | 1080x1080, 720x720, 480x480 |
|                   |        | Mobilestream   | 480x480                     |
|                   | @25fps | Mainstream   | 1080x1080                   |
|                   |        | Substream  | 1080x1080, 720x720, 480x480 |
|                   |        | Mobilestream   | 480x480                     |
|                   | @25fps | Mainstream   | 720x720                     |
|                   |        | Substream  | 1080x1080, 720x720, 480x480 |
|                   |        | Mobilestream   | 480x480                     |
| AI FEATURES       |        | N/A  |                             |

| NETWORK              |  |
|----------------------|--|
| BLC                  | Support  |
| ROI                  | Support  |
| VIDEO ANALYTICS      | NA   |
| PROTOCOLS            | TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/TSP,PPPoE,SMTP,NTP,UPnP,SNMP,HTTPS,FTP |
| SYSTEM COMPATIBILITY | ONVIF( Profile S, G, T)  |
| INTERFACE            | RJ45 10M / 100M  |
| LED                  | 3pcs(SMD)  |
| IR RANGE             | Up to 10m  |
| SD STORAGE           | Micro SD slot, up to 256GB   |
| ALARM TRIGGER        | Yes  |
| MICROPHONE           | Yes  |
| SPEAKER              | Yes  |
| VIDEO OUTPUT         | NA   |
| RESET BUTTON         | Yes  |
| POE                  | Yes  |

| GENERAL              |                               |
|----------------------|-------------------------------|
| OPERATING CONDITIONS | -35~ +60°C/less than ≤ 95% RH |
| INGRESS PROTECTION   | IP66                          |
| POWER SUPPLY         | D12V/POE                      |
| POWER CONSUMPTION    | 3.8-9.6W                      |
| DIMENSIONS           | Ø120*55mm                     |
| WEIGHT               | appr 400g                     |

## DIMENSIONS

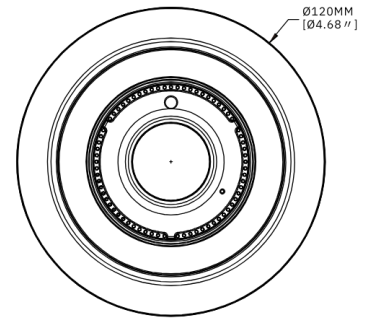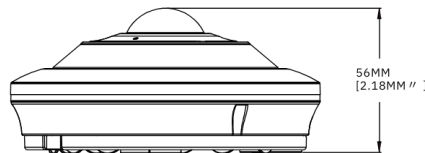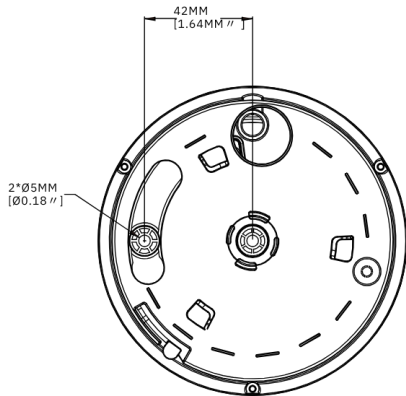

## ACCESSORIES

