


8 PORT MANAGED POE SWITCH



SWC9POE-MAN

Discover the SWC9POE-MAN, our Managed PoE Switch with 1 to 8 ports and extension up to 250 meters, ideal for flexible network deployments. Visual management via VMS and 10 cascade levels facilitate network expansion while ensuring optimal performance. P2P connection, device monitoring, and red port priority ensure maximum performance. With 1000M rates, ensure fast data transfer. Streamline your network management with our Managed PoE Switch.

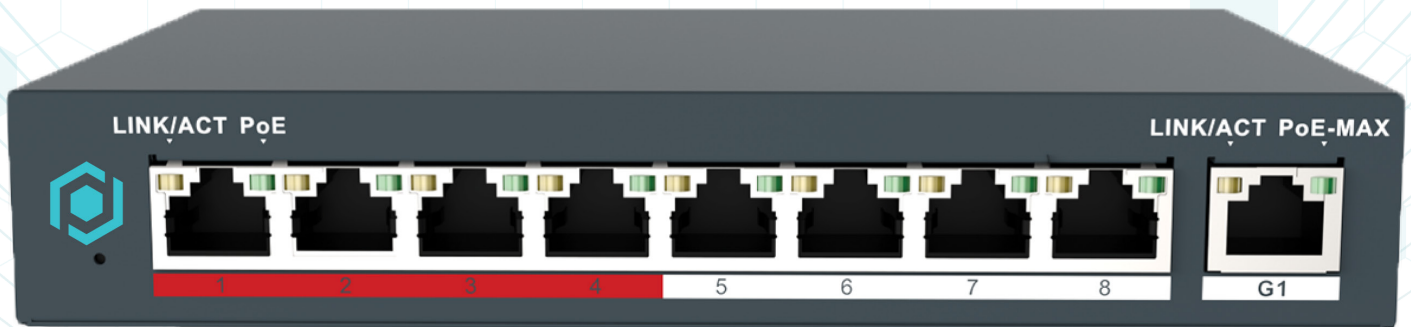

VISUAL MANAGEMENT THROUGH THE VMS



TOPOLOGICAL DIAGRAM ON VMS PRO



EXTENDED TRANSMISSION UP TO 250M



MAX 10 LEVELS OF CASCADES



P2P CONNECTION



DEVICE MONITORING



RED PORT PRIORITY



REAL TIME NOTIFICATIONS



MODEL		SWC9POE-MAN 4-PORTS 10/100M PoE EXTENDER	
INTERFACES	8x10/100M PoE+1x100/1000M Gigabit Ethernet	POE PORT	1~8
		EXTENSION MODE (EPOE)	250 Meters
NETWORK MANAGEMENT	Lite Manager (CMS connection, POE power consumer statistics, parameter configuration, log checking, firmware update, network topology)	MAX. POWER (INDIVIDUAL PORT)	30W
		MAX. POWER (ALL PORTS)	65W
IEEE Standard	802.3\802.3x\802.3ah\802.3az	CASE	Metal
UPLINK RATE (INDIVIDUAL PORT)	1000M	WEIGHT	380g
DOWNLINK RATE (INDIVIDUAL PORT)	1000M	DIMENSION (WXDXH)	173*100*30mm
EXCHANGE CAPACITY	3.6Gbps	OPERATING TEMPERATURE/HUMIDITY	Temperature : -10°C~+50°C; Humidity : Less than 90%RH
PACKET FORWARDING RATE	2.6Mpps	STORAGE TEMPERATURE/HUMIDITY	Temperature : -40°C~+85°C; Humidity : Less than 90%RH
INTERNAL CACHE	4Mbits	POWER SUPPLY	48V/ 1.5A
POE STANDARD	IEEE 802.3at/af	LIGHTNING PROTECTION	4KV

DIMENSIONS

