

TURRET NETWORK CAMERA



Onvif®
GMST

NDA
Compliant

Discover our T2IP5MP28-L-N turret type security camera. It offers an impressive 5 MP resolution, providing remarkably sharp video images. With its powerful infrared capability, it can capture clear images even in total darkness, with a range of up to 20 meters. The 2.8mm lens provides a wide field of view, ensuring comprehensive coverage. Operating efficiently in low-light conditions, with a lux rating of 0.002, this camera also offers the convenience of audio input and output options for enhanced surveillance. Suitable for both indoor and outdoor security applications, it ensures reliable and high-quality monitoring



T2IP5MP28-L-N



5MP RESOLUTION



2.8MM LENS



IR UP TO 30M



TRUE WDR



AUDIO IN/OUT



WATERPROOF AND DUST-TIGHT



MICRO SD CARD SLOT UP TO 256 GB



VIDEO

IMAGING DEVICE	1/2.7"
EFFECTIVE PIXELS	5MP 2880(H) x1620(V)
SCANNING SYSTEM	Progressive CMOS
MIN. ILLUMINATION	Color 0.004lux @ F1.6(AGC ON) ; B/W 0 lux @ IR ON

LENS TYPE

FOCAL LENGTH (ZOOM RATIO)	2.8 mm
MAX. APERTURE RATIO	F No. 1.6
ANGULAR FIELD OF VIEW	Horizontal: 110°, Vertical: 58°, Diagonal: 133°
MIN. OBJECT DISTANCE	1.8m
LENS TYPE	Fixed(M12)

OPERATIONAL

IR VIEWABLE LENGTH	Up to 30m
CAMERA TITLE	Show/Hide
DAY & NIGHT	IR cut filter with auto switch (Day/Night/Auto/Image/Schedule)
BACKLIGHT COMPENSATION	Off/On (5 Zone)
WIDE DYNAMIC RANGE	WDR
DIGITAL NOISE REDUCTION	3D DNR
MOTION DETECTION	Off/On (8 Level)
PRIVACY MASKING	Off/On (4 Zone, Rectangle)
GAIN CONTROL	Auto
WHITE BALANCE	Auto/Manual
ELECTRONIC SHUTTER SPEED	1/5 ~ 1/20000s
ON-BOARD STORAGE	Micro SD slot, up to 256GB
ALARM	NA
AUDIO	1 input, 1 output
HARDWARE RESET	Yes
SMART FEATURES	Rare Sound Detection (SD), Perimeter Intrusion Detection (PID), Face Detection (FD), Stationary Object Detection (SOD), Crowd Density Detection (CD), Human&Vehicle Detection (PD&VD), Line Crossing Detection (LCD), Queue Length Detection (QD), Heat Map (HM), Cross Counting (CC), License Plate Detection (LPD)


NETWORK

ETHERNET	RJ45(10/100BASE-T)
VIDEO COMPRESSION FORMAT	H.265/H.264
RESOLUTION	Mainstream@30fps 5MP(2880x1620),4MP(2592x1520), 3MP(2304x1296), 1080P(1920x1080), 960P(1280x960), 720P(1280x720) Substream@30fps 720P(1280x720),VGA(640x480),QVGA(320x240) Mobilestream@30fps VGA(640x480), QVGA (320x240)
VIDEO QUALITY ADJUSTMENT	256Kbps ~ 8Mbps
BITRATE CONTROL METHOD	CBR/VBR
STREAMING CAPABILITY	Triple-Stream(Main/Sub/Mobile)
PROTOCOL	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP, SMTP,NTP,UPnP,SNMP,HTTPS,FTP
SECURITY	IP address filter;complicated password; Authenticated username and password
STREAMING METHOD	Unicast/Multicast
APPLICATION PROGRAMMING INTERFACE	ONVIF(Profile S/G/T)
COMPATIBLE WEB BROWSERS	IE8,9,10,11, Safari V.11/above, Firefox V.51/above Google chrome V.44/above

GENERAL

OPERATING CONDITIONS	-40°+60°C/less than ≤ 95% RH
INGRESS PROTECTION	IP67
INPUT VOLTAGE / CURRENT	D12V/POE(IEEE802.3af)
POWER CONSUMPTION (IR OFF)	2W-3W
POWER CONSUMPTION (IR ON)	4W-5.5W
COLOR / MATERIAL	White/Metal
DIMENSION (WXHXD)	Ø128.6 X98.6mm
WEIGHT	appr. 474g

DIMENSIONS

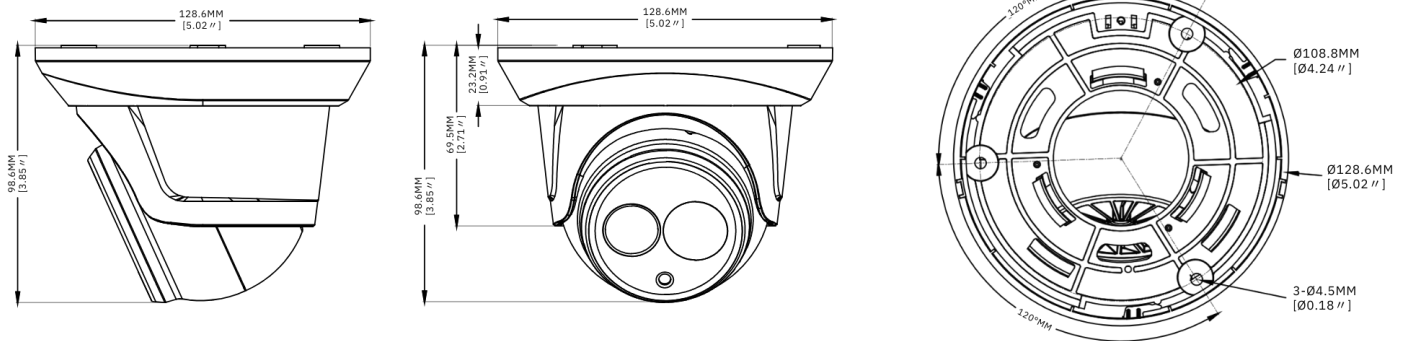

ACCESSORIES



EB3BASE4
JUNCTION BOX

OR



WMB5
WALLMOUNT BRACKET



EB3BASE4-G
PENDANT

+



WMB6
WALLMOUNT BRACKET


OR



CMB6
CEILING MOUNT BRACKET



PMB6
POLE MOUNT BRACKET



COMB6
CORNER MOUNT BRACKET



CMB6-EXT-150
EXTENDABLE CEILING MOUNT BRACKET



EXT-4POE
4 PORTS POE EXTENDER



IPCOAX-300M
IP OVER COAX EXTENDER