

MODEL #

FE360IP12MP

OCTAVUE®
BY
GSD GROUP

FISHEYE NETWORK CAMERA



Introducing the groundbreaking **FE360IP12MP** security camera, revolutionizing surveillance. Boasting an exceptional 12MP resolution and a 2.0mm lens providing a 180° horizontal field of view (wall mount) and an astonishing 360° (ceiling mount), this camera ensures unmatched coverage, capturing every angle with breathtaking clarity. Complete with audio input/outputs, an alarm, and a built-in microphone, it offers comprehensive audio surveillance and communication capabilities. Effortlessly connect via P2P for straightforward setup and receive instant notifications, staying informed of any detected activity in real-time. Elevate your security with the FE360IP12MP, setting new standards in advanced surveillance technology.

OnVIF® GMST NDAA Conformity




**12MP
RESOLUTION**



**12MP
Resolution**

2.0MM Lens



IR Up to 10M

**Two-Way
Communication**

WDR
↔



**Wall Mount 180°
Ceiling Mount 360°**

**Dewarping up to
Nine Divisions**



**IP66
Dustproof &
Water-Resistant**

**Micro SD Card
Slot up to 1TB**

**VIDEO**

Resolution	4000(H)×3000(V)
Image Sensor	1/2.3" Progressive CMOS
Min. Illumination	Color 0.03lux @ F2.0(AGC ON) ; B/W 0 lux @ IR ON
Shutter	1/5 ~ 1/20000s

LENS TYPE

Lens	2.0mm, horizontal FOV 180° (wall mount), 360°(ceiling mount)
F No.	F 2.0 ±5%

OPERATIONAL

Day and Night	IR cut filter with auto switch (Day/Night/Auto/ Image/Schedule)
WDR	DWDR
Video Compression	H.265/H.264/H.265+/H.264+/MJPEG
Video Bit Rate	256Kbps ~ 16Mbps
Tripple Stream	Yes
Resolution	
@25fps	Mainstream : 4000x3000 Substream : 1280x960, 640x480 Mobilestream : 640x480
@25fps	Mainstream : 3000x3000 Substream : 1080x1080, 720x720, 480x480 Mobilestream : 480x480
@25fps	Mainstream : 2560x2560 Substream : 1080x1080, 720x720, 480x480 Mobilestream : 480x480
@25fps	Mainstream : 2160x2160 Substream : 1080x1080, 720x720, 480x480 Mobilestream : 480x480
@25fps	Mainstream : 1520x1520 Substream : 1080x1080, 720x720, 480x480 Mobilestream : 480x480
@25fps	Mainstream : 1080x1080 Substream : 1080x1080, 720x720, 480x480 Mobilestream : 480x480
@25fps	Mainstream : 720x720 Substream : 1080x1080, 720x720, 480x480 Mobilestream : 480x480
AI Features	N/A

NETWORK


BLC	Support
ROI	Support
Video Analytics	N/A
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/ TSP, PPPoE, SMTP, NTP, UPnP, SNMP, HTTPS, FTP
System Compatibility	ONVIF(Profile S, G, T)
Interface	RJ45 10M / 100M
LED	3pcs(SMD)
IR Range	Up to 10m
SD Storage	Micro SD slot, up to 1TB
Alarm Trigger	Yes
Microphone	Yes
Speaker	Yes
Video Output	N/A
Reset Button	Yes
POE	Yes

GENERAL

Operating Conditions	-40~ +60°C/less than ≤ 95% RH
Ingress Protection	IP66
Power Supply	D12V/POE
Power Consumption	3.8-9.6W
Dimensions	Ø120*55mm
Weight	appr 400g



DIMENSIONS

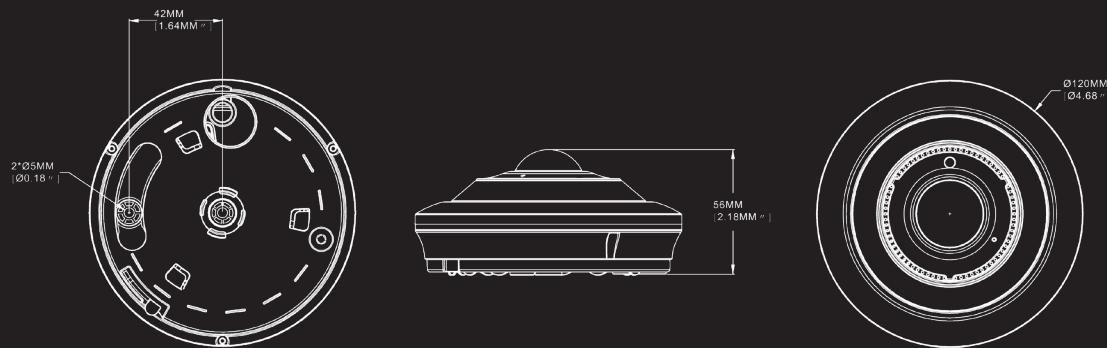


COMPATIBLE ACCESSORIES

CEILING MOUNT SOLUTION



 **CMB6-G**
CEILING MOUNT

CORNER MOUNT SOLUTION



 **COMB6**
CORNER MOUNT BRACKET

POLE MOUNT SOLUTION



 **PMB6**
POLE MOUNT BRACKET

WALL MOUNT SOLUTION



 **WMB6**
WALLMOUNT BRACKET

JUNCTION BOX



 **FEBASE**
JUNCTION BOX

DOWNLOAD THE OV CONNECT APP

