



SECURING YOUR WORLD



USER MANUAL

STATION5 VIDEO MANAGEMENT
SOFTWARE

Table of Contents

Chapter 1 Station 5 Introduction.....	4
1.1 Station 5 Overview.....	4
1.2 Station 5 Running Configuration.....	5
1.3 Station 5 Main Interface.....	5
Chapter 2 Registration and Login.....	9
2.1 Creating an Administrator Account.....	9
2.2 Logging into Station 5.....	11
2.3 Resetting the Password.....	15
Chapter 3 Device Login.....	17
3.1 Device Login.....	17
3.2 Remote Recording Playback.....	19
3.3 Remote Settings.....	21
3.4 System Configuration.....	22
Chapter 4 Device Management.....	23
4.1 Adding Devices.....	23
4.2 Modifying Device Information.....	29
4.3 Searching for Devices by Network Segment.....	30
4.4 Searching for Devices by Protocol.....	31
4.5 Deleting Devices.....	31
Chapter 5 Preview.....	33
5.1 Interface Introduction.....	33
5.2 Real-time Preview.....	36
5.3 Groups.....	42
5.4 PTZ Control.....	46
5.5 Sidebar AI Alarm Images.....	49
Chapter 6 Cruise Settings.....	52
6.1 Configuring Cruise Plans.....	52
6.2 Starting Cruise.....	55
Chapter 7 Remote Playback.....	56
7.1 Remote Playback Introduction.....	56
7.2 Playing Back Device Recordings.....	61
7.3 Export device recordings.....	61
7.4 Playing Back Device Images.....	66

7.5 Exporting Device Images.....	67
7.6 Playing Back Recordings Using Intelligent Search.....	67
7.7 Playing Back Recordings Using Tags.....	68
Chapter 8 Fisheye View Mode.....	70
9.1 Entering Fisheye Mode in Live View.....	73
9.2 Entering Fisheye Mode During Recording Playback.....	74
Chapter 10 Log Query.....	75
10.1 Querying Client Logs.....	75
10.2 Querying Remote Device Logs.....	76
Chapter 11 Topology Management.....	77
11.1 Related Operations.....	77
11.2 Topology Settings.....	79
Chapter 12 AI Search.....	79
12.1 Face Search.....	79
12.2 Human and Vehicle Search.....	81
12.3 Repeat Visitor Search.....	82
12.4 License Plate Search.....	86
Chapter 13 Data Analysis.....	88
13.1 Face Statistics.....	88
13.2 Human and Vehicle Statistics.....	89
Chapter 13 AIScene.....	90
13.3 Cross Counting.....	90
13.4 Hybrid Detection.....	98
13.5 Face Attendance.....	100
Chapter 14 Alarm Settings.....	102
14.3 Alarm Interface Introduction.....	102
14.4 Alarm Setting Operations.....	104
14.5 Alarm Trigger Window, Pop-Up, And Sound.....	104
Chapter 15 Account Management.....	106
15.3 Adding Users.....	106
15.4 Modifying Users.....	110
15.5 Deleting Users.....	110
Chapter 16 Local recording plan.....	111
Chapter 17 System Configuration.....	115
Chapter 18 Electronic Map Management.....	118
18.3 Adding Maps.....	118
18.4 Editing Maps.....	119

18.5 Modifying and Deleting Devices.....	121
18.6 Emap Monitoring.....	122
Chapter 19 Intelligent Configuration.....	124
19.3 Recognition Management.....	124
19.4 Attendance Management.....	132

Chapter 1 Station 5 Introduction

1.1 Station 5 Overview

Station 5 is used to manage several security monitoring devices; it works with devices such as XVRs, NVRs, and IP cameras.

The software features include:

- Resetting the password.
- Supporting usage by multiple users.
- Adding a single device, devices in batches, and devices with different protocols.
- Configuring devices remotely.
- Viewing videos from multiple devices in real time and playing back the recordings.
- Supporting the cruise view of videos from multiple devices.
- Playing back recordings and viewing captured images remotely.
- Configuring various types of alarm detections.
- Configuring electronic maps so you can locate devices anytime to deploy and manage the devices easily.
- Querying and exporting logs.
- Supporting face recognition, human and vehicle recognition, and license plate recognition.
- Supporting intelligent configuration and attendance management.
- Supporting intelligent scene preview, search, and configuration.
- Supporting face recognition, license plate recognition, human and vehicle detection, perimeter intrusion detection, line crossing detection, cross counting, crowd density detection, queue length detection, and more.
- Importing and exporting device information files with one click.
- Managing files, and viewing images and videos separately.


1.2 Station 5 Running Configuration

The software configuration involves the operating system, CPU, memory, and graphics card.

- Operating system: Windows 7, Windows 10, Windows 11, macOS 11.6 or later
- CPU: Intel® Core™ i5-4590 @ 3.3 GHz or higher
- Memory: 4 GB or higher
- Graphics card: NVIDIA GT 730 or higher

1.3 Station 5 Main Interface

The Station 5 main interface is shown in the following figure. Each part is described in the table below the figure.

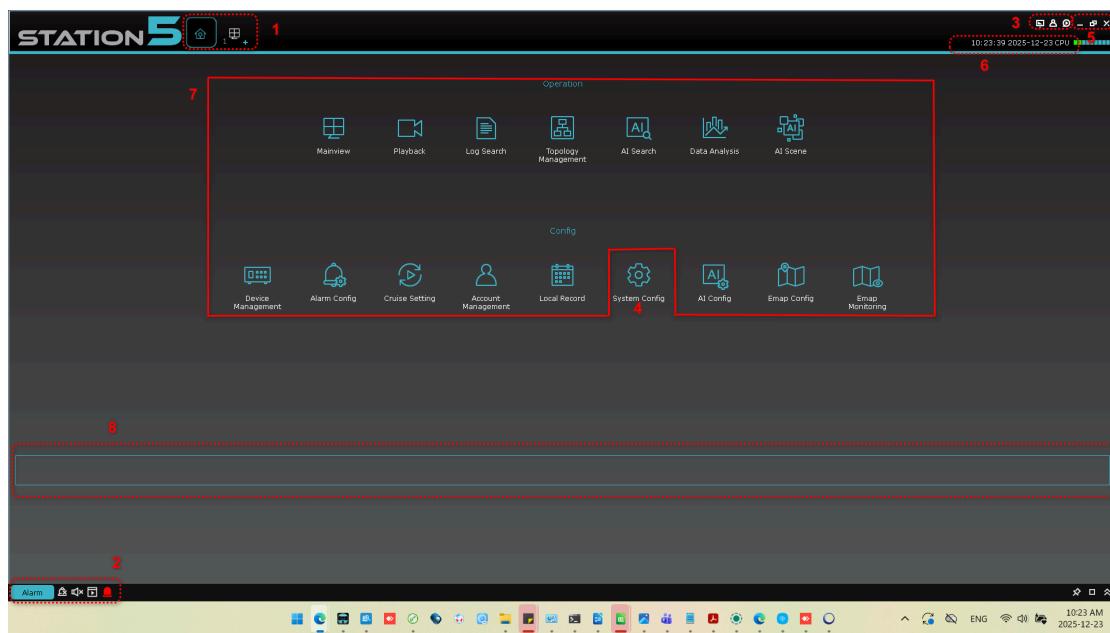

No.	Item	Description
1	Function tab	Start and log into Station 5. On the main interface that appears, you will find the supported functions. If you click a function icon, you go to the function page.
2	Event	to mute or unmute the alarm prompt.

	management	<p>to deny or allow the alarm pop-up.</p> <p>to clear alarms</p>
3	User management	<p>Click  to set the resolution.</p> <p>Click  to pop up the player.</p> <p>Click  and select  to lock the screen. Then a password is required to log into the system.</p> <p>Click  and select  to switch users.</p> <p>Click  and select  to view the software name and version number.</p>
4	System management	Click  to go to the System Config page, where you can set the language, auto login and password to be remembered, file type and storage path, and alarm sound.
5	Window management	<p>Click  to minimize the software window.</p> <p>Click  to maximize the software window.</p> <p>Click  to restore the default window layout.</p> <p>Click  to exit the software.</p>
6	System status	View the current system time, CPU usage, username, and login time.


7	Function list	<p>The function list is divided into an operation area and a configuration area. The functions are described as follows.</p> <ul style="list-style-type: none"> • Mainview Mainview: Connect cameras to the system to view videos in real time. When viewing a video, you can record the video locally, capture images, and use voice intercom, digital zoom, and cruise view. • Remote PlayBack Remote PlayBack: Select a date to view videos and images remotely, and cut and download them to local storage. • Local PlayBack Local PlayBack: View recordings or export them from the client. • Log Search Log Search: Query and export logs from the client both locally and remotely. • File Management File Management: Search for local recordings and images. • Face Attendance Face Attendance: Set the attendance time to record people who enter and leave. • AI Scene 	<ul style="list-style-type: none"> • AI Search AI Search: Search for and compare faces, humans and vehicles, and repeat visitors. Specify relevant conditions and search for all faces that meet the conditions. Summarize the identities and merge visitors with a duplicate identity. • Device Management Device Management: Add or remove device files, and manage device settings remotely. • Alarm Config Alarm Config: Set the device alarm type, which can be motion, I/O, video loss, PIR, and intelligent. • Cruise Setting Cruise Setting: Set the cruise channels and devices. • Account management • Account management: Add or delete sub-users, and modify sub-user permissions. • Local Record Local Record: Specify a file storage path and set the recording plan. • File Management File Management:
---	---------------	--	--

		<p>AI Scene: Count the number of people who enter and leave a channel or group, and raise an alarm if the number reaches the limit.</p> <ul style="list-style-type: none"> • Data Analysis <p>Data Analysis: Conduct an analysis of the data from faces, humans and vehicles, cross counting, heat maps, and attendance.</p>	<p>Manage recordings and images that are recorded manually.</p> <ul style="list-style-type: none"> • Emap Config <p>Emap Config: Place cameras on an electronic map so you can quickly know the location where something happens.</p> <ul style="list-style-type: none"> • AI config <p>AI config: Configure the device face library, settings, alarm, and attendance.</p>
8	Function tip	<p>When you hover the cursor over a function tab, the function description appears in that area in real time.</p>	


Chapter 2 Registration and Login

2.1 Creating an Administrator Account

During your first login to Station 5, set the administrator password and security questions as prompted by the system. The password is used to log into the system, and the security questions are used to reset the password by answering the questions.



Step 1: Double-click **STATION5**. The **Initialization** screen is displayed, as shown in the following figure:

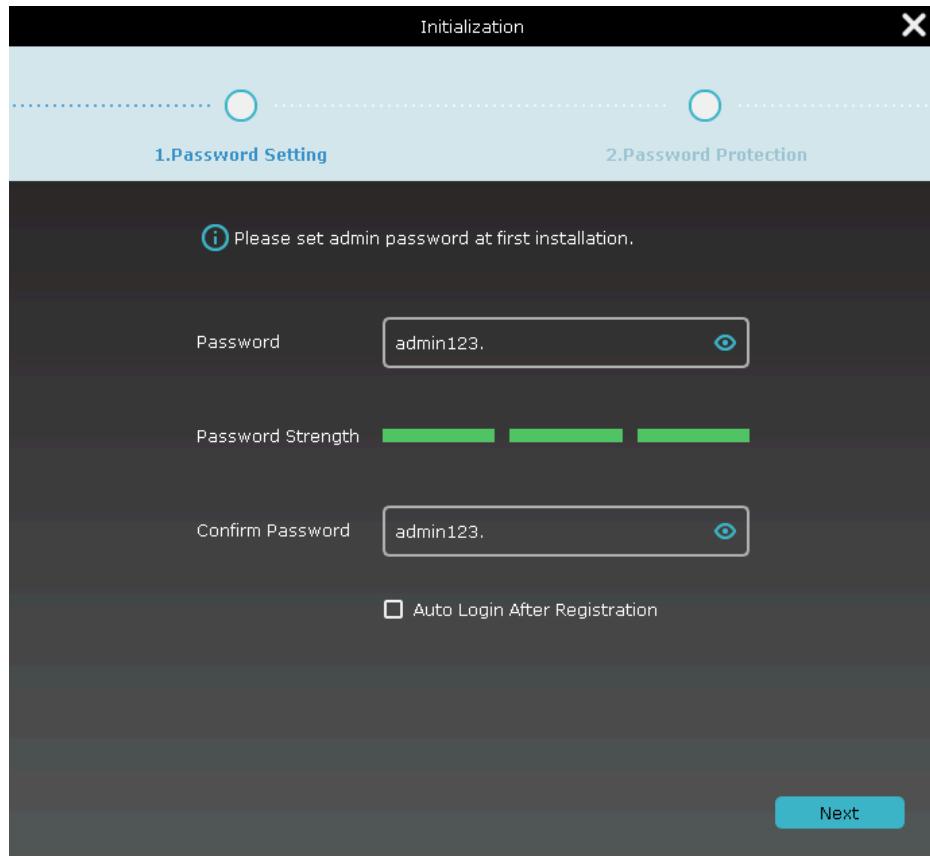


Set the administrator password. The parameters are described in the following table:

Parameter	Description
Password	Length: 8 to 32 characters without spaces; allowed: uppercase letters, lowercase letters, digits, and special characters.
Password Strength	Password complexity. Red indicates that the password is not complex or secure, and green indicates that the password is complex and secure. Set a highly secure password as prompted by the password strength.
Confirm Password	Ensure that the passwords are consistent.
Auto Login After Registration	If selected, you log into the system automatically after registration. Otherwise, the login screen is displayed.

Step 2: Click **Next** after you set the password.


Step 3: Select questions and enter the answers. If you forget your password, you can reset the password by answering the questions.

Step 4: Then click **Finish** to save the settings.

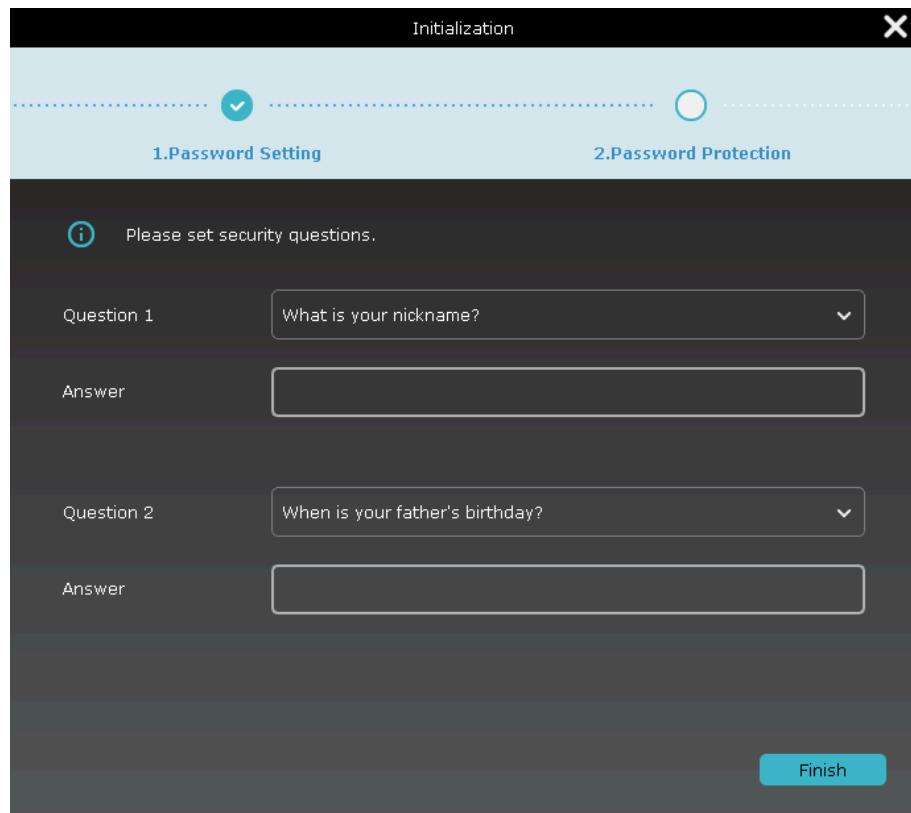


2.2 Logging into Station 5

After device initialization, enter the account and password to log into Station 5.



Step 1: Double-click **STATIONS**.

The login screen is displayed, as shown in the following figure:

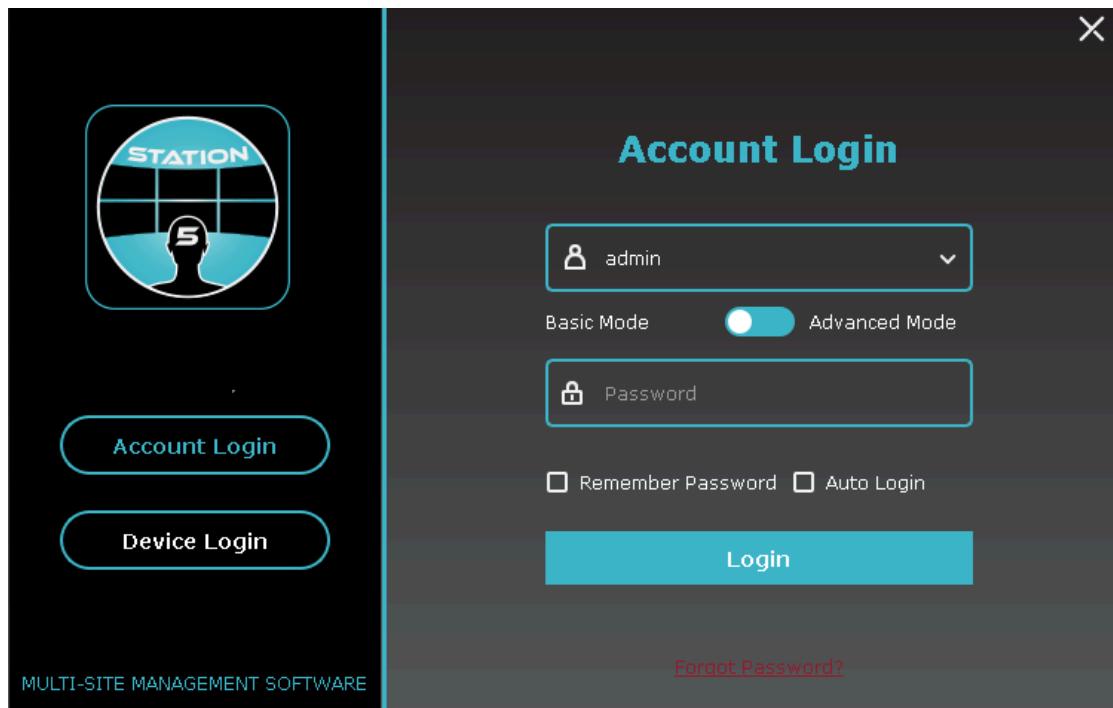


Step 2: Set parameters. The parameters are described in the following table:


<input type="text" value="User name"/>	Enter the username and password.
<input type="text" value="Password"/>	
Remember Password	If selected, the system has remembered the password when you log in again.
Auto Login	If selected, the password is remembered, and you log into the system automatically.
Forgot Password?	If you forget your password, you can reset the password by answering the questions. For more information, see Section 2.3 "Resetting the Password".

Step 3: Click **Login**.


The system interface is displayed, as shown in the following figure:

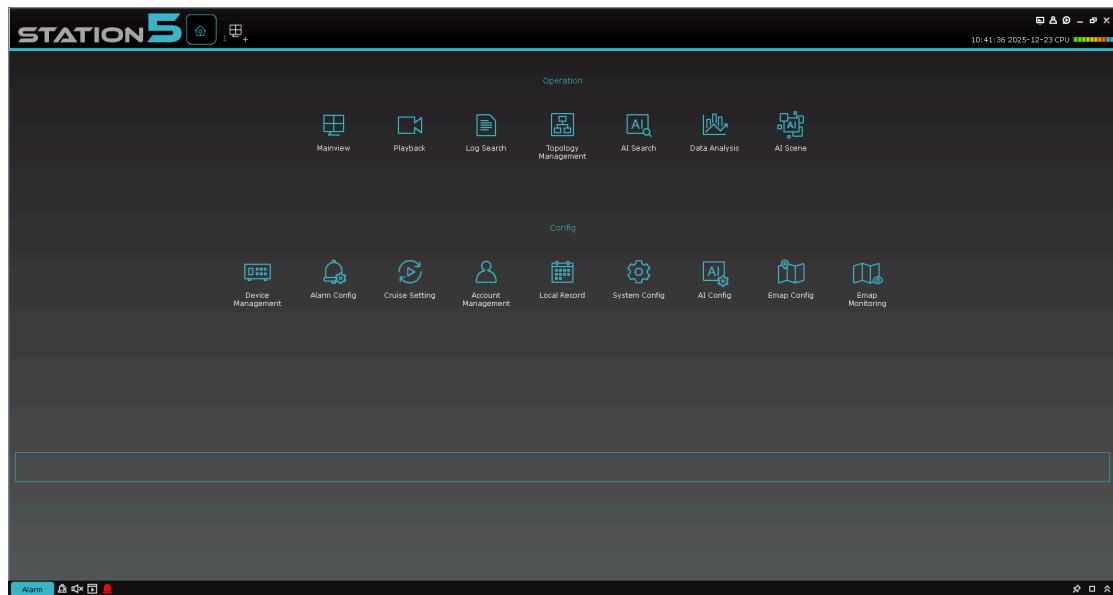

Log into Station 5 through device login.

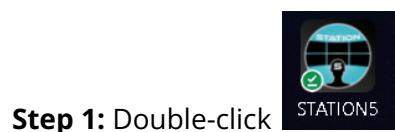


Step 1: Double-click

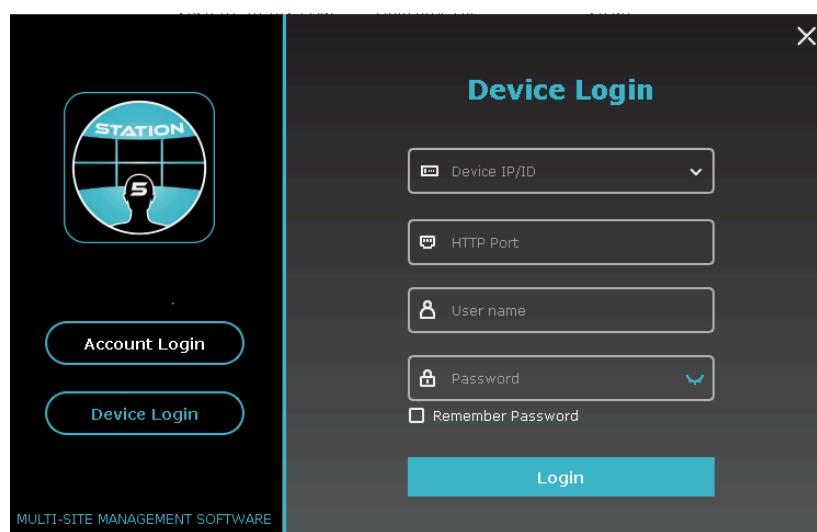

Step 3: Set parameters. The parameters are described in the following table:

Parameter	Description
<input type="text"/> Device IP/ID	Enter the device IP/ID.
<input type="text"/> Client port	Enter the port number.
<input type="text"/> User name	Enter the username and password.
<input type="text"/> Password	
<input type="checkbox"/> Remember Password	If selected, the system has remembered the password when you log in again.

Step 4: Click **Login**. The system interface is displayed, as shown in the following figure:

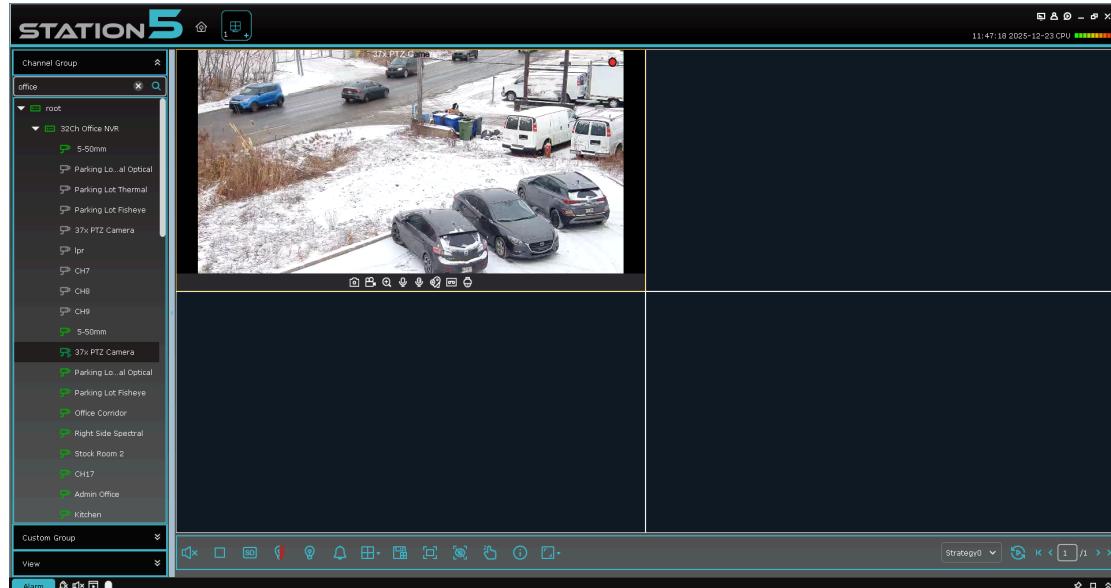

Note: For more information about device login, see Chapter 3 "Device Login".


2.3 Resetting the Password

If you forget your password, you can reset the password by answering the questions.




Step 1: Double-click **STATIONS** to go to the login screen.

Step 2: Click [Forgot Password?](#). The screen of password security questions is displayed, as shown in the following figure:

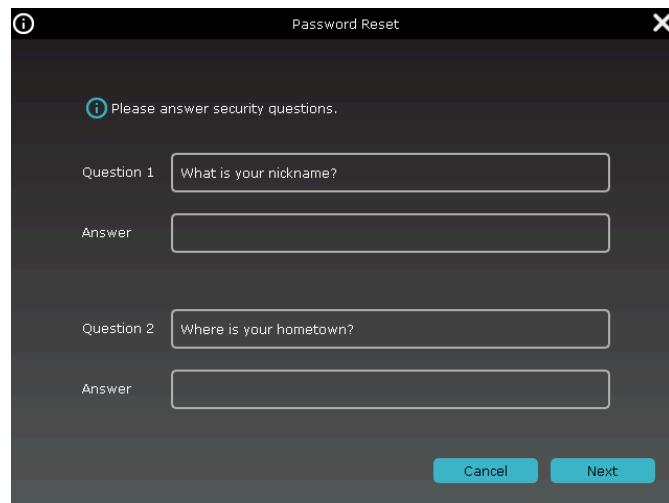

Step 3: Answer the questions and click **Next**. The password reset screen is displayed, as shown in the following figure:

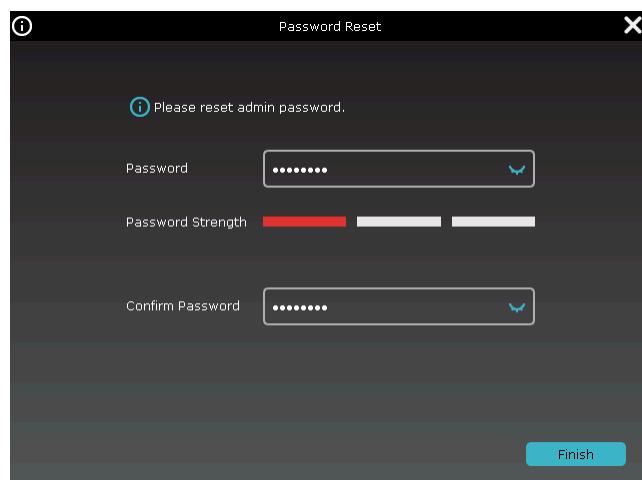


Step 4: Set the password. The parameters are described in the following table:

Parameter	Description
Password	Length: 8 to 32 characters without spaces; allowed: uppercase letters, lowercase letters, digits, and special characters.
Password Strength	Password security. Red indicates that the password is insecure, and green indicates that the password is secure.
Confirm Password	Ensure that the passwords are consistent.

Step 5: Click **Finish** to save the settings.

Chapter 3 Device Login

3.1 Device Login




Step 1: Double-click **STATION5**.

Step 2: After the login screen is displayed, click **Device Login** on the left. The device login screen is displayed.

Step 3: Set parameters. The parameters are described in the following table.


Step 4: Click **Login** to go to the following page:

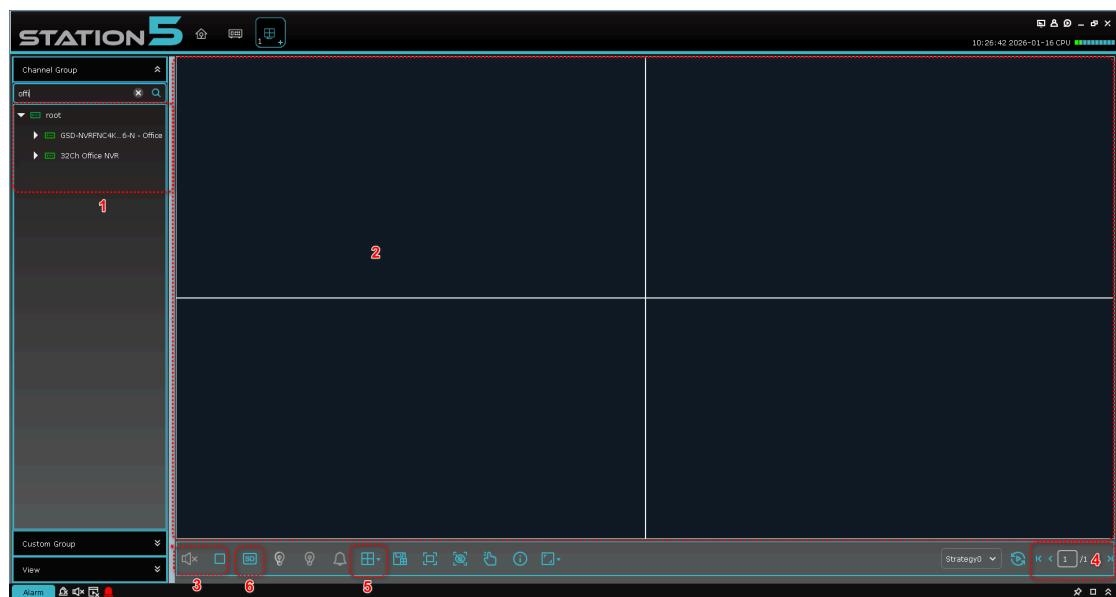

No.	Item	Description
1	Device area	View all the devices bound with the current IP address.
2	Preview area	View the windows of devices if the devices are connected properly.
3	Control area	Control the play and stop of all windows.
4	Page switch area	Switch pages if there are multiple preview pages.
5	Screen area	Set the number of windows, full screen mode, manual alarm switch, and alarm display switch.
6	Stream area	Select a steam to play.

3.2 Remote Recording Playback

Step 1: On the function tab, click **Remote Playback** to go to the remote recording playback page, as shown in the following figure:

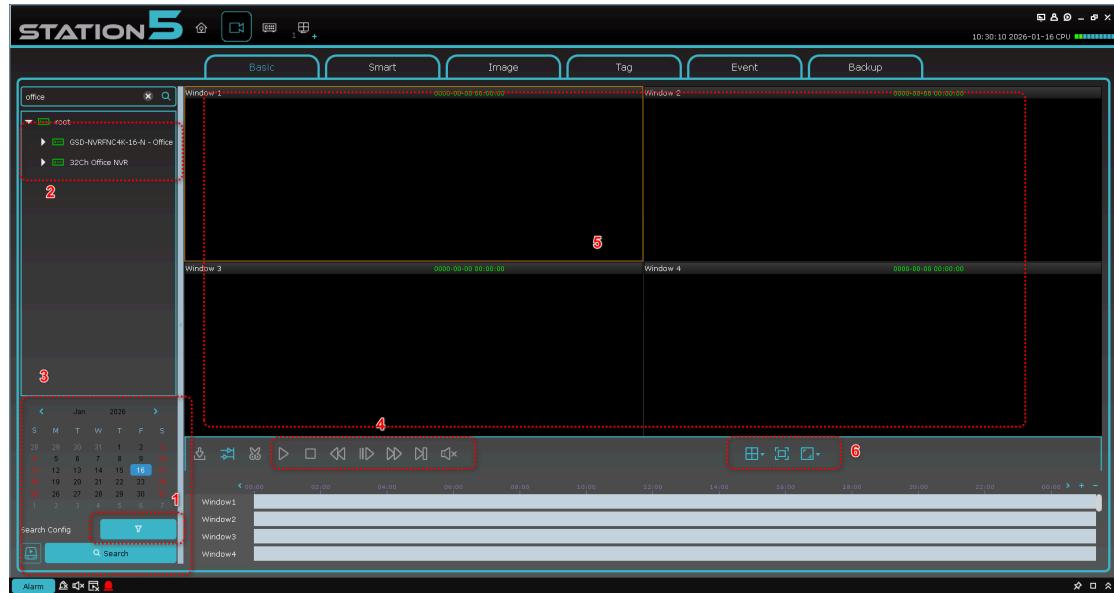


Each part is described in the following table:

No.	Item	Description
1	Date	Select the time period for search.
2	Channel area	Select the channel for playback.
3	Search area	Select the recording type and stream type for search.
4	Playback control area	Control the recording playback and sound.
5	Recording playback area	View videos and split windows through multiple ways. When viewing a video, you can capture images, record the video, and use digital zoom.
6	Video window and	to select the number of video windows.

	display mode	to enter full screen mode for a video window.
--	--------------	---

Device Recording Download

Step 1: Select a video window that has enabled recording, and click  in the playback control area. A dialog box is displayed, as shown in the following figure:

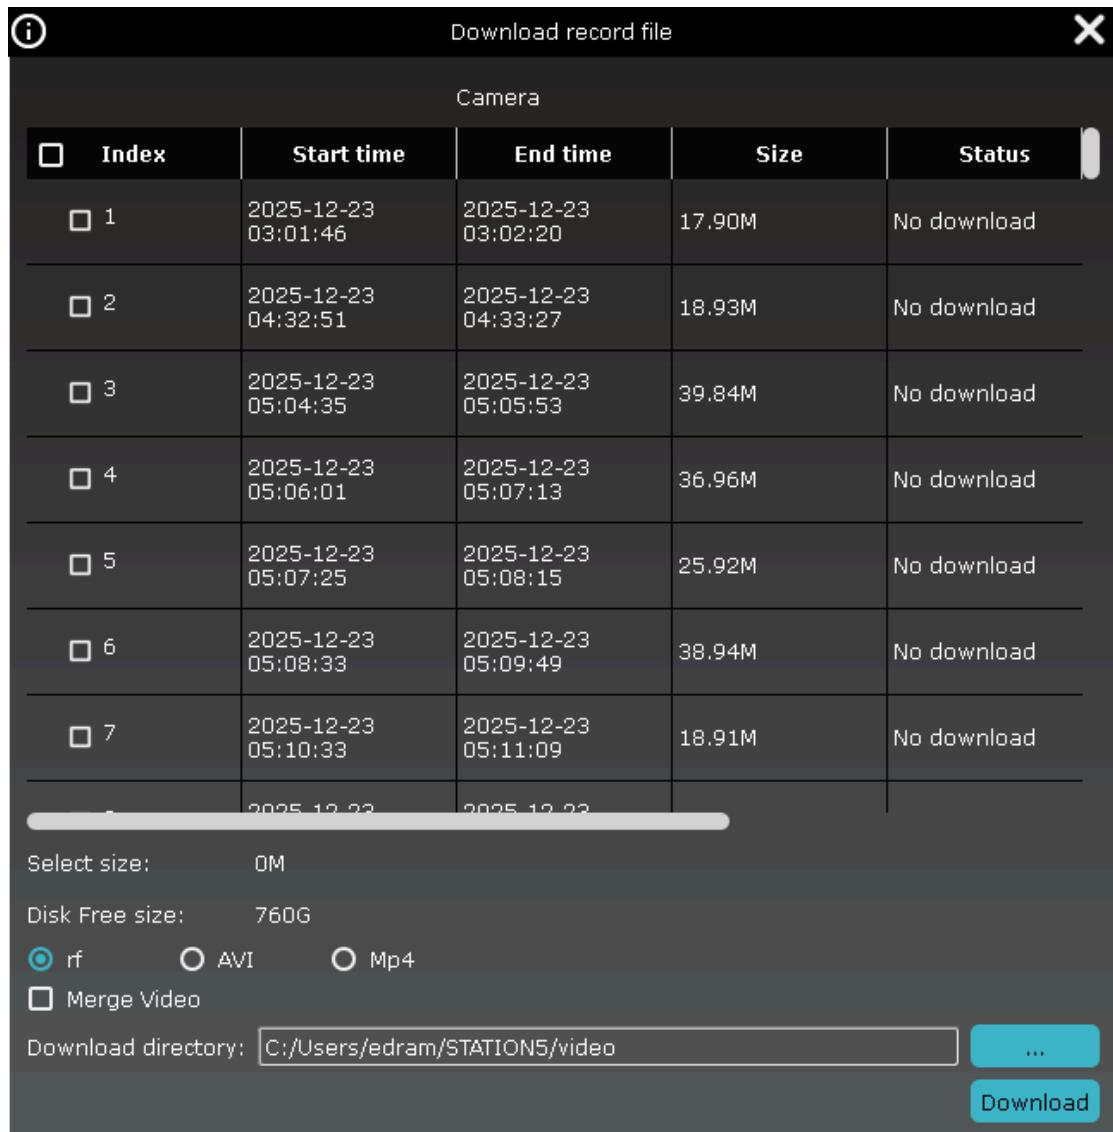

Step 2: Select the recording you want to download and specify the storage path.

Step 3: Click **download**.

Note: For information about **System Config**, see Chapter 19 "System Configuration".

3.3 Remote Settings


On the page below, you can set device parameters remotely.

The screenshot shows the STATION5 software interface. At the top, there are tabs for 'All equipment', 'Auto Search', 'Grouping', and 'Custom Group'. Below this is a search bar and a note: 'Path: Don't drop the page or turn off power when upgrading.' There is also a 'Upgrade (Up to ten devices)' button. The main area is a table with columns: No., Device Name, IP, Device Type, Protocol, Version, Status, Port, ChannelNum, ID, and Operation. The 'Operation' column contains icons for various remote actions. The table lists numerous devices, including GSD-NVRNC4K-08-N, GSD-NVRNC4K-08-N, GSD-NVRNC4K-04-N, and various DBW5MP-POE models. The interface is in light mode with a blue header.

The screenshot shows a detailed view of the STATION5 software interface for managing IP channels. On the left, there is a sidebar with sections for 'Device Name', 'Channel', 'Record', 'Alarm', 'AI', and 'Network'. The main area is titled 'IP Channels' and contains a table with columns: Channel, Operation, Status, Port, Manufacturer, Device Type, Protocol, and Firmware V. The table lists 19 channels (CH1 to CH19) with various settings. The interface is in light mode with a blue header.

3.4 System Configuration

On the function tab, click **System Config** to go to the system configuration page. For detailed operations, see Chapter 19 "System Configuration".

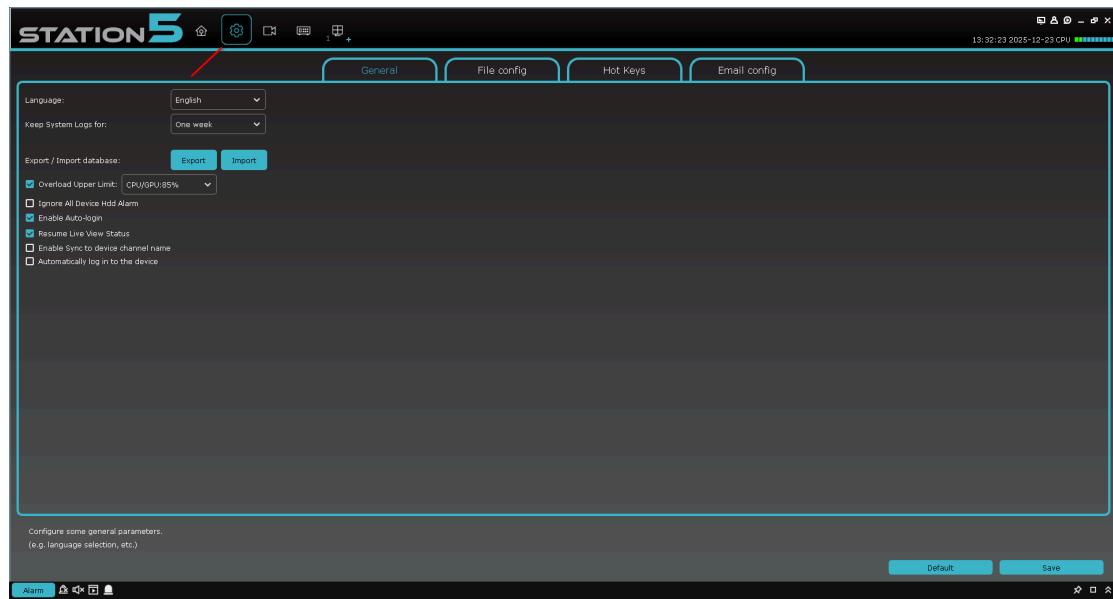

Chapter 4 Device Management


On Station 5, you can add devices (such as IP cameras, NVRs, and XVRs) through auto search, adding a single device, and adding devices in batches. After adding devices, you can configure and operate the devices remotely.

4.1 Adding Devices

Station 5 supports multiple ways to add devices. Choose a suitable method according to the number of devices to be added, network segment, and other factors.

1. Auto search is recommended when you need to add devices in batches and the devices are in the same network segment, or when you do not know the device IP address but know the network segment.

Step 1: On the devices page,  click to go to the main menu. On the homepage, click **Device Management** in the configuration area. The device management page is displayed, as shown in the following figure:

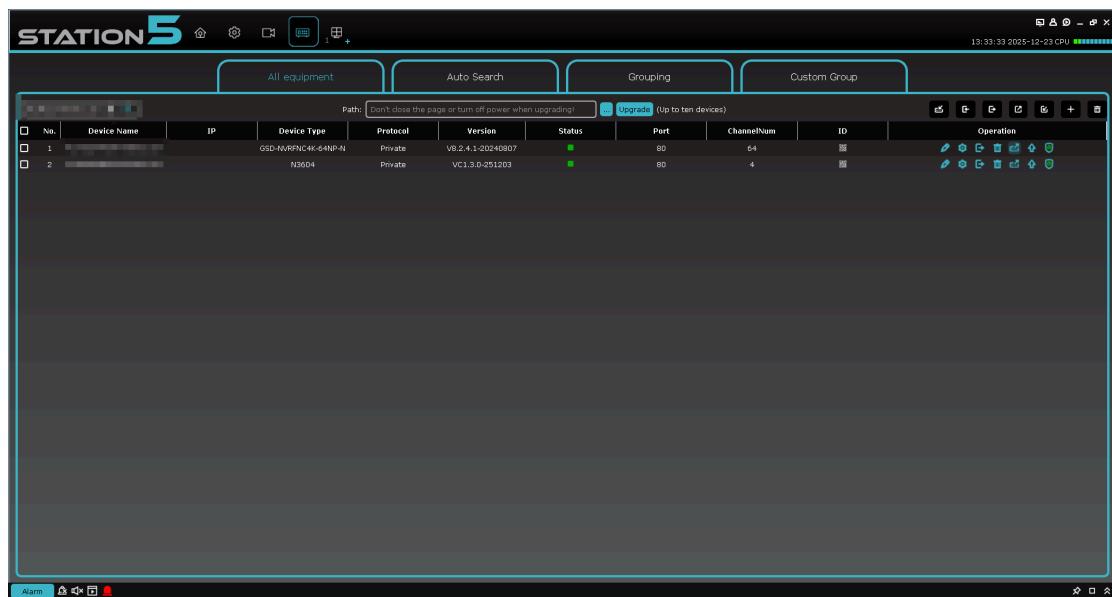

Step 2: Click **Auto Search** on the device management page to go to the **Auto Search** page, as shown in the following figure:

Step 3: Select the device you want to add, and click **+**. Alternatively, select one or more devices and click **Add** in the lower right corner. A dialog box is displayed, as shown in the following figure:



Step 4: Enter the username and password of the device that has been logged into, and click **Add** to complete the operation.

The added devices are displayed, as shown in the following figure:

Note: The added devices are logged into through port 80 by default.

The supported operations on the page are shown in the following table:

Icon	Description
	Click the icon. The Modify Device window appears, where you can modify device information, including the device name, login type, IP address or domain name, protocol, port, username, and password.
	Click the icon to go to the Device Remote Setting page, where you can configure the device recording channel, recording, network, alarm event, storage, system, among others.
	Click the icon to delete the device.
	Green: The device is connected properly. Red: Unactivated. You need to set the initial password. Yellow: The login information is incorrect

	or the account is locked. Gray: The device cannot be connected.
 and 	Export or import device information. For detailed operations, see 3 "Add a device by importing the configuration file".

Note: After you add devices, the **Auto Search** page remains open that you can continue to add devices. After you add devices, go to the device list to check whether the devices are online.

2. Add a device manually.

We recommend you add a device manually if you add a single device and know the device IP address or domain name.

Step 1: On the **Device Management** page, click . The **Add Device** window is displayed, as shown in the following figure:

Info icon Add Device Close icon

Device Name:

Login Type: ID

ID:

Protocol: Private

Http Port:

User Name:

Password:

Step 2: Set parameters. The parameters are described in the following table:

Parameter	Description
Device Name	The device name. We recommend you name a device after the device monitoring area for maintenance.
Login Type	The method to add the device. <ul style="list-style-type: none">+ IP/Domain: Add the device through the device IP address or domain name.+ P2PID: Add the device through the device serial number.
IP/ID	Set this parameter if you choose to add the device through the IP address or domain name. The device IP address or domain name. Set this parameter if you choose to add the device through P2PID. The device serial number.
Protocol	Select a private protocol or other protocols.
Web/Media Port	Enter a web or media port. If you log in using a web port, more functions are supported, including AI config and AI scene.
User Name	The username to log into the device.
Password	The password to log into the device.

Step 3: Click **Add** to add the device.

Note: To cancel the addition, Click **Cancel** to exit the **Add Device** window.

After the device is added, it connects to Station 5 automatically. Then the status is , otherwise, the status is .

3. Add a device by importing the configuration file.

Step 1: On the **Device Management** page, click . A dialog box is displayed.

Step 2: Select and open the device .xml file that is saved locally.

Step 3: Click **Open** to import the device.

Note: Use this method if the device was added before and the device configuration file was exported to local storage.


4.2 Modifying Device Information

Modify device information if the information (such as the username, password, and IP address or domain name) is incorrect.

Note: This section describes how to modify device information.

Step 1: On the **Device Management** page, click . The **Modify Device** window is displayed.

Step 2: Modify the device information.

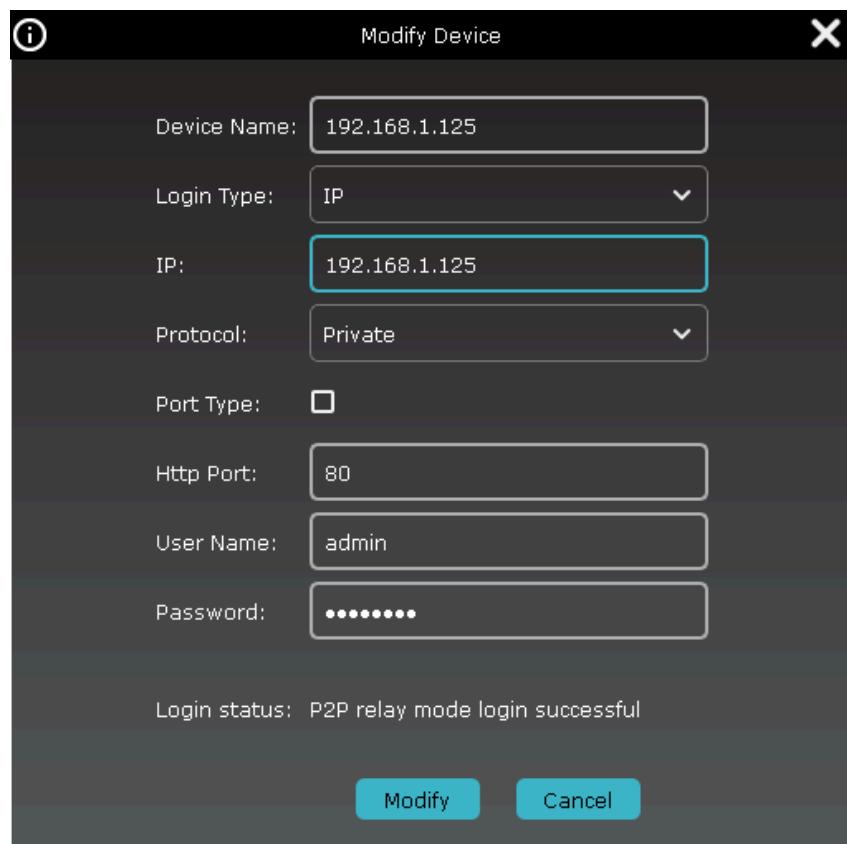

Step 3: Click **Modify** to save the changes.


4.3 Searching for Devices by Network Segment

By setting a network segment, you can search for and find all devices in the network segment.


Step 1: On the **Device Management** page, click **Auto Search**. The auto search page appears.



Step 2: Click **Filter**. The **Search by segment** dialog box is displayed, as shown in the following figure:

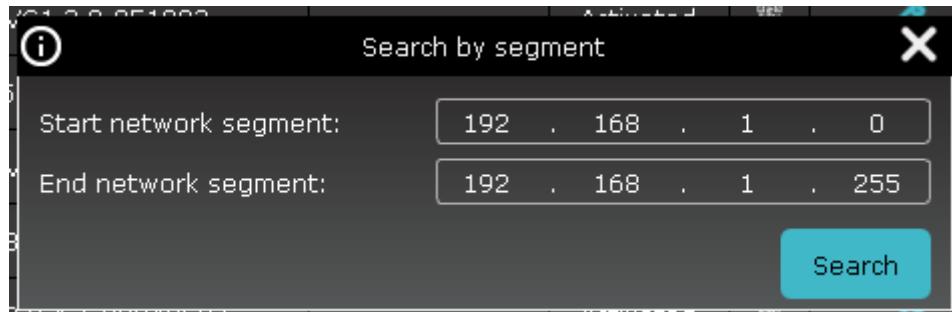


Step 3: Enter the network segment as needed and click **Search**. The search results are shown in the following figure:

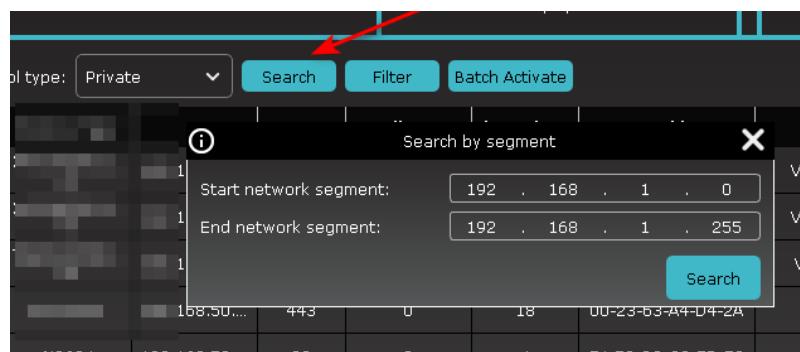

4.4 Searching for Devices by Protocol

Step 1: On the **Device Management** page, click **Auto Search**. The auto search page appears, as shown in the following figure:

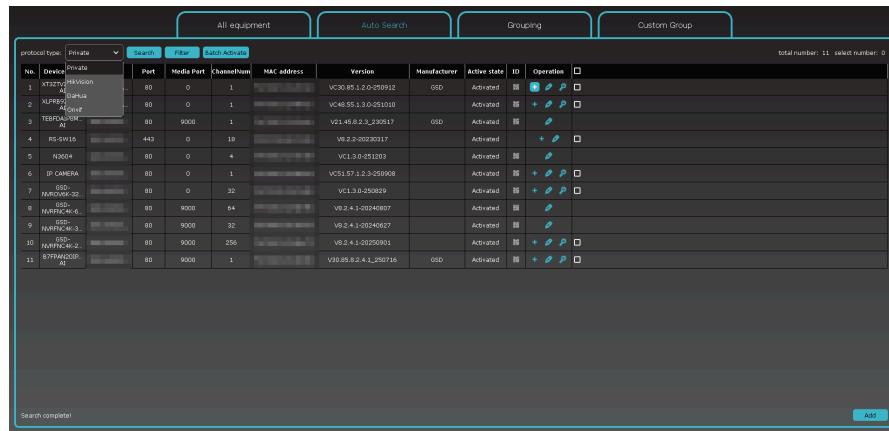

No.	Device	Port	Media Port	ChannelNum	MAC address	Version	Manufacturer	Active state	ID	Operation
1	XT2222-Hikvision	80	0	1	████████████████	V20.81.3.2.0-250912	GSD	Activated	<input checked="" type="checkbox"/>  	<input type="checkbox"/>
2	XIPRE- Dahua	80	0	1	████████████████	V24.55.3.3.0-251010	GSD	Activated	<input checked="" type="checkbox"/>  	<input type="checkbox"/>
3	TEFR01-N AI	80	9000	1	████████████████	V21.49.8.2.3_250517	GSD	Activated	<input checked="" type="checkbox"/>  	<input type="checkbox"/>
4	RS-SW16	442	0	10	████████████████	V8.2-2-20230317	GSD	Activated	<input checked="" type="checkbox"/>  	<input type="checkbox"/>
5	NS04	80	0	4	████████████████	V21.3-0-251003	GSD	Activated	<input checked="" type="checkbox"/>  	<input type="checkbox"/>
6	IP CAMERA	80	0	1	████████████████	V25.57.1.2.3-250908	GSD	Activated	<input checked="" type="checkbox"/>  	<input type="checkbox"/>
7	GSD- NVR05X-32	80	0	32	████████████████	V21.3-0-250629	GSD	Activated	<input checked="" type="checkbox"/>  	<input type="checkbox"/>
8	GSD- NVR05C-6	80	9000	64	████████████████	V9.2-1-0-20240807	GSD	Activated	<input checked="" type="checkbox"/>  	<input type="checkbox"/>
9	GSD- NVR05C-3	80	9000	32	████████████████	V9.2-1-0-20240537	GSD	Activated	<input checked="" type="checkbox"/>  	<input type="checkbox"/>
10	GSD- NVR05C-2	80	9000	256	████████████████	V9.2-1-0-20250901	GSD	Activated	<input checked="" type="checkbox"/>  	<input type="checkbox"/>
11	SYTRONIC- AI	80	9000	1	████████████████	V20.85.8.4.1_250716	GSD	Activated	<input checked="" type="checkbox"/>  	<input type="checkbox"/>

Step 2: In the **protocol type:** **Private** drop-down list, select other protocols, such as the Onvif, Hikvision, Dahua protocol, and click **Search**. The search results are displayed, as shown in the following figure:

Step 3: Add the devices you need. For detailed operations, see Section 4.1 "Adding Devices".

4.5 Deleting Devices


If you do not need to manage the added devices, delete them. You can delete a single device or delete devices in batches.

1. Delete a single device.

Step 1: On the **Device Management** page, find the device you want to delete, and click



A dialog box is displayed, as shown in the following figure:

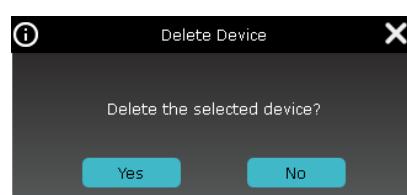

Step 2: Click **Yes** to delete the device.

Click **No** to cancel deletion.

2. Delete devices in batches.

Step 1: On the **Device Management** page, select the checkbox in front of the devices you want to delete.

Step 2: Click  in the upper right corner. A dialog box is displayed.

Step 3: Click **Yes** to delete the selected devices.


Click **No** to cancel deletion.

Chapter 5 Preview

After you add devices on Station 5, you can go to the preview page to view videos in real time.

5.1 Interface Introduction

This section describes each part and function by area.

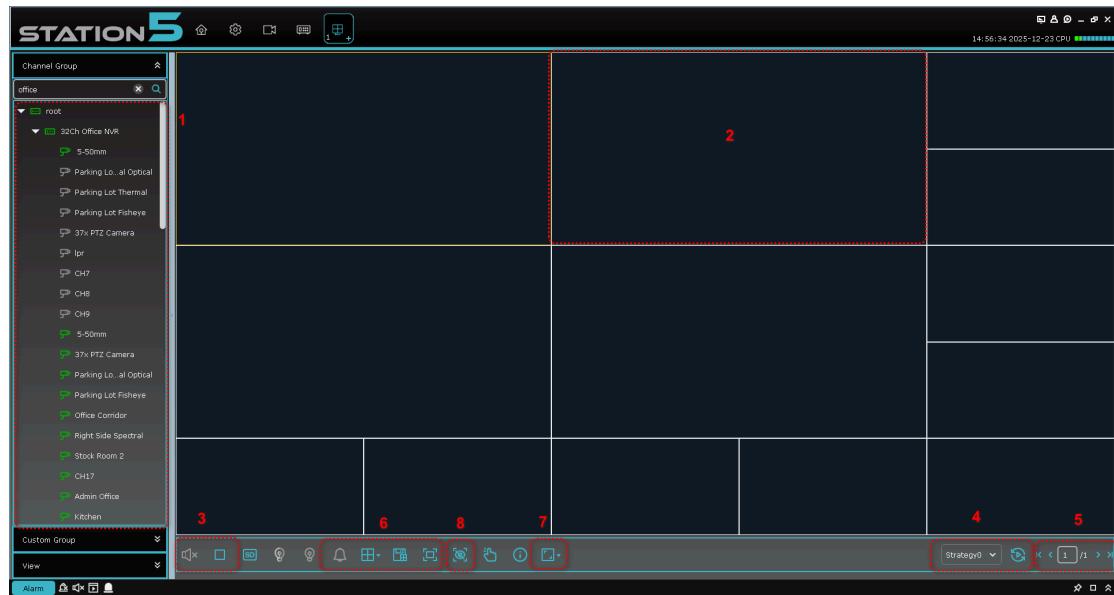

From the main menu, choose **Mainview** to go to the preview page. The functions on the preview page are described in the following table:

No.	Item	Description
1	Device tree	Groups are divided by default. Double-click to open a group, which contains the added devices. Drag a device or channel, or double-click a channel to preview the channel. Right-click to select a main stream, open or close all channels, start playback and intercom, and synchronize channel names.
2	Preview window area	View videos and split windows through multiple ways. When viewing a video, you can capture images, record the video, enable cruise view, use voice intercom, use digital zoom, and more. For detailed operations, see Section 5.2 "Real-time Preview".
3	Audio control area	Control the sound and stop all windows.
4	Cruise selection area	When cruise plans exist, you can select a cruise plan for this area to enable cruise.
5	Page switch area	When multiple pages exist on the preview page, you can switch pages.

6	Video ratio, window number setting, and view creation area	<p> Remove the alarm and recording identifiers from the preview window.</p> <p> Adjust the aspect ratio.</p> <p> Display in full screen mode.</p> <p> Adjust the number of windows.</p> <p> When multiple fixed devices are connected and you often need to preview their monitoring windows, you can enable the preview windows and save them as a view. Later, when you open the view, you preview the windows of the multiple devices. The created view is added to the view tab in the device list area. The view can also be added to cruise plans.</p>
7	List switch area	<p> Click the icon to go to the view tab and check custom views.</p> <p> Click the icon to go to the PTZ control tab to control devices through PTZ.</p>
8	Intelligent alarm display	<p> Click to view the alarm pop-up in the sidebar and view intelligent alarms from the added devices on Station 5.</p>

5.2 Real-time Preview

View camera images in real time, record videos locally, capture images, use voice intercom, use digital zoom, and more.

1. Enable preview.

Use one of the following methods to enable preview:

- + Select a preview window, and double-click the desired device in the device list area.
- + Drag the desired device in the device list to the preview window.
- + Right-click a device group, and select **Open all ch** to open the preview window of device channels.

Note: If you enable preview, you can also enable the preview of all cameras under the view.


2. Operate preview.

The supported operations in preview mode are shown in the following table:

No.	Task	Description	Operation
1	Manual recording	Save a manual recording to local storage.	Select a video window that has enabled preview, and click  in the window or right-click to select  to start recording. Click  again or right-click to select  to stop recording. Note: To set the recording storage path, go to the configuration area and click System Config .

2	Manual capture	Capture an image manually.	Select a video window that has enabled preview, and click  in the window or right-click to select  Screenshot Note: To set the image storage path, go to the configuration area and click System Config.
---	----------------	----------------------------	--

3	Voice intercom	Use voice intercom with connected devices.	Select a video window that has enabled preview, and click  in the window or right-click to select  to start voice intercom. Click  again or right-click to select  Start talk to stop voice intercom. Note: Voice intercom is supported between the client and devices.
4	Digital zoom	Zoom in the selected area in a video.	Select a video window that has enabled preview, and click  in the window. Click the preview window and hold to select an area of interest, which can be zoomed in many times. Click  again to close digital zoom.
5	Add a tag	Add a time tag.	Select a video window that has enabled preview or playback, and click  at the bottom of the window.

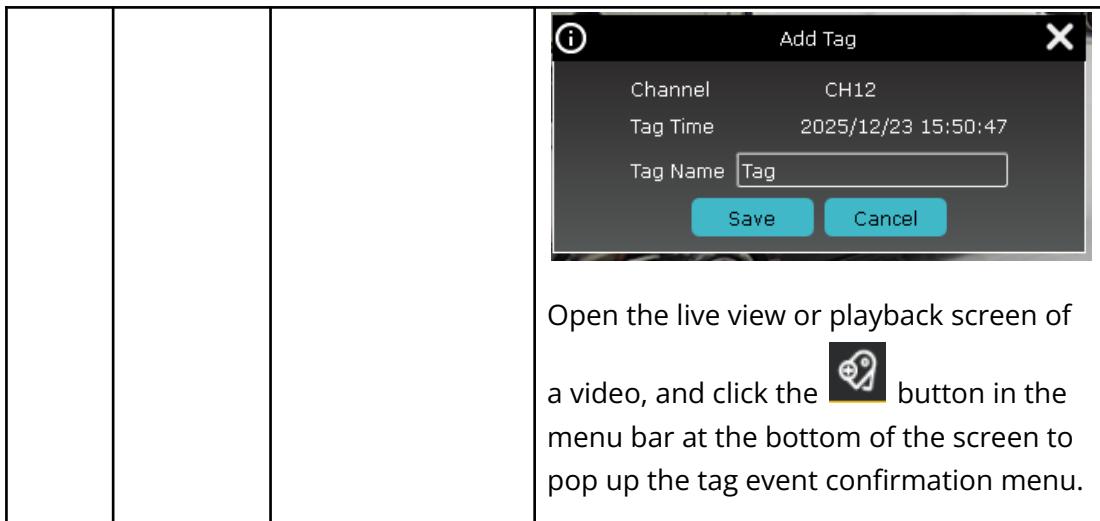

Open the live view or playback screen of
a video, and click the  button in the
menu bar at the bottom of the screen to
pop up the tag event confirmation menu.


6	Quick playback	Quickly play back a recording 10 minutes ago before you view the recording currently.	Select a video window that has enabled preview, and click  in the window to enter quick playback.  Click  to pause playback, click  to enable or disable the sound, and click  to exit playback and enter the preview page. You can also drag the progress bar to select the playback position.
7	Close a window	None	Right-click the window you want to close, and select  Stop preview
8	Open all channels	None	Right-click a device group, and select  Open all ch Close all ch
9	Full screen mode	Enter full screen mode for a specified window.	Select a video window that has enabled preview, and right-click to select  , and double-click to open the window that needs full screen. Or, double-click to open the window that needs full screen  and right-click to select  to enter full screen mode.
10	Adjust window ratio	Adjust the aspect ratio.	In the lower right corner of the video window, select  to adjust the window ratio.

11	Select windows	Select the number of windows on a page.	In the lower right corner of the video window, select  to set the number of windows.
----	----------------	---	--

12	Fisheye View Mode	Only available for fisheye devices. The fisheye installation mode is related to the view mode. Different installation modes differ in view modes.	Select a video window that has enabled preview. Right-click to select  . Select a view mode you need based on the actual situation. For more information, see Chapter 9 "Fisheye View Mode".
13	Fisheye installation mode	Only available for fisheye devices. Select an installation mode based on the device installation. Fisheye installation modes include  (ceiling mounting),  (wall mounting), and  (ground mounting).	Select a video window that has enabled preview, and right-click  to select  to enter fisheye mode. Select an installation mode based on the device installation. For more information, see Chapter 9 "Fisheye View Mode".
14	Switch channel stream type	The supported stream types include main stream, substream, and mobile stream.	Find a device channel, right-click to select the desired device, and select the stream type as needed.
15	Switch all channel stream types with one click	The supported stream types include main stream, substream, and mobile stream.	In a device group, right-click to select the desired device to switch all channel stream types to a stream type as needed with one click.

2. Adjust the number of monitoring windows

Click  in the window setting area to adjust the number of view windows.

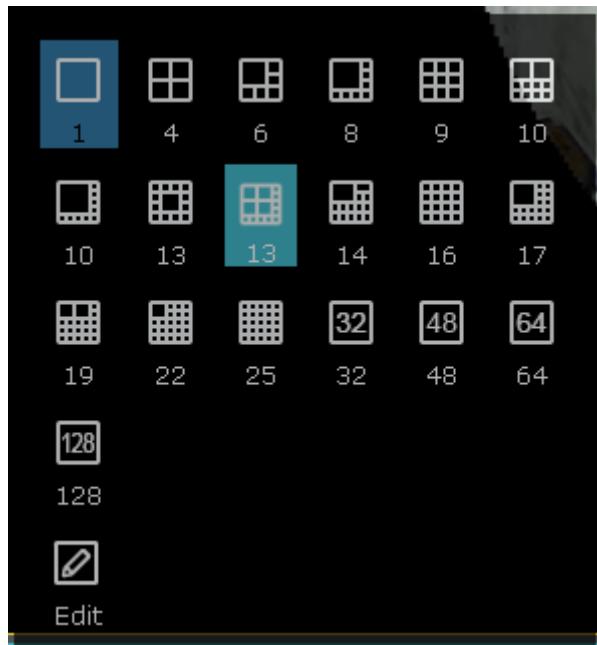


5.3 Groups

1. Add a group:

Go to Device Management and then click Custom Group,


Only groups can be added from **root**. Click **New Group** as shown in the following figure:


Name the group and click **OK** to create the group.

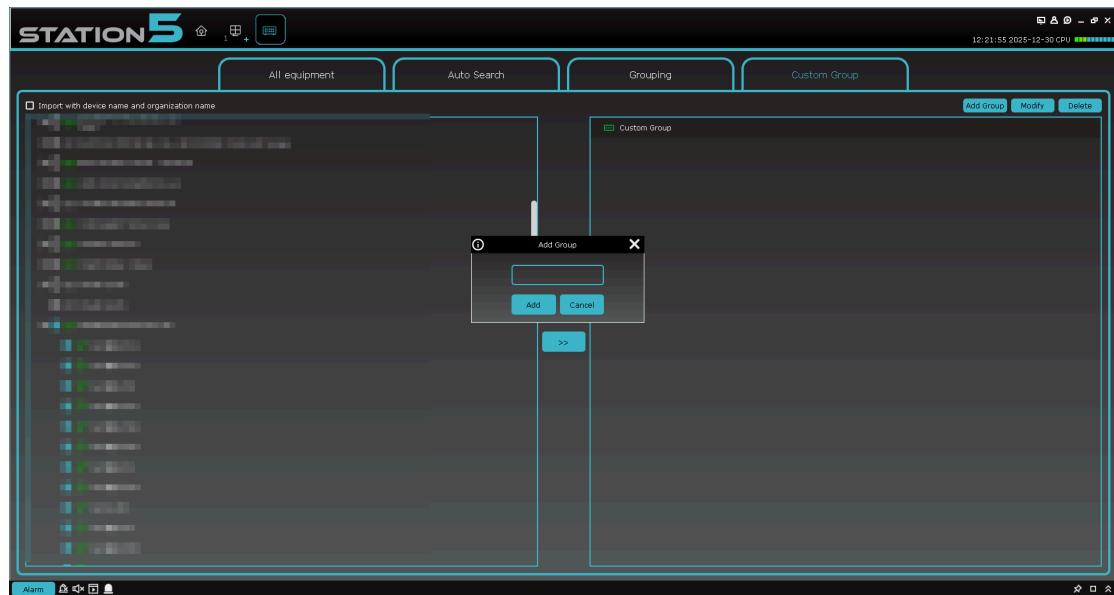


2. Add a view tab:

In the view section in Mainview , right-click Root to select **New view TAB**.
The view tab page is shown in the following figure:

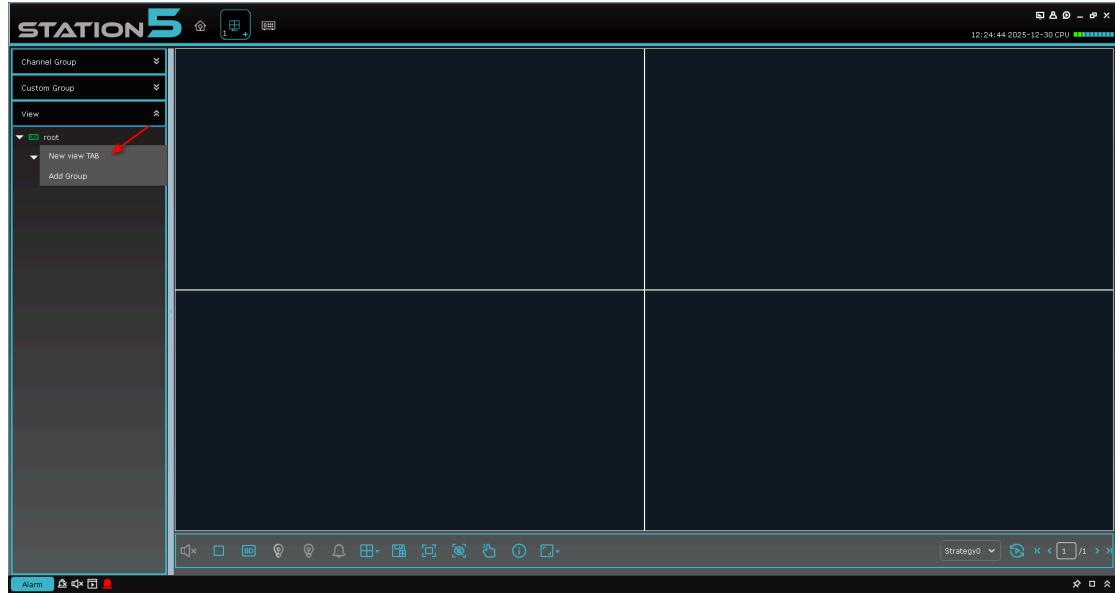

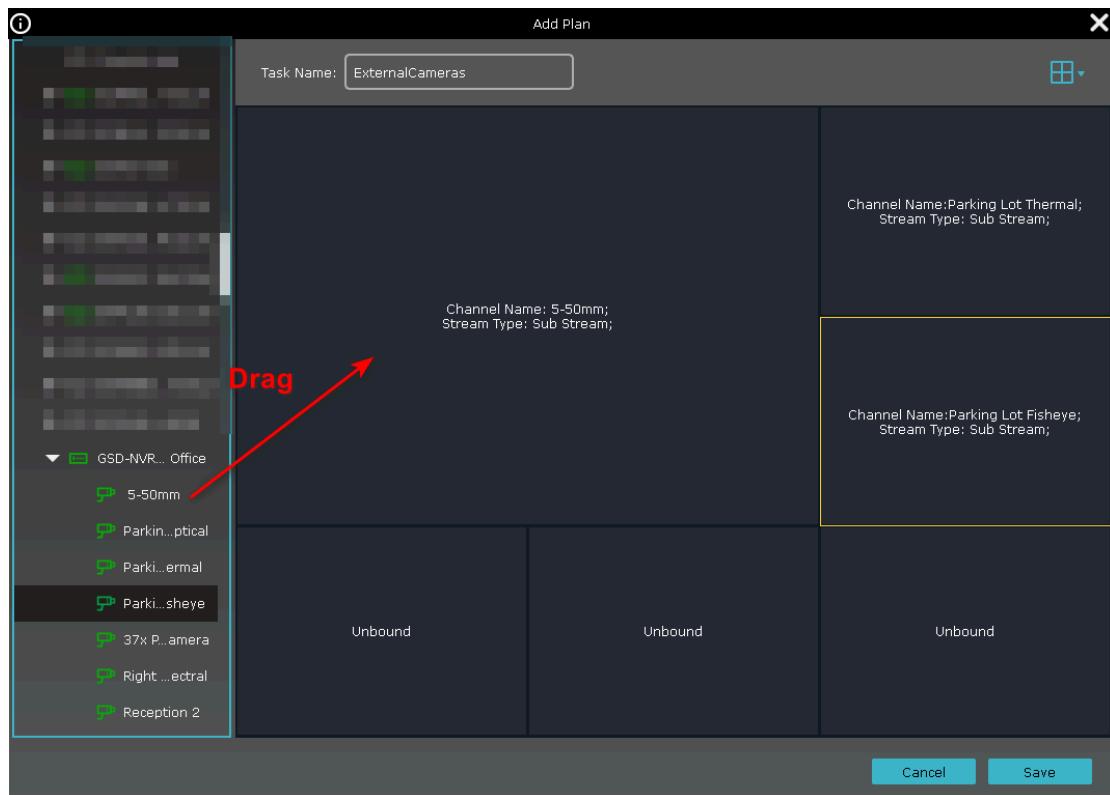

Click  in the upper right corner to select the split views you need. In the left device tree, select and drag a channel to the **Unbound** view area, which subsequently changes to  Channel Name: Camera11; Stream Type: Sub Stream;, indicating a binding success. Right-click to select

Unbind to cancel the binding relationship.

Unbind All to cancel all binding relationships.

Set Main Stream to set the channel to main stream.

Set sub Stream to set the channel to substeam.

Set mobile Stream to set the channel to mobile stream.

Customize a name in and click  to save the view tab.

3. Modify or delete a view tab:

On the view tab contents, select **Alter** to modify a view tab or group.

On the view tab contents, select **delete** to delete a view tab or group.


4. Switch the view tab preview:



After you add multiple view tabs, double-click a view tab to switch the preview quickly.


5.4 PTZ Control

1. PTZ page:

On the preview page, click  to go to the PTZ control plane. The functions supported by PTZ depend on the device.

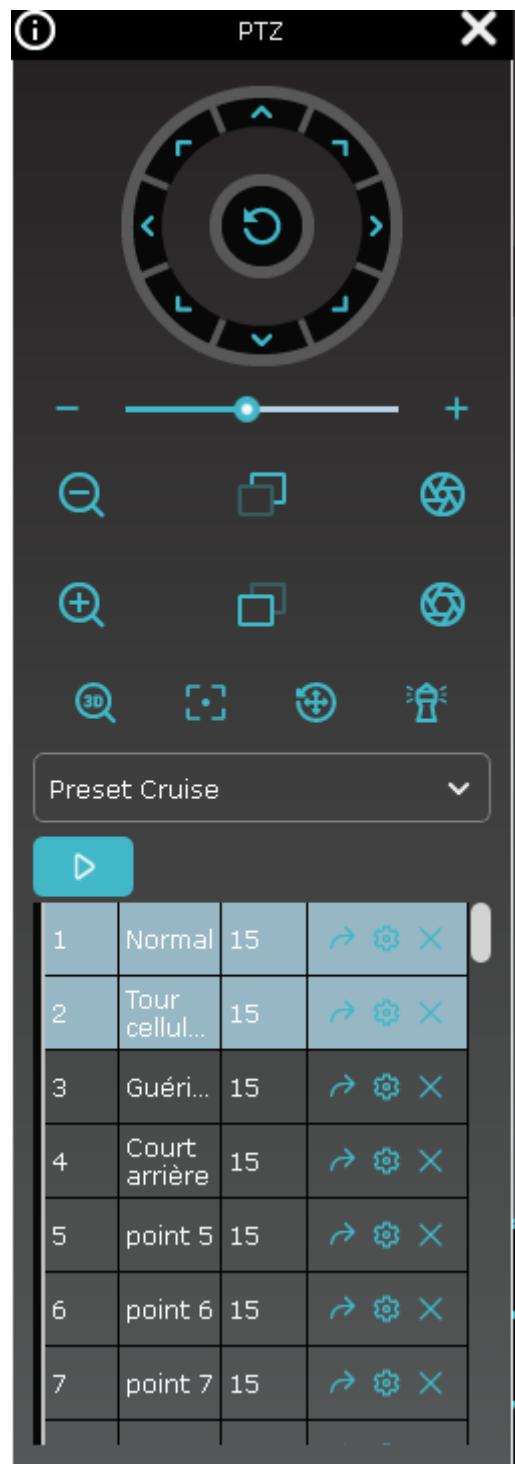


No.	Item	Description
1	PTZ control plane	 <p>Select a PTZ window and click one of the directions to adjust the viewing angle.</p>  <p>Select a PTZ window, and click  to enable auto scans. Click the icon again to stop auto scans.</p>
2	Adjust the zoom, focus, and iris.	 <p>Adjust the zoom and focus speed.</p>  <p>Adjust the zoom, focus, and iris.</p>
3	Auto focus	AutoFocus: auto focus; Refresh: refresh an operation; default: restore default values.
4	Cruise	  <p>Click  to add a position, click  to delete a position, and click</p>

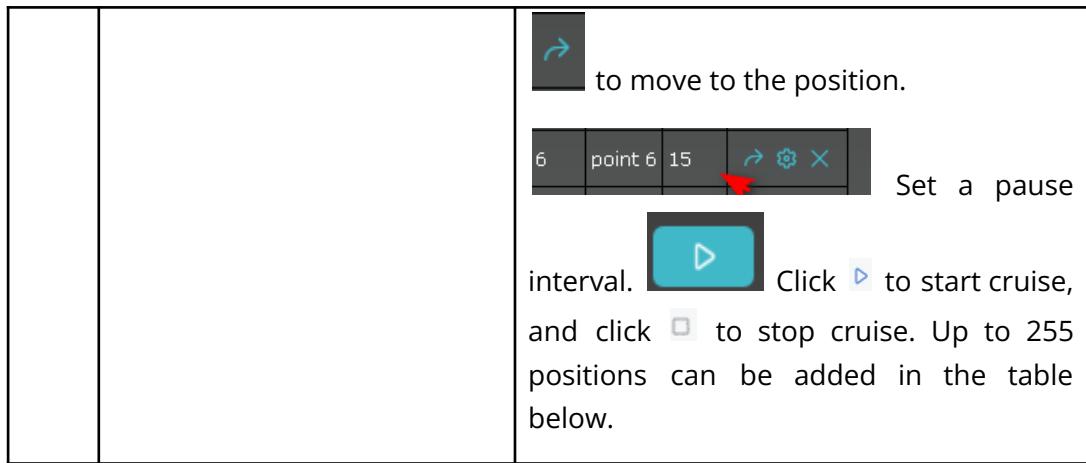

5.5 Sidebar AI Alarm Images


Click the intelligent alarm display button . Then alarm notifications from smart devices are displayed on the right side of the page.

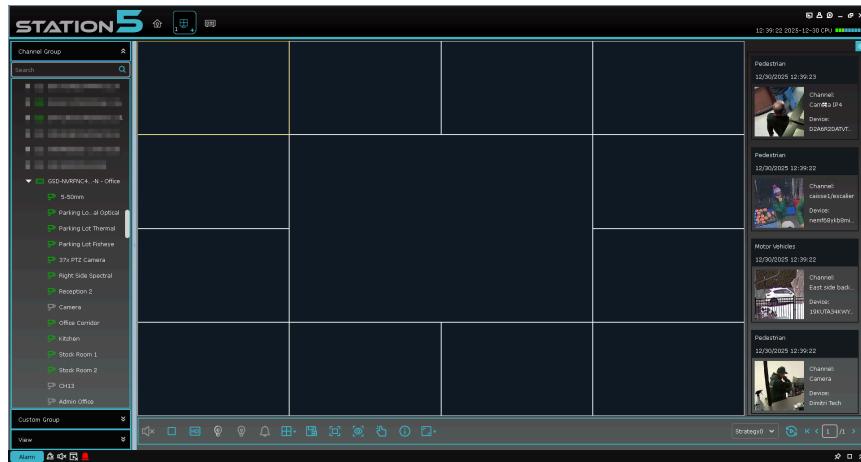

Select an alarm event from the alarm notifications. Right-click to view the event information or play back the related recording.

Playback: Open the playback window to play back the recording.

Detail Information: See the following figure:

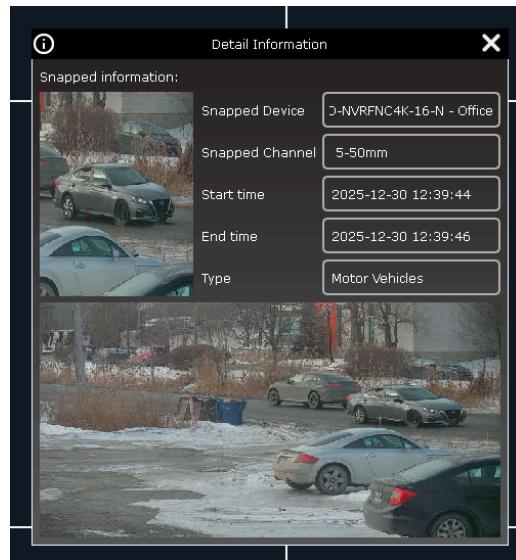

Snapped Device: the capture device

Snapped Channel: the capture channel

Start time: the alarm start time

End time: the alarm end time

Type: the alarm type


Face capture shows additional information about a person. If "unmatched" is shown on a captured image, no comparison images exist. The additional information includes gender, age, expression, and whether the person wears a face mask and

Gender	Female
Age	23
Glasses	Exist
Mask	Exist
Expression	Expressionless

glasses.

Right-click the image to add it to a face group if necessary.

When a comparison image exists in the face group, the following figure appears:

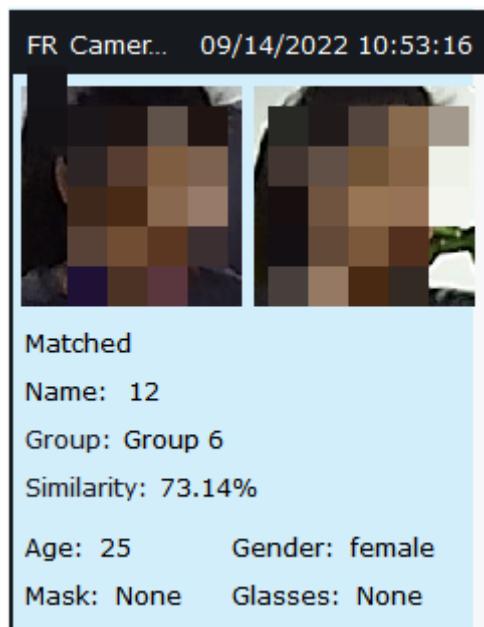

Group and **Similarity** are shown.

Right-click the image to modify the face group information if necessary.


Chapter 6 Cruise Settings

Realize the cruise of windows by configuring a cruise plan.

6.1 Configuring Cruise Plans


Step 1: From the main menu, choose **Cruise Setting** to go to the cruise settings page, as shown in the following figure.

The system creates a cruise plan named **Strategy0** by default. To change the name, click . Click  to delete the plan.

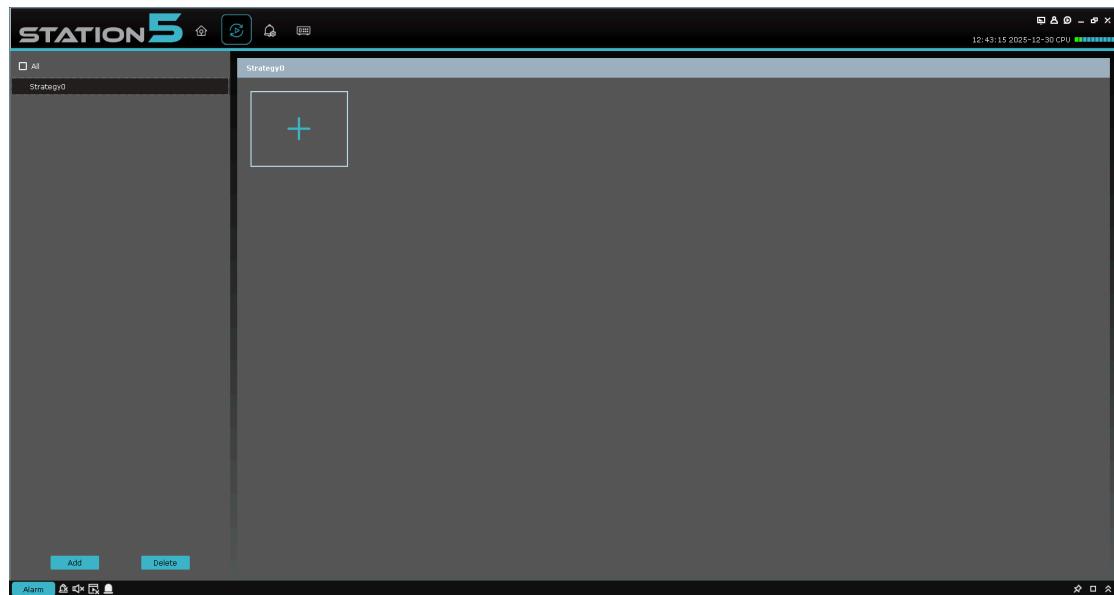


Step 2: Configure a task. You can configure multiple tasks.


- (1) Click . The **Add Task** page is displayed, as shown in the following figure.
- (2) Set **Task Name** and **Task Time**, and select the number of cruise windows in  based on the actual situation.

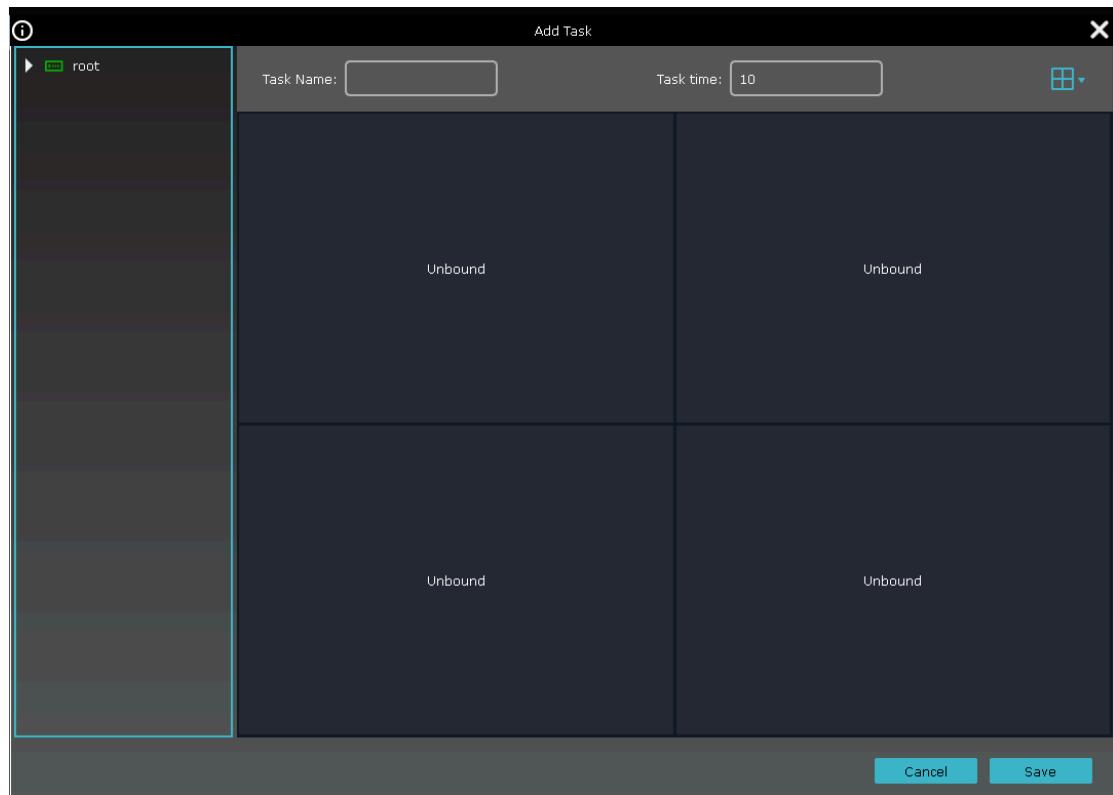

(3) Drag device channels to the video window in a desired order. After the channels are bound, the following figure is shown:

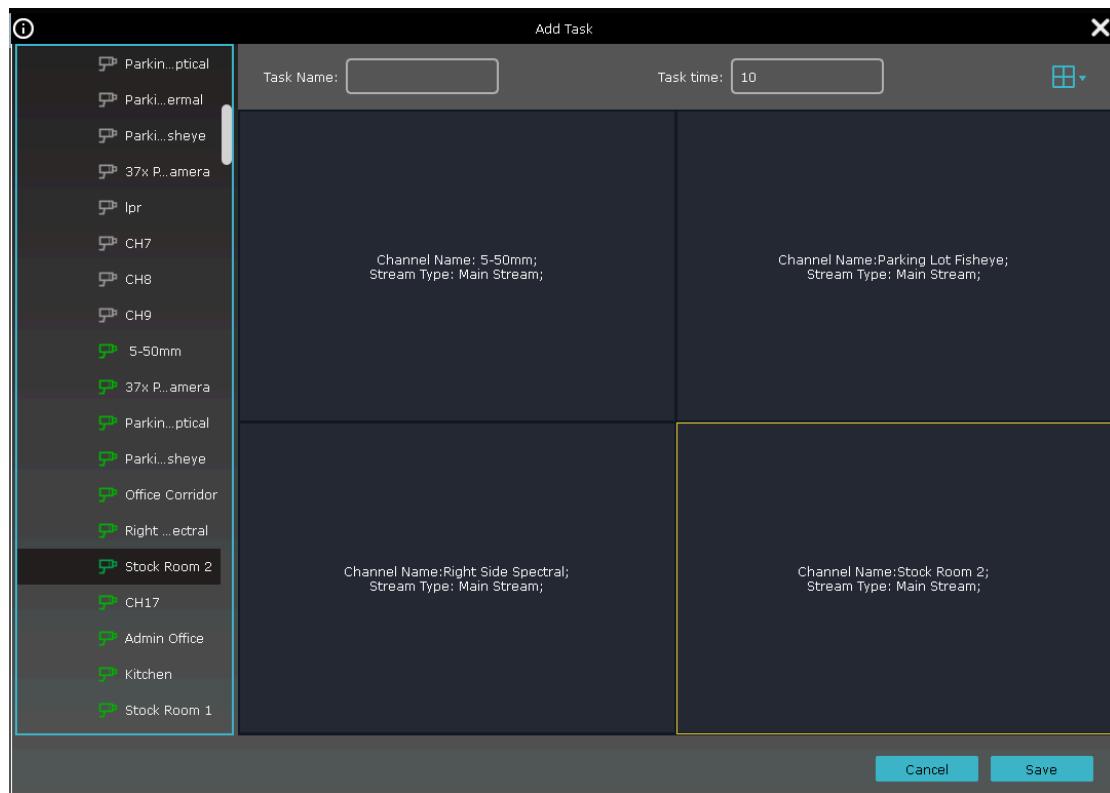

(4) Click **Save** to complete cruise plan settings, as shown in the following figure:

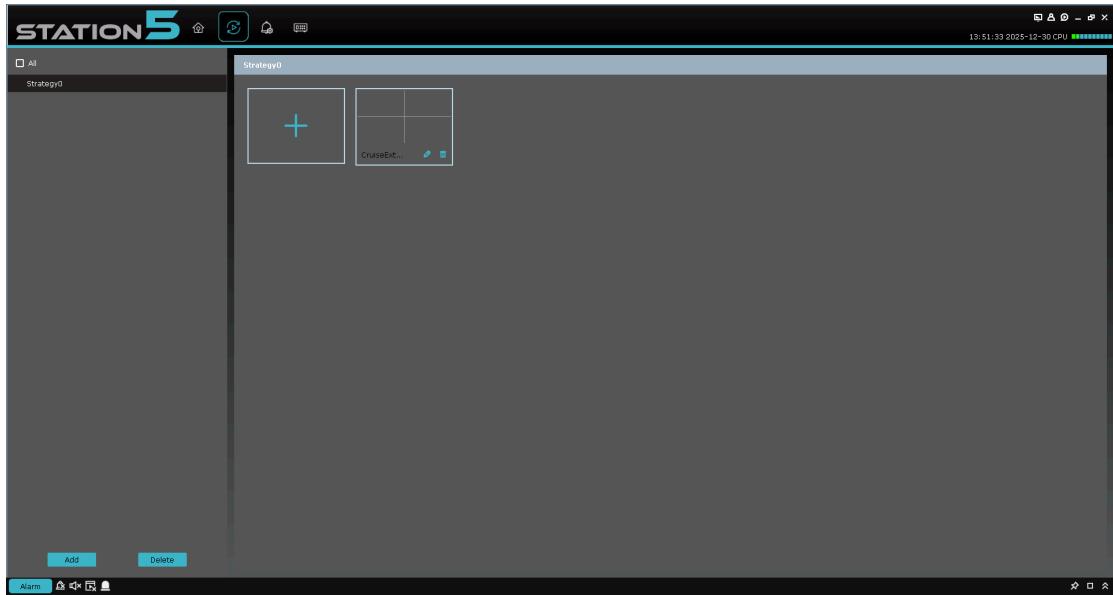

6.2 Starting Cruise

Step 1: From the main menu, choose **Main Window** to go to the preview page.


Step 2: Select a cruise plan such as **Strategy0** in the lower part of the page.

Step 3: Click  to start the cruise plan.

Chapter 7 Remote Playback

7.1 Remote Playback Introduction

From the main menu, Choose **Remote Playback** to go to the playback page, where you can play and export device recordings and images, as shown in the following figure:

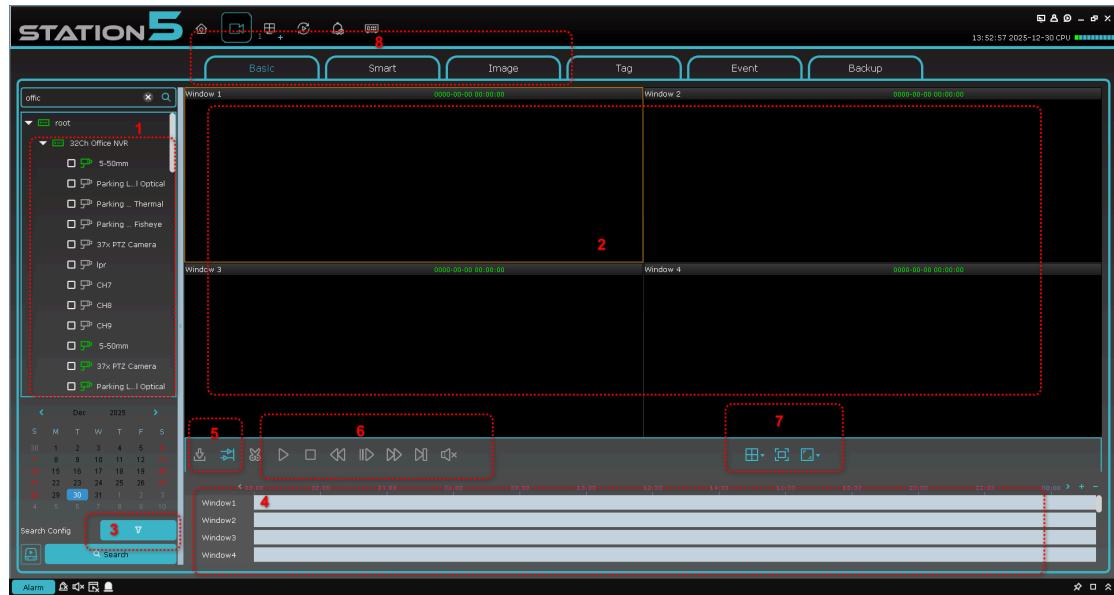


The functions on the page are described in the following table:

No.	Function	Description	Operation
1	Playback window	The area where a recording is played back.	Capture Select a video window that has enabled recording, and click  or right-click to capture an image.
			Digital zoom Select a video window that has enabled recording, and click  .
			Stop playing Select a video window that has enabled playback, and click  or right-click to select 
			Recording Select a video window that has enabled playback, and click  or right-click to select 
			Enable fisheye Select a video window that has enabled playback, and click  or right-click to select   Fisheye. Only available for devices that support the fisheye mode.
			Full screen mode Click  or right-click to select 
			Add a tag Click   to add a tag in

				playback.
		Screenshot		Click  to take a screenshot. To be specific, click and hold the left mouse button, and drag to select a part of the play area.
2	Query time	<p>The time when a recording or image is recorded.</p> <p>Set query conditions for device recordings.</p>	<p>Set query conditions for device images.</p>	<p>On the Devices tab, after you select a device or view, select recording or image query, and select a date. If recordings exist on that day, you can find a subscript in the lower right corner of the date. Then from , set the capture type, stream type, start time and end time, and whether to play synchronously. After that, click Search.</p> <ul style="list-style-type: none"> • The capture type includes all capture, normal capture, I/O detection capture, motion detection capture, alarm capture, intelligent capture, passerby detection capture, and manual capture. • The stream includes main stream and substream. • The interval between start time and end time must be within one day.

3	Time progress area	View the existing recording information.	<p>: The accuracy of play progress bar becomes higher. : The accuracy of play progress bar becomes lower.</p> <p>: Move the progress bar to display the area.</p>
4	Download, sync play, and cut	Play back, cut, or export recordings as needed.	Export device recordings. See Section 7.3 "Exporting Device Recordings".
			Cut device recordings. Drag the start point and end point in the progress bar to cut a recording.
			Synchronous playback. Select multiple channels, click the sync play button, and click play. Recordings of all channels can be played synchronously.
5	Playback control bar	Control the recording playback and sound.	 Play recordings of all channels.
			 Stop playing back recordings of all channels.
			 Start playing back a recording.
			 Move recording playback backward.
			 Pause recording playback.
			 Stop playing back a recording.

				Move a frame forward when playing back a recording.
				Fast forward the playback of a recording.
				Enable or disable the sound.
				Use intelligent playback.
				Enter fisheye mode to play.
				Slow down the playback of a recording.
6	Window control	Set the video window display mode.		Select the desired display mode and the number of video windows.
				Select the full screen mode for a video window.
7		Switch playback between recordings and images.		Go to the recording playback page.
				Go to the image playback page, see Section 7.4 "Playing Back Device Images".
				Go to the playback by tag page.

7.2 Playing Back Device Recordings

Prerequisites:

The selected device channel has a recording.

Procedure:

Step 1: Select  the tab on the **Remote Playback** page.


Step 2: Select a device channel in device groups.

Step 3: Set the query conditions for recordings.

1. Select the recording type, stream type, and data and time.

2. Click **Search**. Then the recording progress bar is shown in the time progress area.

Step 4: Select a window with a recording, and click . Then the recording starts playing back, as shown in the following figure:

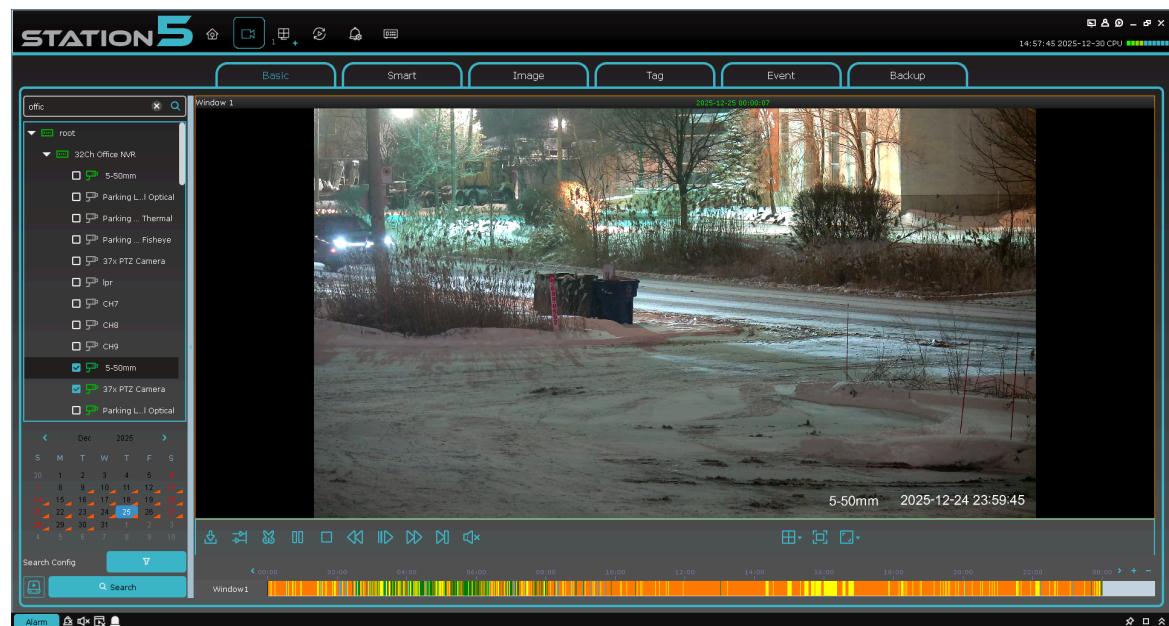

7.3 Export device recordings.

Prerequisites:

The selected device channel has a recording.

1. Cut and download a recording:

Step 1: Select  the tab on the **Remote Playback** page.

Step 2: Select a device channel in device groups.

Step 3: Set the query conditions for recordings.

1. Select the recording type, stream type, and data and time.

2. Click **Search**. Then the recording progress bar is shown in the time progress area.

Step 4: Select a window with a recording, and click . Then the recording starts playing back.

Step 5: Click  and cut a part of the recording in the progress bar as needed, and click  to export the cut recording. A dialog box is displayed, as shown in the following figure:

Download record file

5-50mm

<input type="checkbox"/> Index	Start time	End time	Size	Status	<input type="checkbox"/>
<input type="checkbox"/> 1	2025-12-25 00:00:01	2025-12-25 00:01:43	26.73M	No download	
<input type="checkbox"/> 2	2025-12-25 00:01:43	2025-12-25 00:02:42	15.70M	No download	
<input type="checkbox"/> 3	2025-12-25 00:02:42	2025-12-25 00:03:30	13.86M	No download	
<input type="checkbox"/> 4	2025-12-25 00:03:30	2025-12-25 00:04:55	24.60M	No download	
<input type="checkbox"/> 5	2025-12-25 00:04:55	2025-12-25 00:05:07	3.62M	No download	
<input type="checkbox"/> 6	2025-12-25 00:05:06	2025-12-25 00:07:04	33.33M	No download	
<input type="checkbox"/> 7	2025-12-25 00:07:04	2025-12-25 00:07:42	11.04M	No download	
	2025-12-25	2025-12-25			

Select size: 0M


Disk Free size: 760G

rf AVI Mp4

Merge Video

Download directory:

Step 6: Specify the export path. Click **download**. Then the export progress appears.

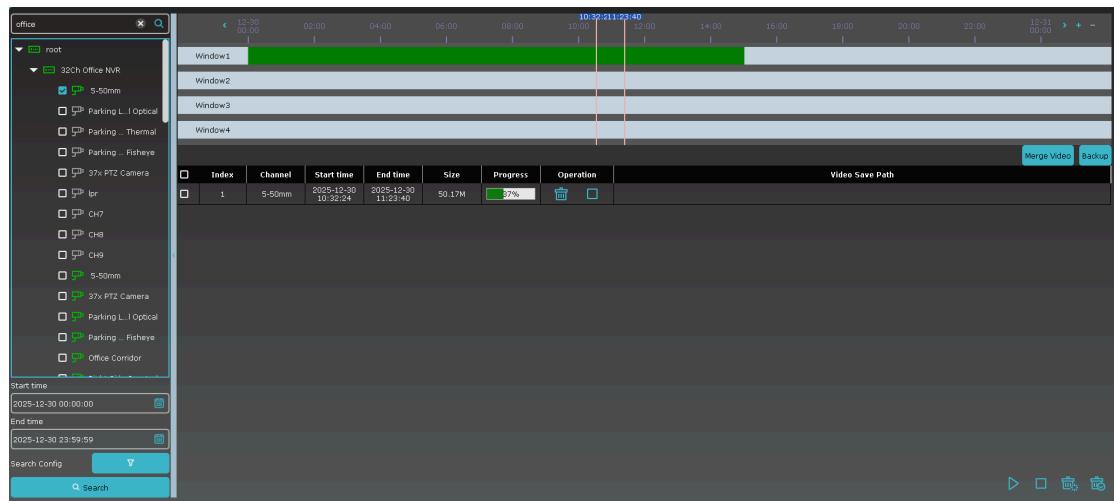

Step 7: After the cut recording is exported, close the window.

2. Download by recording file time:


Step 1: Select the tab on the **Remote Playback** page.

Step 2: Select a device channel in device groups.

Step 3: Set the query conditions for recordings.

1. Select the recording type, stream type, and data and time.
2. Click **Search**. Then the recording progress bar is shown in the time progress area.

Step 4: Click a window with a recording, and click  in the playback control tool bar. Then all recordings of the channel on that day are displayed, as shown in the following figure:

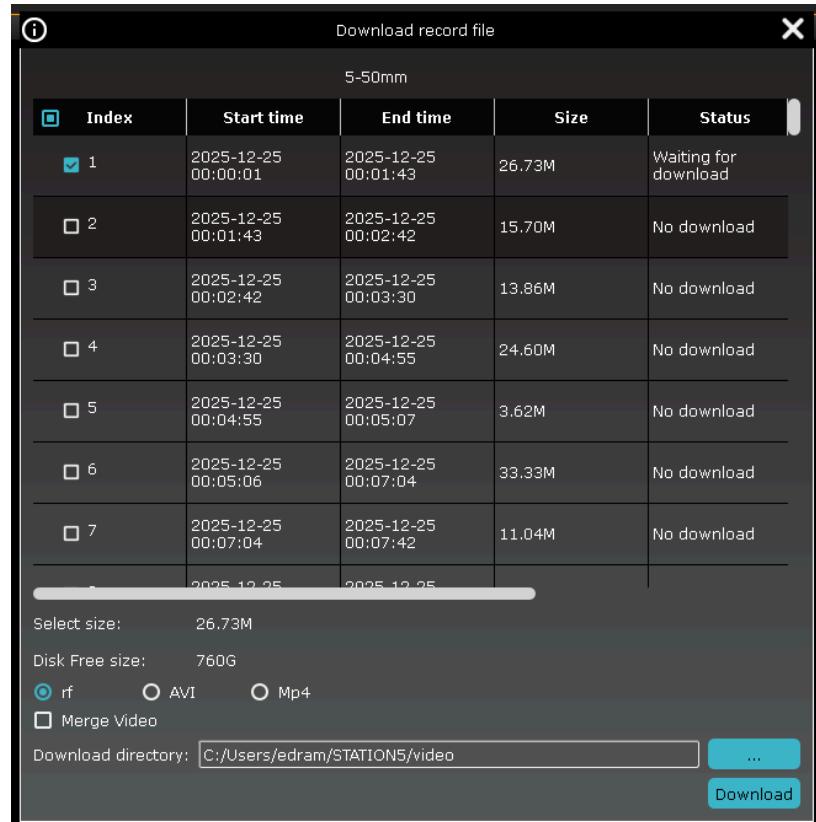

Step 5: Select recordings as needed by time period and specify the export path. Click **download**. Then the export progress appears, as shown in:

7.4 Playing Back Device Images

Prerequisites:


The selected device channel has a recording.


Procedure:



Step 1: Select  the tab on the **Remote Playback** page.

Step 2: Select a device channel in device groups.



Step 3: Set the query conditions for images in .

1. Select the recording type, stream type, and data and time.
2. Click **Search**. The images are displayed on the right next to device groups, as shown in the following figure:



Step 4: Play back the images.

Click to  switch pages.

7.5 Exporting Device Images


On the image playback page, click  in the lower right corner of an image. After the image is exported, a dialog box is displayed, as shown in the following figure:

Also, you can select the checkbox in the upper right corner of an image.


Or, click **Select All** to select all images and click  to save the images in batches.

Note: To set the image storage path, choose **System Config** on the main menu.

7.6 Playing Back Recordings Using Intelligent Search

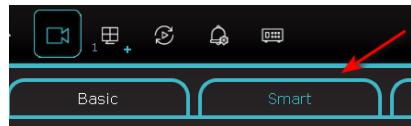

Stop playing a recording, and click  on the playback page to enter intelligent search. Only recordings of one channel can be played back if you use intelligent search. The time periods with recordings are marked blue in the timeline.

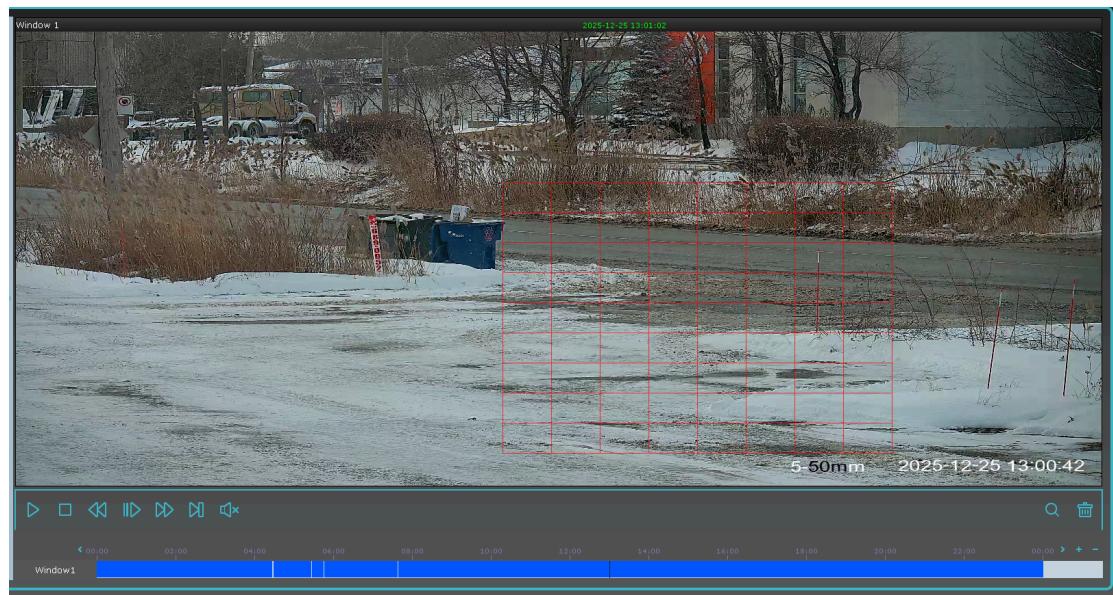

During playback, click the window and drag to select an area that needs search. Click  for intelligent playback in the selected area.

Click  to delete the area and click

7.7 Playing Back Recordings Using Tags

Prerequisites:

A tag was added during preview or playback.

Procedure:

 **Step 1:** Select  the tab on the **Remote Playback** page.


Step 2: Select a device channel in device groups.

Step 3: Select the time period, enter keywords, and click **Search**. All available tags are searched if you do not enter keywords.



The search results are displayed on the right, with each indicating a tag. The tags are shown in the form of a table.

Click  to go to the playback page.

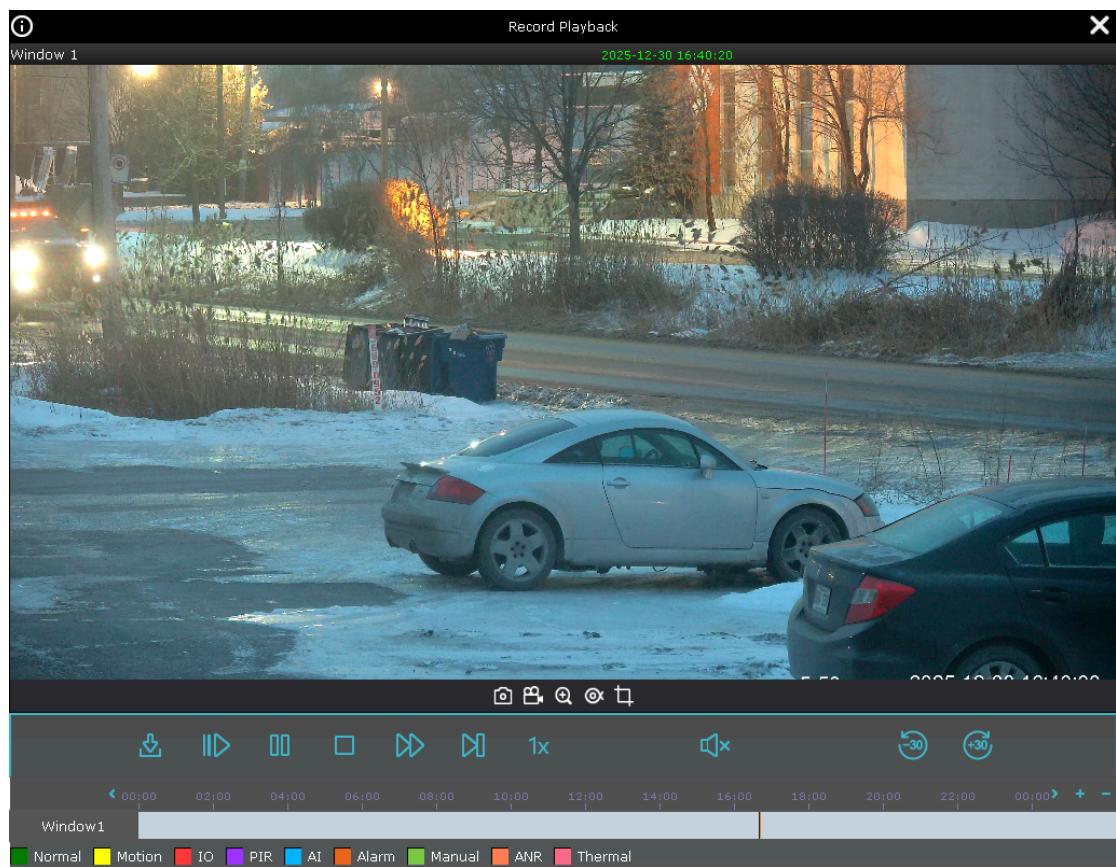

Click to modify the tag name. Click to delete the tag.

Chapter 8 Fisheye View Mode

Only fisheye devices support setting the installation mode and view mode. The view modes and installation modes are described in the following table:

Parameter	Description	
View mode	<p>The display mode of the current video. The original image mode is supported by default. The display mode depends on the installation mode, as shown below:</p> <ol style="list-style-type: none">1. Ceiling mounting VR, cylinder, 1P, 1P+1, 1P+3, 1P+6, 1P+8, 1+3, 1+8, 2, 2P, 4.2. Wall mounting VR, 1P, 1P+3, 1P+8, 1+3, 1+8, 4.3. Ground mounting VR, cylinder, 1P, 1P+1, 1P+3, 1P+6, 1P+8, 1+3, 1+8, 2P, 4.	
Ceiling/ Wall/ Ground mounting		Original image The original image that is not warped.
Ceiling mounting		Two independent sub-images that support zoom and movement.
Ceiling/ Ground mounting		VR mode. Double-click to enter VR mode. Images support zoom and movement.
		Cylinder display mode. Drag the mouse up and down to switch the cylinder display mode to plane display.
		Four independent sub-images that support zoom and movement.
		Two related 180° expanded rectangular images. The two sub-windows form a 360° panorama anytime, also known as dual panorama. Both rectangular expanded images support moving the starting point leftward and

		rightward in an interconnected way.
	 : 1P	360° expanded rectangular panorama that supports zoom and movement.
	 : 1P+1	360° expanded rectangular panorama +1 independent sub-image. The sub-image and sub-frame in the expanded panorama support zoom and movement. The expanded rectangular panorama does not support zoom and movement.
	 : 1P+3	360° expanded rectangular panorama +3 independent sub-images. The sub-image and sub-frame in the expanded panorama support zoom and movement. The expanded rectangular panorama does not support zoom and movement.
	 : 1P+6	360° expanded rectangular panorama +6 independent sub-images. The sub-image and sub-frame in the expanded panorama support zoom and movement. The expanded rectangular panorama does not support zoom and movement.
	 : 1P+8	360° expanded rectangular panorama +8 independent sub-images. The sub-image and sub-frame in the expanded panorama support zoom and movement. The expanded rectangular panorama does not support zoom and movement.
Parameter	Description	
Ceiling/ Ground mounting	 : 1+3	Original image +3 independent images. The sub-image and sub-frame in the original image support zoom and movement. The original image supports zoom.
	 : 1+8	Original image +8 independent images. The sub-image and sub-frame in the original image support zoom and movement. The original image supports zoom.
Wall mounting	 : VR	VR mode. Double-click to enter VR mode. Images support zoom and movement.
	 : 1P	360° expanded rectangular panorama from left to right that changes the vertical viewing angle. Zoom

		and movement are not supported.
	 : 4	Four independent sub-images that support zoom and movement.
	 : 1P+3	360° expanded rectangular panorama + 3 independent sub-images. The sub-image and sub-frame in the expanded panorama support zoom and movement. The expanded rectangular panorama that changes the vertical viewing angle. Zoom and movement are not supported.
	 : 1P+8	360° expanded rectangular panorama + 8 independent sub-images. The sub-image and sub-frame in the expanded panorama support zoom and movement. The expanded rectangular panorama that changes the vertical viewing angle. Zoom and movement are not supported.
	 : 1+3	Original image + 3 independent images. The sub-image and sub-frame in the original image support zoom and movement. The original image supports zoom and movement.
	 : 1+8	Original image + 8 independent images. The sub-image and sub-frame in the original image support zoom and movement. The original image supports zoom and movement.

9.1 Entering Fisheye Mode in Live View

Step 1: In the preview window, click  or right-click to select to enter fisheye mode, as shown in the following figure:



The functions are described in the following table:

No.	Parameter	Description
1	Fisheye installation mode	Switch the fisheye installation mode.
2	Fisheye View Mode	Switch the fisheye view mode.
3	Live view	View the fisheye live view.

Step 2: Set the fisheye installation mode and view mode. Then you can control fisheye devices through PTZ.

9.2 Entering Fisheye Mode During Recording Playback

Click  in the playback window to enter fisheye mode. For detailed operations, see Section 9.1 "Entering Fisheye Mode in Live View".



Chapter 10 Log Query

Query and export logs from the client and devices.

10.1 Querying Client Logs


Step 1: From the main menu, choose **Log Search** to go to the log search page.



Step 2: Select **Log Search**. The local client **Local Log** page is displayed.

Step 3: Select a current or deleted device for search. Set the username, time, log type, and device as needed. Local client logs include alarm, system, and operation logs.

Step 4: Click **Search**. The search results of client logs are displayed, as shown in the following figure:

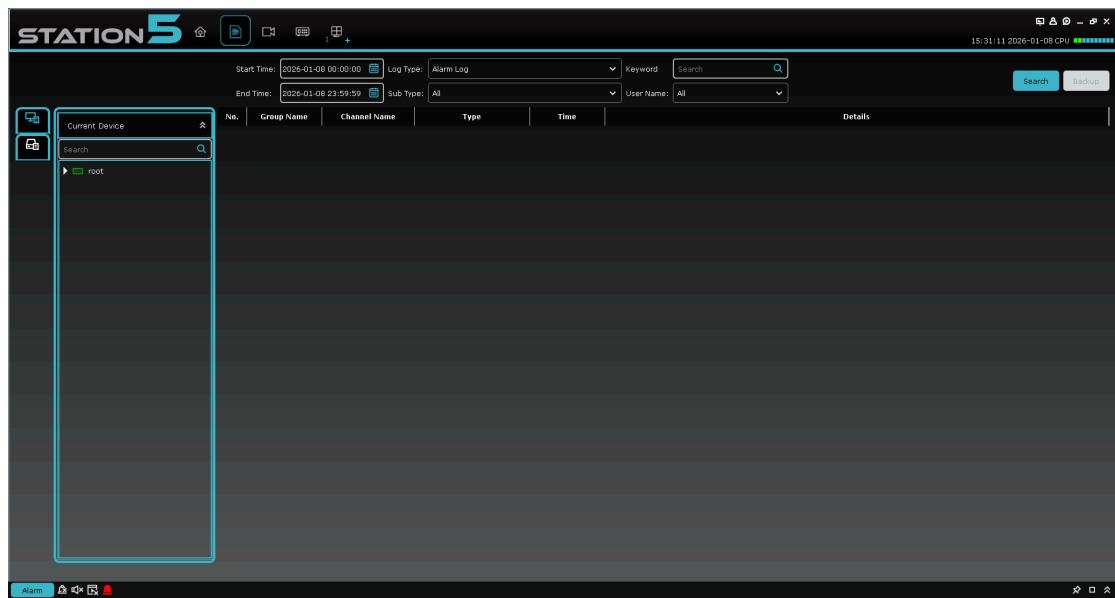

Note: After the query is successful, you can click **Backup** to export the client logs.

10.2 Querying Remote Device Logs

Step 1: From the main menu, choose **Log Search** to go to the log search page.




Step 2: Select . The remote device **Remote Log** page is displayed.

Step 3: Set the time, log type, and device as needed. Remote device logs include system, configuration, alarm, user, record, storage, and intelligent logs.

Step 4: Click **Search**. The search results of device logs are displayed, as shown in the following figure:

Note: After the query is successful, you can click **Backup** to export the device logs.

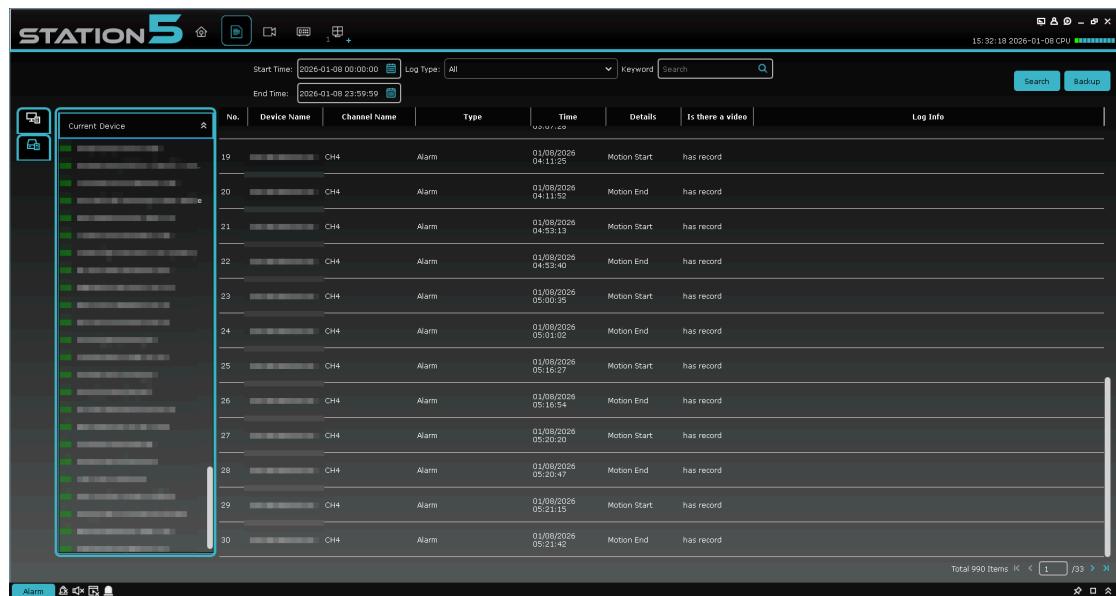

No.	Device Name	Channel Name	Type	Time	Details	Is there a video	Log Info
19	██████████	CH4	Alarm	01/08/2026 04:11:25	Motion Start	has record	
20	██████████	CH4	Alarm	01/08/2026 04:11:52	Motion End	has record	
21	██████████	CH4	Alarm	01/08/2026 04:13:13	Motion Start	has record	
22	██████████	CH4	Alarm	01/08/2026 04:13:40	Motion End	has record	
23	██████████	CH4	Alarm	01/08/2026 05:00:35	Motion Start	has record	
24	██████████	CH4	Alarm	01/08/2026 05:01:02	Motion End	has record	
25	██████████	CH4	Alarm	01/08/2026 05:16:27	Motion Start	has record	
26	██████████	CH4	Alarm	01/08/2026 05:16:54	Motion End	has record	
27	██████████	CH4	Alarm	01/08/2026 05:20:20	Motion Start	has record	
28	██████████	CH4	Alarm	01/08/2026 05:20:47	Motion End	has record	
29	██████████	CH4	Alarm	01/08/2026 05:21:15	Motion Start	has record	
30	██████████	CH4	Alarm	01/08/2026 05:21:42	Motion End	has record	


Chapter 11 Topology Management

Manage intelligent network management PoE switches and display the switches in topology. To use this function, ensure that the switches are added to the client and that their status is online.

On the topology display page, you can view the topological relationships among the devices added to the client. Also, you can perform related configuration operations.

11.1 Related Operations

From the main menu, click **Topology Management** to enter the topology display page.

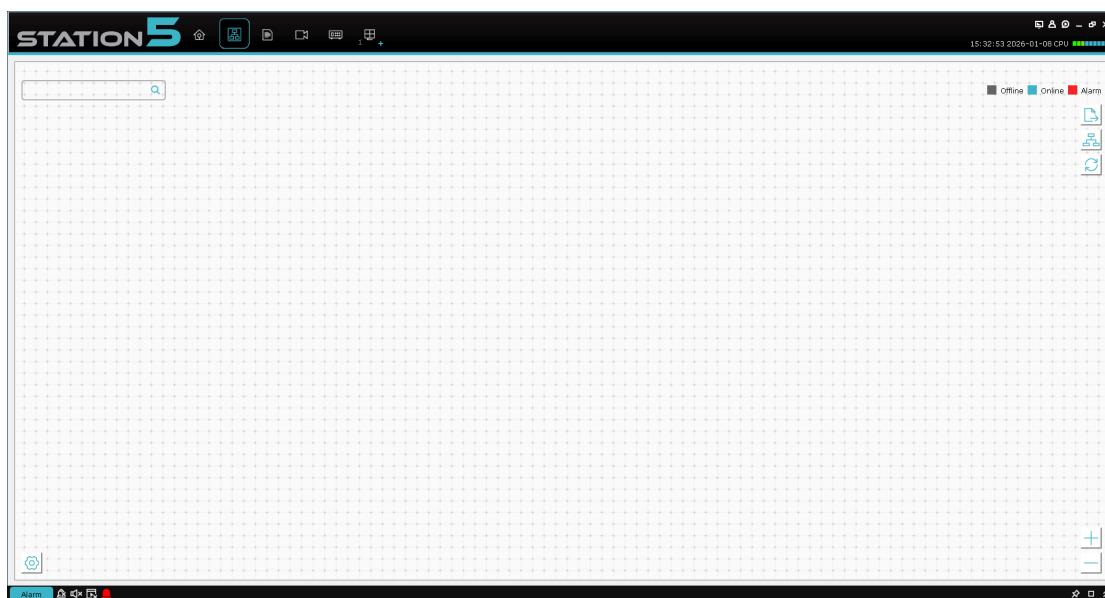

Interface introduction

- In the upper left corner, you can enter a device alias or IP address to view the corresponding topology.
- In the upper right corner, you can find the meaning of icon colors, export or refresh the topology, and view the path.
- In the lower right corner, you can zoom in or out the topology, or use your mouse wheel to zoom in or out.
- In the lower left corner, you can set the topology layer.

Note:

When you enter the topology page for the first time and the topology is not shown, click to refresh the page.

Description of related operations and icons

Action/Icon	Operation	Description
Double-click a device.	View the detailed device information.	View the device type, IP address, panel status, and port information.
Right-click a device.	View the device status.	For more information, go to the Device Status page.
	Handle alarms.	View alarms and events, and clear alarms.
	Perform remote configuration.	For more information, go to the Remote Config page.
	Modify the device name.	Modify the device name that is shown in the topology.
	Set as root node.	Set the device as root node in the topology.
	Upgrade devices.	Upgrade the NVRs, DVRs, and IP cameras connected to the switches in the Station 5 system.
	Export the topology.	Select a path to export the current topology.
	View the path.	Select the IP camera and current device to view the path.
	Refresh the topology.	Refresh the topology page.

11.2 Topology Settings

Procedure:

Click  in the lower left corner of the page for simple topology configuration.

- Set the topology layers: 1-10;
- Click **OK** to save the settings.



Note:

After you change settings, click  to refresh and view the latest topology.


Chapter 12 AI Search

Intelligent search includes face search, human and vehicle search, and repeat visitor search. The face detection function supports detecting passersby in a specified area, capturing clear face images, recognizing the face features, and recognizing humans and vehicles.

12.1 Face Search

Step 1: From the main menu, choose **AI Search**. Then click **Face Search** to enter the face search page, as shown in the following figure:

Note: The device is required to support face recognition.

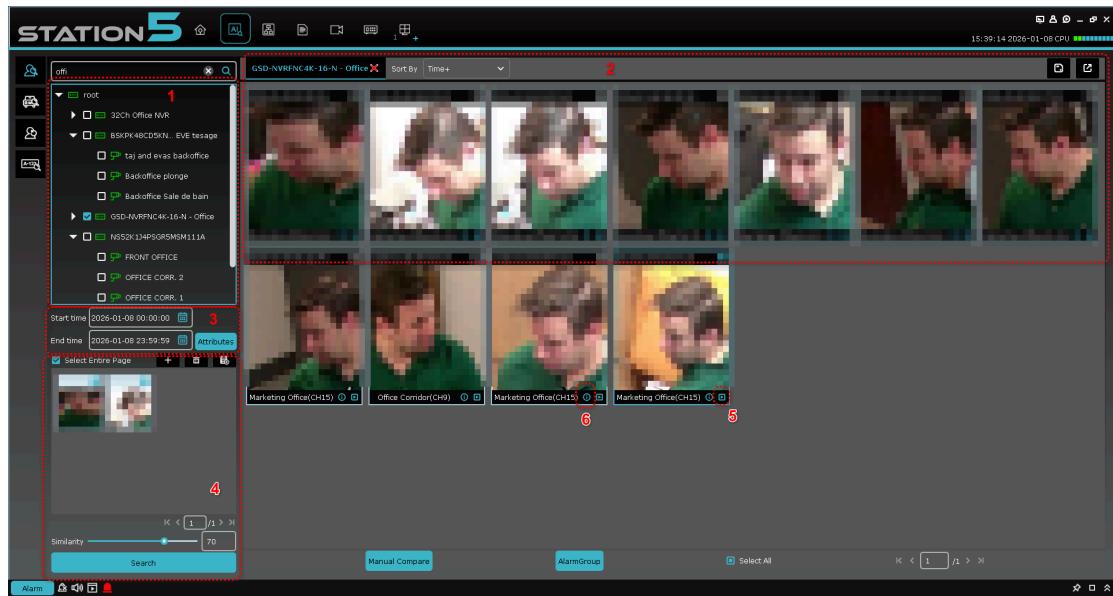


Each part is described in the following table:

No.	Item	Description
1	Device tree	View the listed device channels.
2	Search result display area	View the images that are searched out based on settings.
3	Search setting area	Set the date, group, and attributes for search. The attributes include gender, age, face mask, glasses, and expression.
4	Comparison search area	Click to add a local or device image. to set similarity, and for comparison search.
5	Recording playback area	From the search results, select a recording to play in the playback area.
6	Face information	View the face information from the

		database.
--	--	-----------

12.2 Human and Vehicle Search

On the **AI Search** page, click the human and vehicle search icon to enter the human and vehicle page, as shown in the following figure:

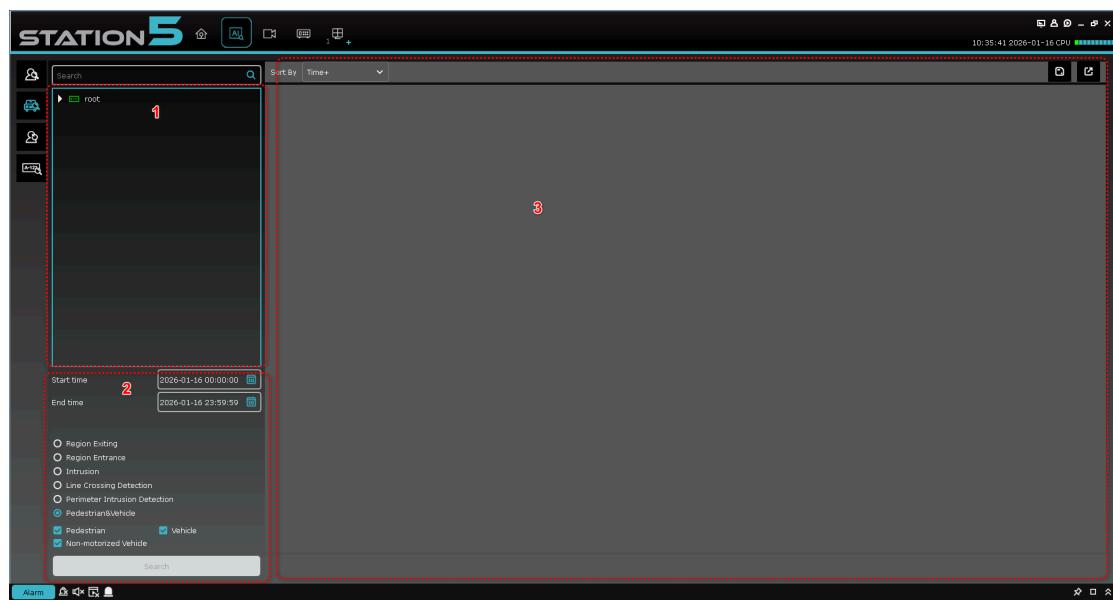

No.	Item	Description
-----	------	-------------

1	Device tree	View the listed device channels.
2	Search setting area	Select the time range, human, vehicle, or non-motorized vehicle, and click Search .
3	Human and vehicle search display area	View the captures that are searched out based on the specified time range.


Step 1: Select a device or device group in the device tree.

Step 2: Select the time range and human or vehicle below the device tree, and click **Search**.

Step 3: The search results are displayed in the form of cards in the display area. Click a card to view the detailed device information below, and play back the recording in the playback area. Click the box in the upper right corner of a card, and export the information.



12.3 Repeat Visitor Search

Step 1: On the **AI Search** page, click the repeat visitors icon to enter the repeat visitors page, as shown in the following figure:

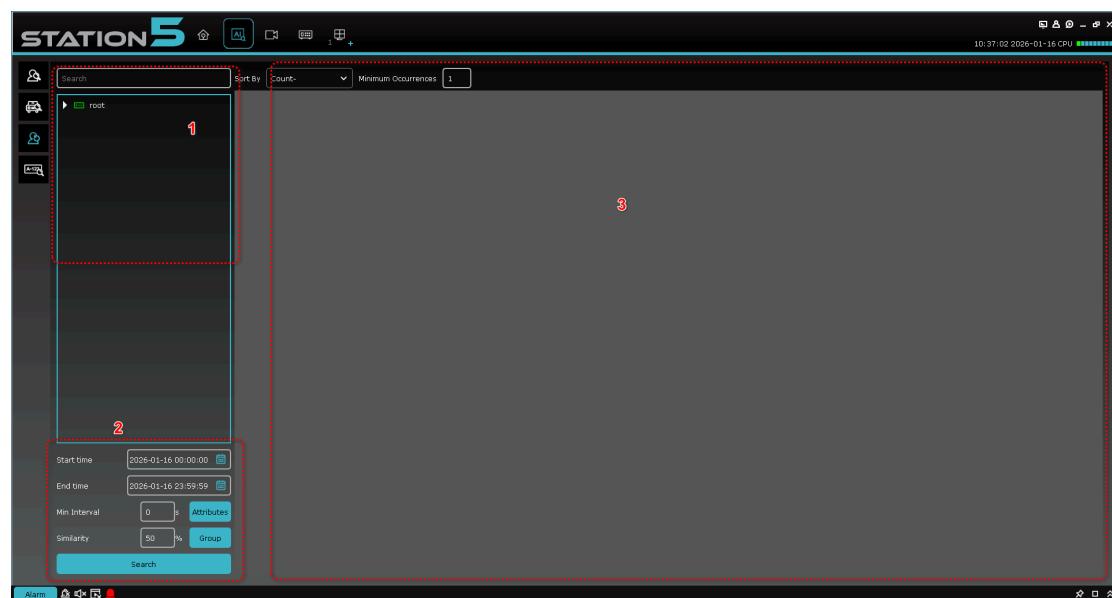


No.	Item	Description
1	Device tree	View the listed device channels.
2	Search setting area	Search for the number of times that a face appears by setting the time period, the minimum interval, and similarity. The attributes and group are used to filter search results.
3	Human search display area	View the profiles of people and the number of times people appear, which are searched out based on the specified time range.

Step 2: Select a device or device group, set the time, minimum interval, and similarity. To query a person, select the group the person belongs to in . Select attributes if necessary

Step 3: The query results are displayed in the form of cards in the query display area. A card consists of the upper part, central part, and lower part. The lower part  shows the number of times the person appears. The central part shows the image recorded by the device. The upper part  shows the person name, , and box. The name is first queried in the personnel information stored in the device. If the name does not exist, **Stranger** is displayed. Click  to go to the detailed information page. If the repeat visitor information is stored in the device, the detailed information is displayed, as shown in the following figure:

Details		Edit																																						
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>Snapped Infomation:</p> <table border="1"> <tr><td>Channel</td><td>IPC1</td></tr> <tr><td>Start time</td><td>2021-03-11 11:12:08</td></tr> <tr><td>End time</td><td>2021-03-11 11:12:08</td></tr> <tr><td>Face ID</td><td>18940</td></tr> <tr><td>Score</td><td>8</td></tr> <tr><td>Alarm Policy</td><td>Deny</td></tr> </table>  </div> <div style="width: 45%;"> <p>Matched Information:</p> <table border="1"> <tr><td>Group</td><td>Allow List</td></tr> <tr><td>Name</td><td>lqq</td></tr> <tr><td>Age</td><td>22</td></tr> <tr><td>Sex</td><td>male</td></tr> <tr><td>Country</td><td></td></tr> <tr><td>Nationality</td><td></td></tr> <tr><td>Native Place</td><td></td></tr> <tr><td>Id Code</td><td></td></tr> <tr><td>Occupation</td><td></td></tr> <tr><td>Phone Number</td><td></td></tr> <tr><td>Email</td><td></td></tr> <tr><td>Residence</td><td></td></tr> <tr><td>Remark</td><td></td></tr> </table> <p>Additional Face Image</p> <div style="border: 1px solid #ccc; width: 100%; height: 100px; margin-top: 10px;"></div> </div> </div>			Channel	IPC1	Start time	2021-03-11 11:12:08	End time	2021-03-11 11:12:08	Face ID	18940	Score	8	Alarm Policy	Deny	Group	Allow List	Name	lqq	Age	22	Sex	male	Country		Nationality		Native Place		Id Code		Occupation		Phone Number		Email		Residence		Remark	
Channel	IPC1																																							
Start time	2021-03-11 11:12:08																																							
End time	2021-03-11 11:12:08																																							
Face ID	18940																																							
Score	8																																							
Alarm Policy	Deny																																							
Group	Allow List																																							
Name	lqq																																							
Age	22																																							
Sex	male																																							
Country																																								
Nationality																																								
Native Place																																								
Id Code																																								
Occupation																																								
Phone Number																																								
Email																																								
Residence																																								
Remark																																								

If the person is a stranger, no information is displayed on the page. If you know the person, add the person information to the device or modify the information. Click **Edit** pointed by the arrow, as shown in the following figure:

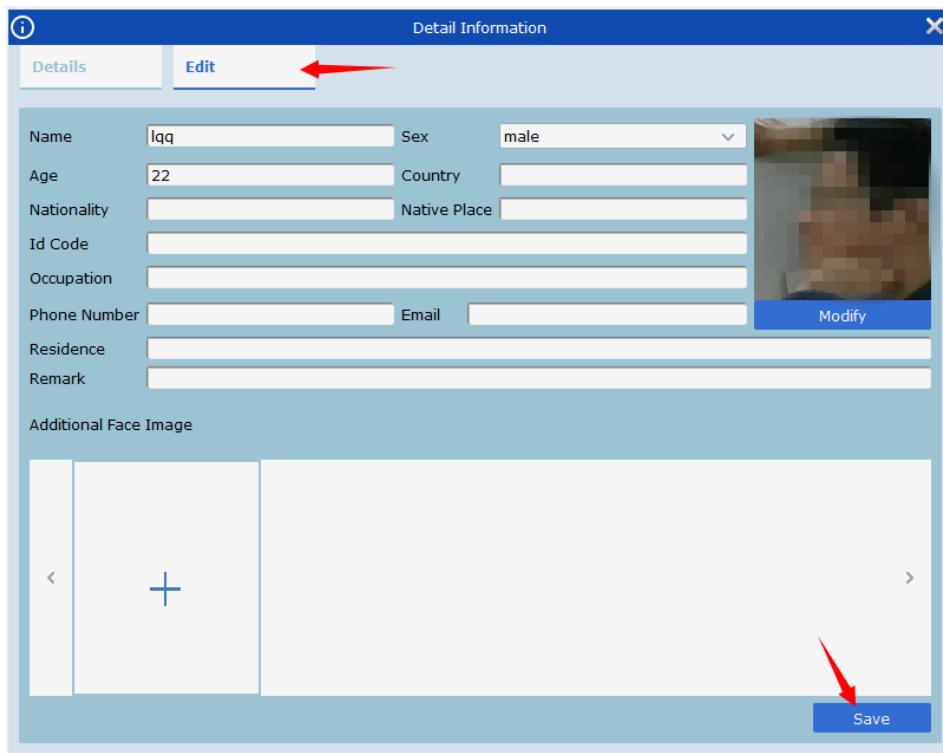

After you enter the information, click **Save** pointed by the arrow in the above figure to save the information to the device.

To export the queried information, select the box in . Or, click **Select All** below the images and click  in the upper right corner.

Step 4: If you click a card, the information bar in the lower part shows the information each time the repeat visitor is captured.


No.	Channel	Start Time	End Time	Playback
1	IPC3	2019-11-22 05:35:05	2019-11-22 05:35:06	
2	IPC3	2019-11-22 05:35:47	2019-11-22 05:35:48	
3	IPC3	2019-11-22 05:35:51	2019-11-22 05:35:52	
4	IPC3	2019-11-22	2019-11-22	

The information bar shows the capture channel, start time and end time, and video playback in the order of capture time. Click  in the **Playback** column if you want to play back the recording in the playback window next to the information bar. For information about playback operations, see Table 6-1.

12.4 License Plate Search

Step 1: On the AI Search page, click the License Plate Search icon to enter the license plate search page, as shown in the following figure:


Note: The device is required to support license plate recognition.

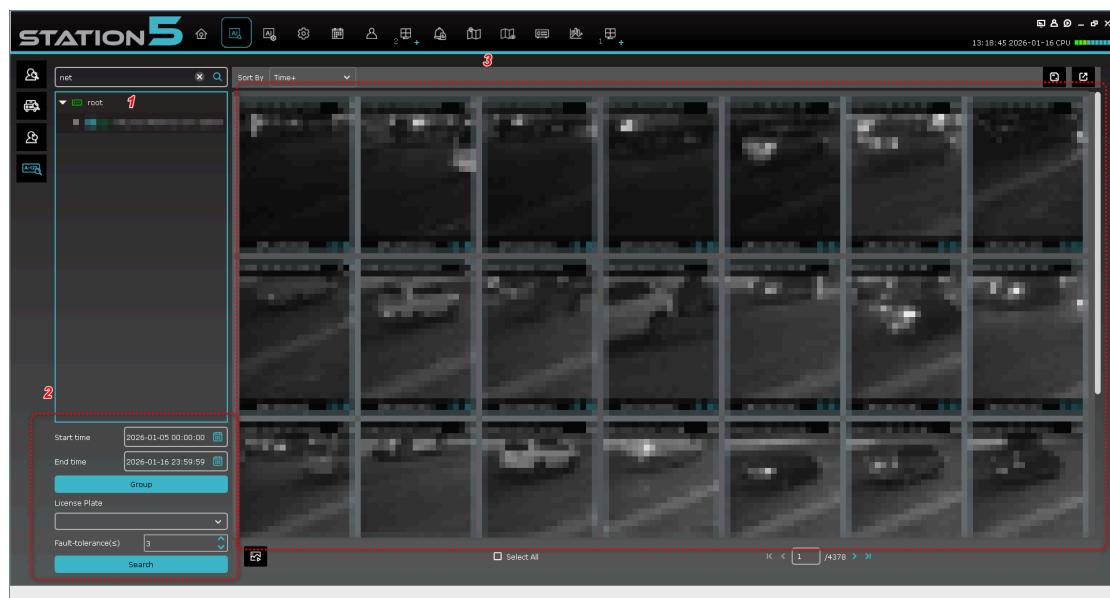

Each part is described in the following table:

No.	Item	Description
1	Device tree	View the devices that support license plate recognition.
2	Search setting area	Set the date, group, license plate, and number of fault-tolerant characters for search.
3	Search result display area	View the license plates that are searched out based on settings.

Step 2: Select the device channel, date, and license plate group, and enter the license plate number you want to search. Then click **Add** to add the plate number to the search list, and click **Search**. The search results are displayed, as shown in the following figure:

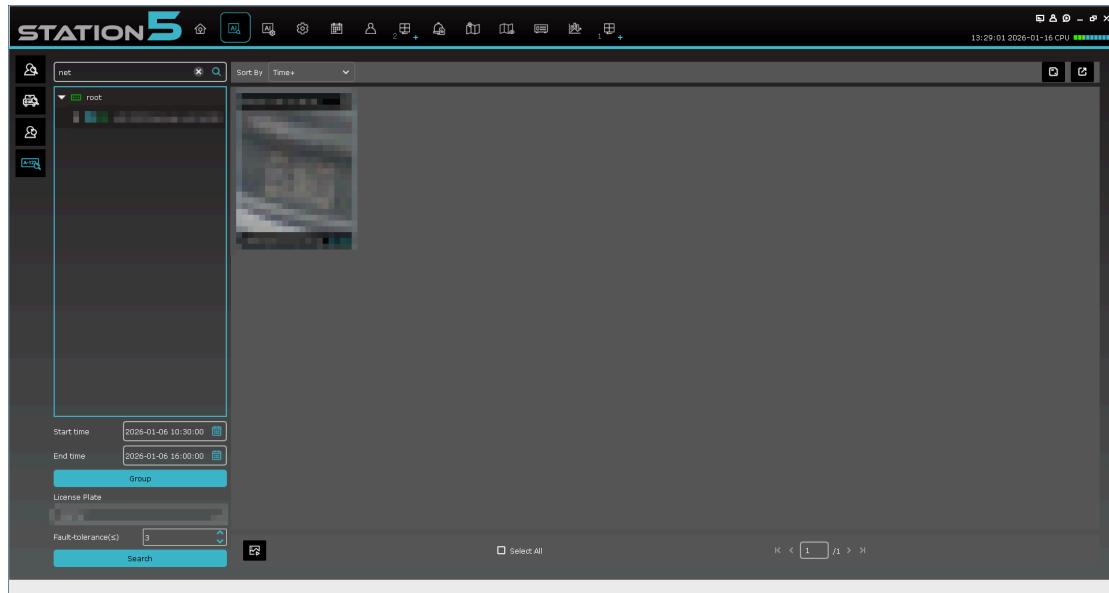


Chapter 13 Data Analysis

From the main menu, click **Data Analysis** to go to the data analysis page. Data analysis involves five modules: face statistics, human and vehicle statistics, cross counting, heat map, and face attendance statistics.

13.1 Face Statistics

On the **Data Analysis** page, the face detection page is displayed by default, as shown in the following figure:

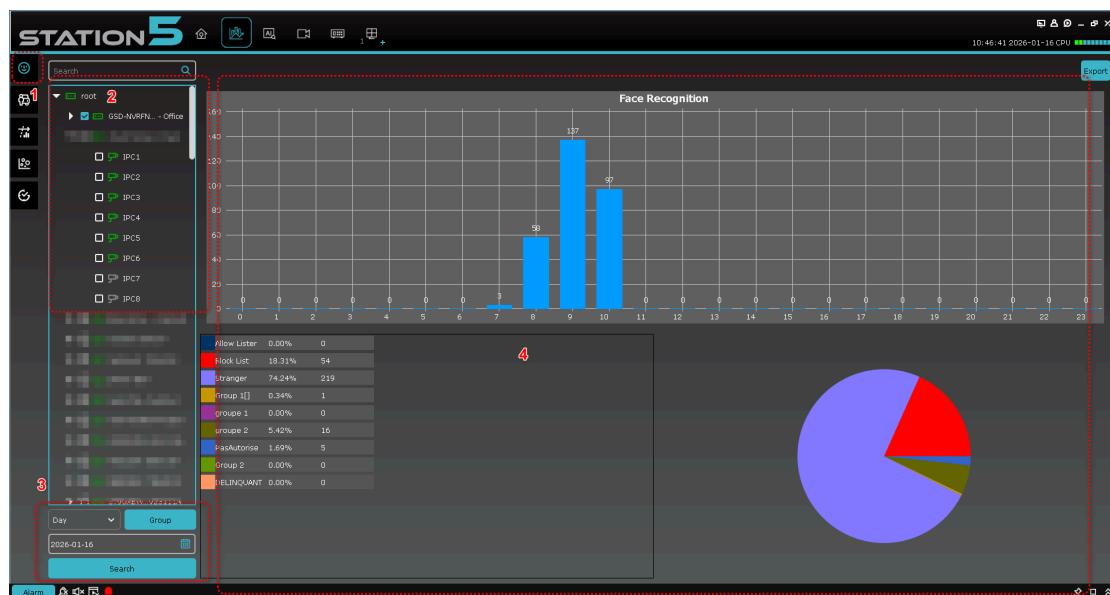


No.	Item	Description
1	Face detection statistics module	Click to enter the face detection statistics page.
2	Device tree	View device channels.
3	Search setting area	Set the date, time range, and group for search.
4	Result display area	A column chart or pie chart shows the search results.

Select a device, set the date, time range, and group, and click **Search**.

The search results are shown by a pie chart or column chart in the display area.

13.2 Human and Vehicle Statistics

On the **Data Analysis** page, click the human and vehicle detection icon to enter the human and vehicle detection statistics page, as shown in the following figure:

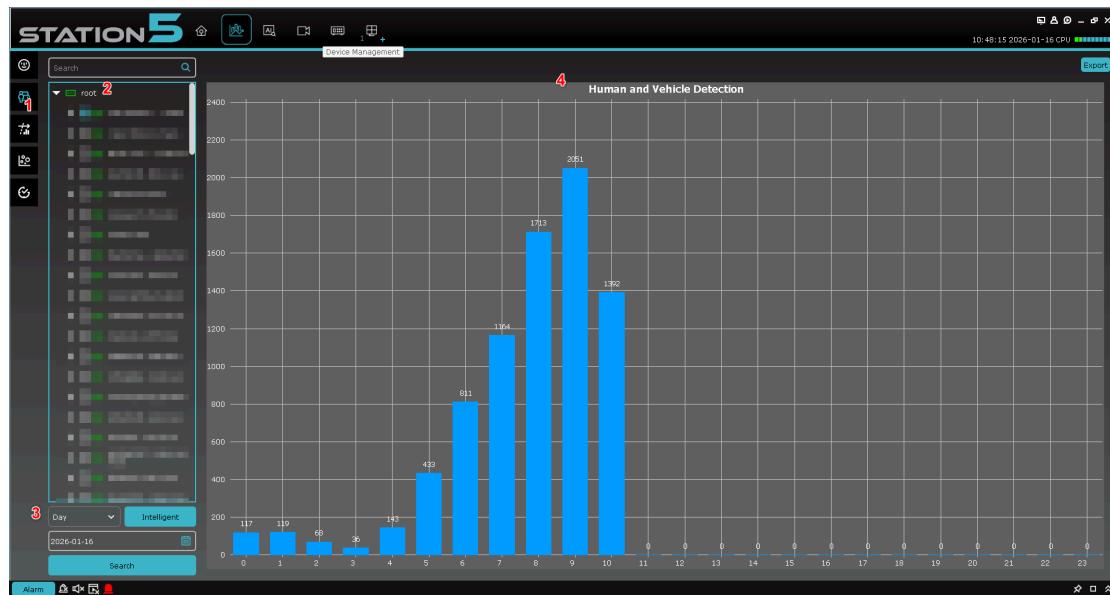


No.	Item	Description
1	Face detection statistics module	Click to enter the human and vehicle detection statistics page.
2	Device tree	View device channels.
3	Search setting area	Set the date, time range, and group for search.
4	Result display area	A column chart or pie chart shows the search results.

Chapter 13 AIScene

From the main menu, choose **AI Scene** to go to the AI scene page.

13.3 Cross Counting

On the **AI scene** page, click  to enter the cross counting scene, as shown in the following figure:

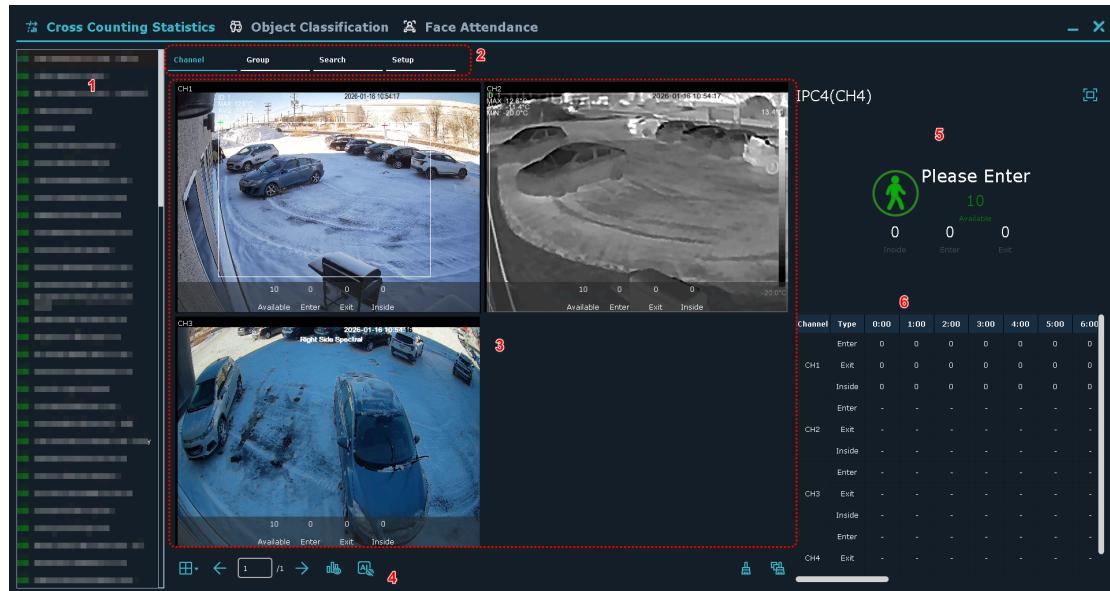


No.	Item	Description
1	Device tree	View and select devices.
2	Tab	Switch among the pages of channel preview, group preview, scene search, and configuration.

3	Preview area	<p>Preview channel scene. During preview, you see the total number of people who are involved in the channel, who enter the channel, who leave the channel, and who stay in the channel respectively. If no channels are available,  is shown in the center of each window. Click the icon to enter the settings page and add channels.</p>
4	Function control area	<p>Click  to switch split views. The options are 1, 4, 6, 8, and 9.    Switch split screen, Click  to go to the previous page, Click  to go to the next page. Or, enter a page number to go to the page. Click  to control whether the number of channels is displayed or not. Select a channel and click , then the channel count is cleared. Click , then the counts of all device channels are cleared.</p>

5	Display area	<p>View the number and status of the selected channels or groups.</p> <p>一般人  Normally, the icon is green if the number of people who stay in does not exceed the limit. The displayed number of allowed people is also green. And you can see Please Enter.  However, the icon is red if the number of people who stay in exceeds the limit. The displayed number of allowed people is also red. And you can see Please Wait.</p> <p>In the display area, you can click  to turn the area into full screen mode. If the display of advertisements is not set, the display area is in full screen mode. Otherwise, the advertisements are played in turn. In this case, all numbers, icons, and text in the display area are shown on the right side of the screen, so you can view the specific numbers regarding the channel in real time.</p> <p>To exit full screen mode, right-click to exit. And, you return back to the original window.</p>
6	Statistics display area	<p>View the number of people who enter, leave, and stay in respectively in each hour within one day. If a number is 0, it is shown as -.</p>


Click the **Group** tab to enter the group preview. The group preview is different from the channel preview. For channel preview, you can set the parameters of each channel. For group preview, you can only set the parameters of the whole group,

and each channel only shows the number of people who enter and leave respectively. The group preview can be shown in map mode.

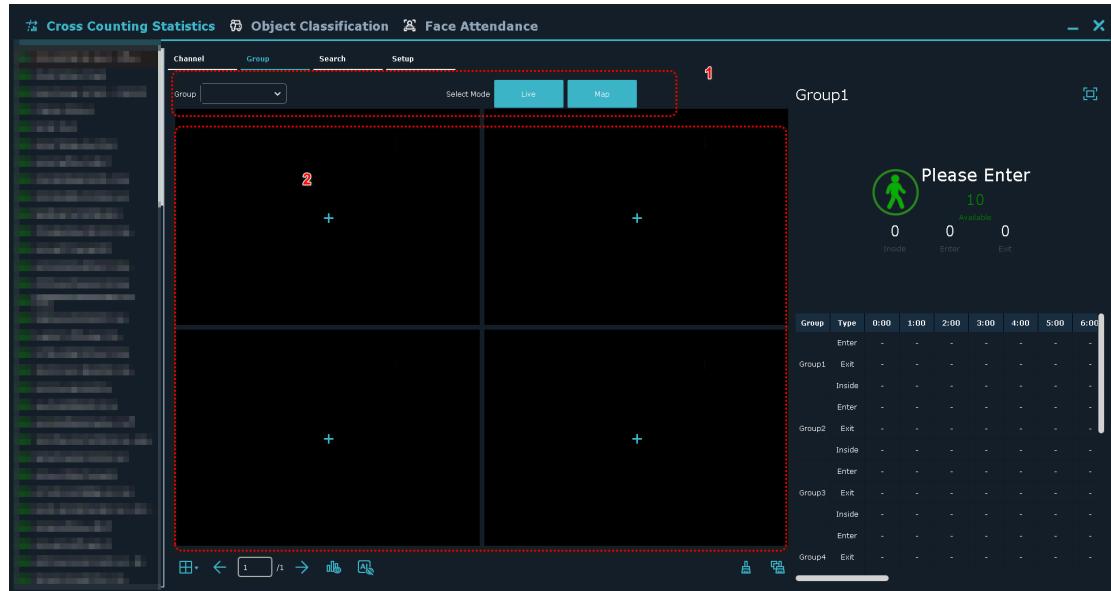


Set **Select Mode** to switch between modes. **Live** means the preview mode. **Map** means the map mode. Preview mode is the default one.

Click **Map** to enter map mode, as shown in the following figure:

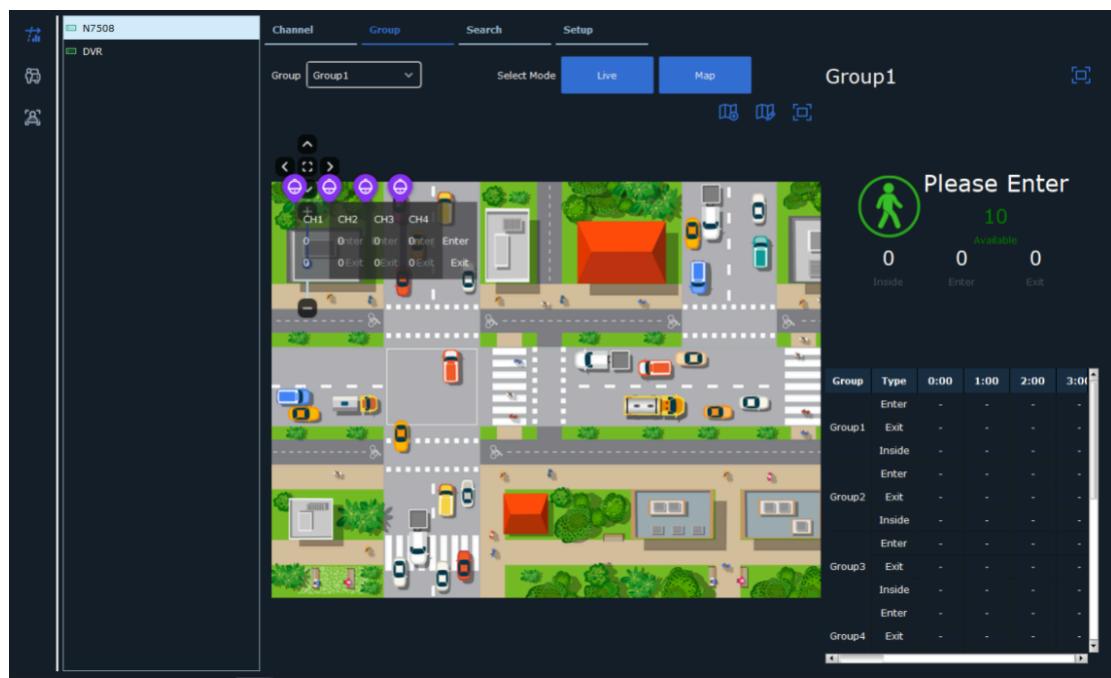

Click  to add a map, click  to modify the map, and click  to enter full screen mode.


Click the **Search** tab to go to the cross counting page, as shown in the following figure:

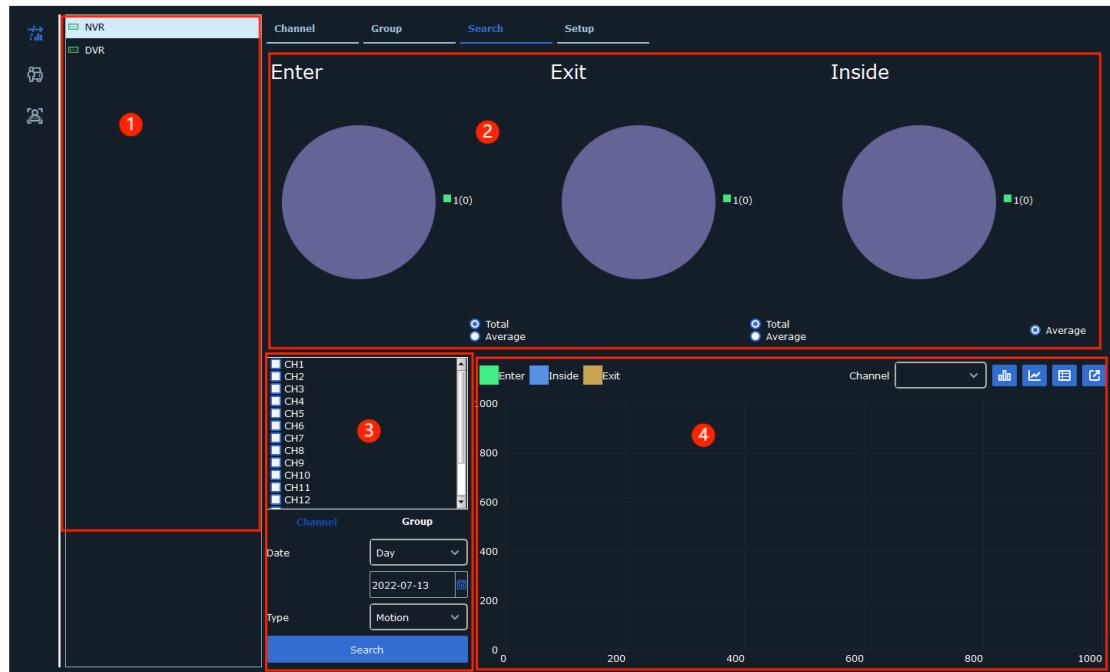

No.	Item	Description
1	Device list	View the devices that support the cross counting scene.
2	Search display area	Pie charts show the total number and average number of people who enter, leave, and stay in respectively within a time period for each channel or group. Click <input checked="" type="radio"/> Total or <input type="radio"/> Average to toggle between the total and average number of people.
3	Search setting area	Set the channel or group, date, time period, and type for search.

4	Result display area	<p>A column chart, line chart, or table shows the trend of the number of people who enter and leave.</p> <p>From the drop-down list, you can switch the channel or group. The three buttons are used to switch among the column chart, line chart, and table.</p> <p>Click the export button to export data.</p>
---	---------------------	--


On the **AI scene** page, choose **Setup** to enter the cross counting scene configuration page, as shown in the following figure:

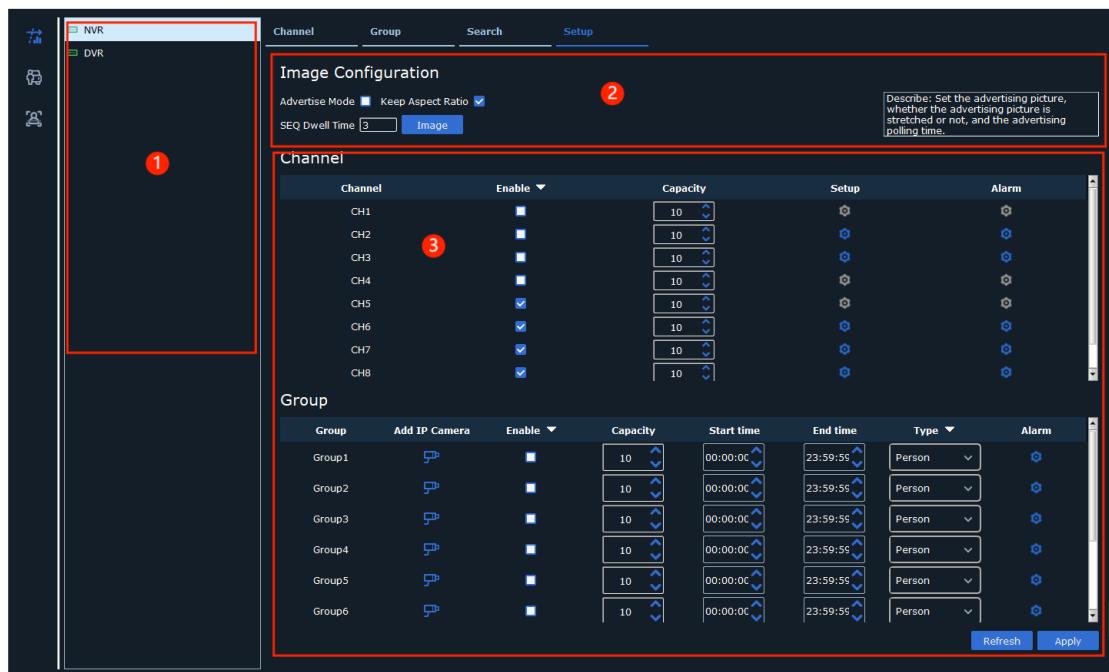

No.	Item	Description
1	Device list	View the devices that support the cross counting scene.
2	Advertisement configuration	<p>Advertise Mode: Whether in advertising mode.</p> <p>Keep Aspect Ratio: Whether to keep the aspect ratio.</p> <p>SEQ Dwell Time: Indicates the polling time.</p> <p>Image button: Enter image management to add and delete advertisement images.</p>
3	Channel and group configuration	<p>Channel configuration:</p> <p>One data item for one channel of a device. Channel: channel number; Enable: display or not; Capacity: Set the limit for the number of people who can enter and stay in. Setup: Set cross counting parameters. See Figure 15-7. Alarm: Set alarm output parameters. See Figure 15-8.</p> <p>Group configuration:</p> <p>A group can contain up to eight groups. Group: group number. Add IP Camera: Click  to configure group channels. Enable: display or not; Capacity: Set the limit for the number of people who can enter and stay in. Start time and End time: Set the start time and end time. Type: Set the detection type, which can be human or vehicle. Alarm: Set alarm output parameters.</p>

13.4 Hybrid Detection

On the **AI scene** page, click  to enter the hybrid detection scene, as shown in the following figure:

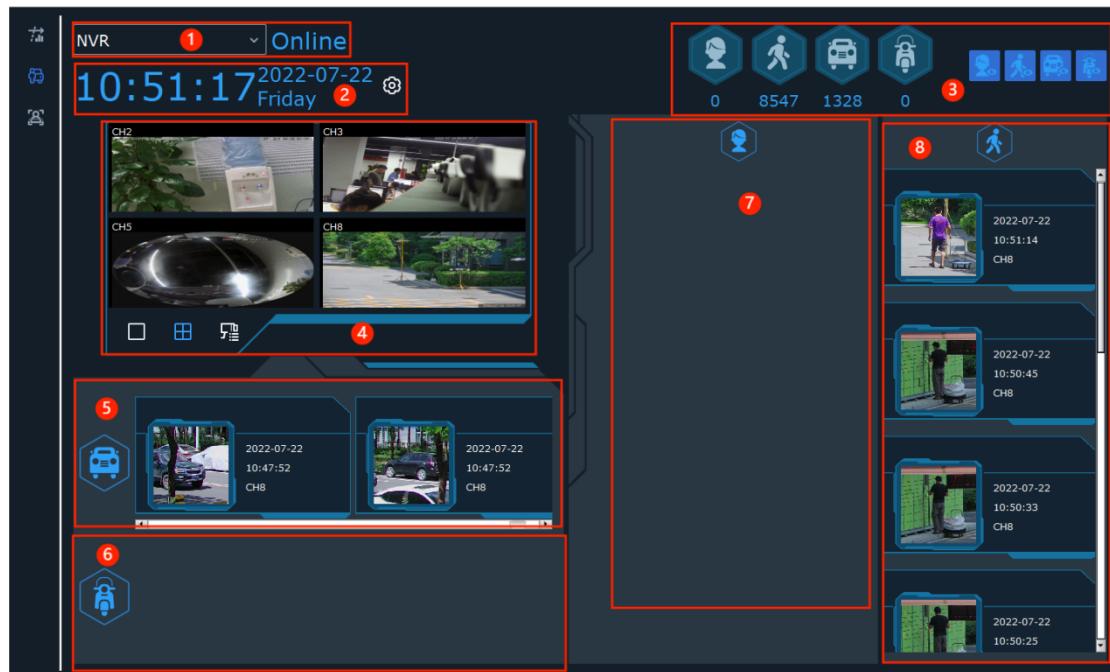


Each part is described in the following table:

No.	Item	Description
1	Device name and status	In the drop-down list, you can switch devices. Online: the device is online; Offline: the device is offline.
2	Time, statistics duration setting	View the current time, and set the statistics duration for the hybrid detection type.
3	Capture statistics and control area display	View the detection types and accumulated capture data of the selected device in the specified duration.  Click a type to control whether to hide or show the corresponding display area.
4	Preview area	Live view window. Click  to switch to a single channel preview, and click  to switch to a four-channel preview. Click continuously to switch preview channels. Click  to select the preview channels you need.
5	Vehicle capture display area	View the captured vehicle images, capture time, and channel in real time.
6	Non-motorized vehicle capture display area	View the captured non-motorized vehicle images, capture time, and channel in real time.
7	Face capture display area	View the captured face images, capture time, and channel in real time.
8	Passerby capture display area	View the captured passerby images, capture time, and channel in real time.

13.5 Face Attendance

On the **AI scene** page, click  to enter the face attendance scene, as shown in the following figure:

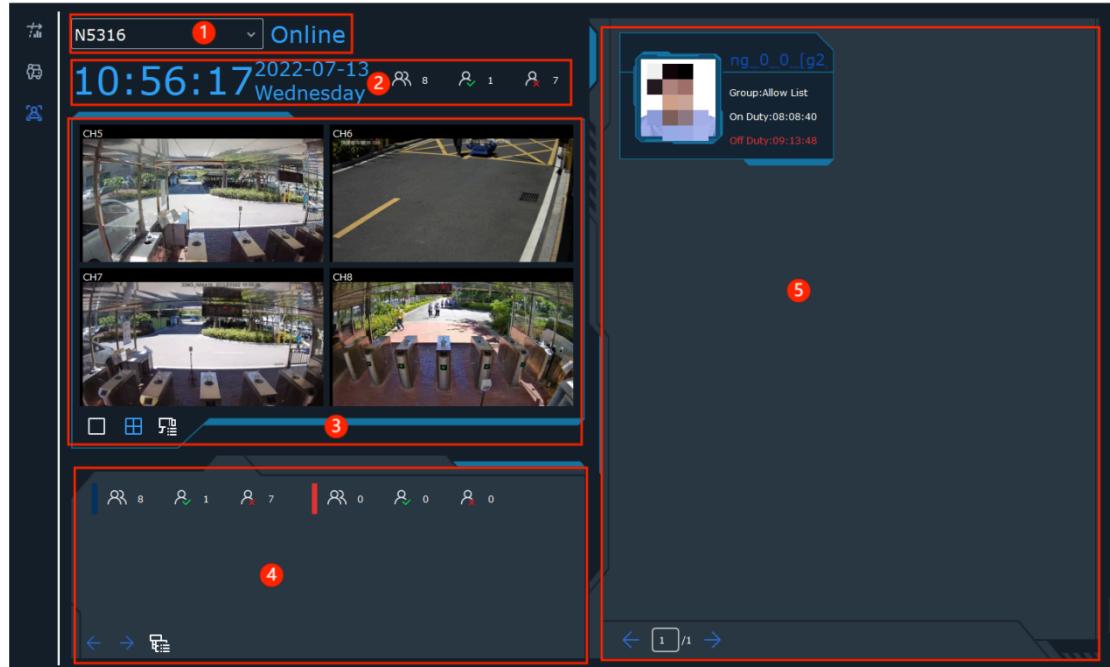

Each part is described in the following table:

No.	Item	Description
1	Device name and status	Right-click to switch devices. When the device is online, Online in blue is shown. When the device is offline, Offline in red is shown.
2	Time, total number display area	View the current time, and the total number of people who should attend, who have attended, and who have not attended respectively.


3	Preview area	Select a channel in view preview. Click  to switch to a single channel preview. Click  to switch to a four-channel preview, and click it again to switch pages. Click  to open the channel selection window and select the preview channels you need.
4	Group attendance statistics area	View the number of people who should attend, who have attended, and who have not attended respectively in each face group on that day. Click   to switch pages, and click  to select a group for statistics.
5	Attendance information display area	<p>View the information and attendance time of people who have attended.</p> <p>When the attendance time is marked white, the attendance is normal.</p> <p>When the attendance time is marked red, the attendance is abnormal.</p> <p>Click    to switch pages</p>

Chapter 14 Alarm Settings

On the alarm settings page, you can set and switch on or off channel alarms.


14.3 Alarm Interface Introduction

From the main menu, choose **Alarm Config** to go to the alarm settings page, as shown in the following figure:

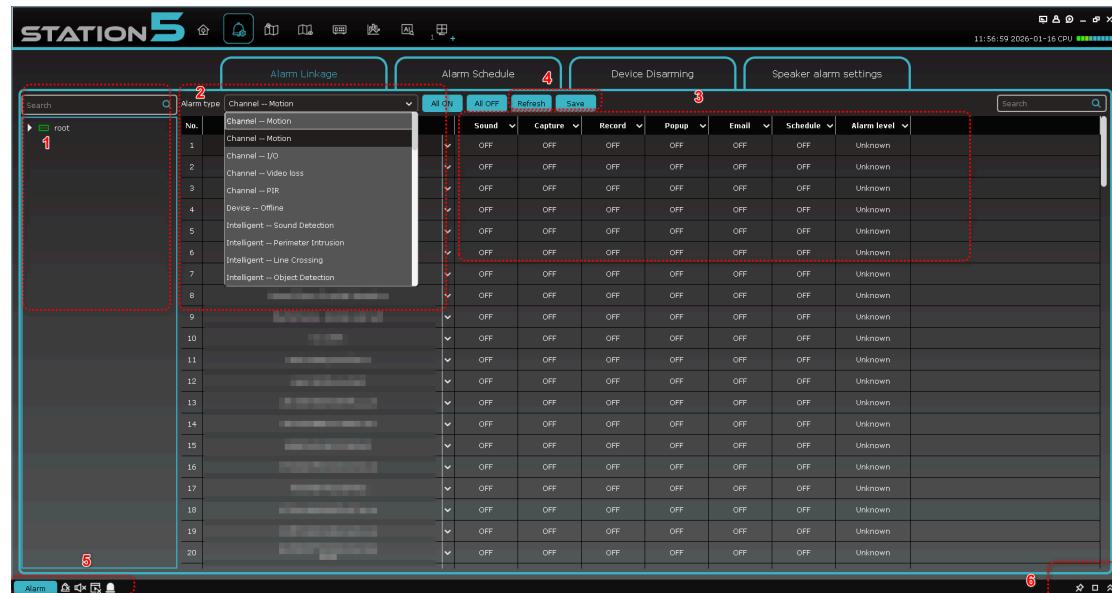

The functions on the page are described in the following table:

No.	Parameter	Description
1	Device list	Open a device group and select a channel.
2	Alarm type	<p>The alarm type, with the following options:</p> <ul style="list-style-type: none">• Motion• I/O• Video Loss• PIR• Intelligent• Offline

3	Alarm triggered operation	<p>The triggered operation, with the following options:</p> <ul style="list-style-type: none"> • Capture • Record • Popup • Sound
4	Copy and save	<p>Click Copy to copy the alarm triggered operations of the channel to another channel or device. Click Save to save the settings.</p>
5	Alarm Trigger Window, Pop-Up, And Sound	<p>Click  to open the alarm trigger pop-up, and click  to delete the alarms in the alarm trigger pop-up. Click  to enable the alarm sound, and click  to disable the alarm sound. Click  to allow the alarm pop-up, and click  to deny the alarm pop-up.</p>
6	Alarm thumbnail and alarm trigger window	<p>Click , namely , to choose whether to hide the alarm thumbnail in the preview area. Click  to zoom in the alarm trigger pop-up. Click  to expand or collapse the alarm trigger pop-up.</p>

14.4 Alarm Setting Operations

Step 1: Select a device in the device list, and select a channel of the device.

Step 2: Select an alarm type.


Step 3: Switch on the alarm button under the alarm type, and select the options you need.

Step 4: Click **Save**.

Step 5: To apply the same alarm settings to another channel or device, click **Copy** and select the target channel on the displayed menu. Click **Confirm** to save the settings. (**Note:** The copy function takes effect only after you have saved the alarm trigger operations for a channel.)

14.5 Alarm Trigger Window, Pop-Up, And Sound

- Click **Alarm** in the lower left corner to open the alarm trigger window, as shown in the following figure:

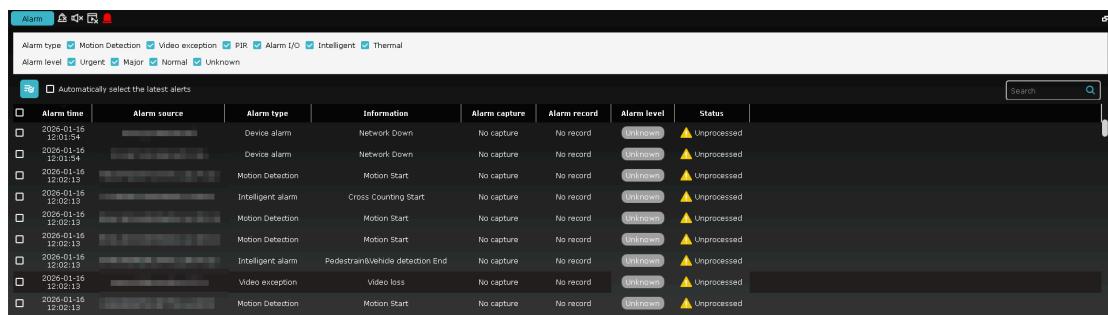

Alarm time	Alarm source	Alarm type	Information	Alarm capture	Alarm record	Alarm level	Status
2026-01-16 12:01:54		Device alarm	Network Down	No capture	No record	Unknown	▲ Unprocessed
2026-01-16 12:01:54		Device alarm	Network Down	No capture	No record	Unknown	▲ Unprocessed
2026-01-16 12:01:54		Motion Detection	Motion Start	No capture	No record	Unknown	▲ Unprocessed
2026-01-16 12:02:13		Intelligent alarm	Cross Counting Start	No capture	No record	Unknown	▲ Unprocessed
2026-01-16 12:02:13		Motion Detection	Motion Start	No capture	No record	Unknown	▲ Unprocessed
2026-01-16 12:02:13		Motion Detection	Motion Start	No capture	No record	Unknown	▲ Unprocessed
2026-01-16 12:02:13		Intelligent alarm	Pedestrian\Vehicle detection End	No capture	No record	Unknown	▲ Unprocessed
2026-01-16 12:02:13		Video exception	Video loss	No capture	No record	Unknown	▲ Unprocessed
2026-01-16 12:02:13		Motion Detection	Motion Start	No capture	No record	Unknown	▲ Unprocessed

- In the alarm trigger window, you find:

Alarm type Motion Detection Video exception PIR Alarm I/O Intelligent Thermal
Alarm level Urgent Major Normal Unknown

Alarm time, Alarm source, Alarm type, Information, Alarm capture, and Alarm record.

Select an alarm type in . Click an image or screenshot to view the details.

- Click  to zoom in the alarm information window, as shown in the following figure:

Alarm time	Alarm source	Alarm type	Information	Alarm capture	Alarm record
2022-08-02 09:01:11	8M-HY08 Camerjiruju65	Motion detection	Motion begin	Capture failed	30_6_Camerjiruju65_20220802092101.mp4
2022-08-02 09:20:58	172.16.16.106 339G去光敏程序测试 16:104	Intelligent alarm	FD alarm start	No capture	No record
2022-08-02 09:21:00	CH29XH3_16M rftg658	Sound Alarm	Sound alarm start	No capture	No record
2022-08-02 09:20:58	172.16.16.106 二号岗斜角16.102	Motion detection	Motion begin	No capture	No record
2022-08-02 09:20:59	172.16.16.106 RS-CH852H7C33-AP	Intelligent alarm	PD alarm end	No capture	No record
2022-08-02 09:20:59	CH29XH3_16M rftg658	Sound Alarm	Sound alarm end	No capture	No record
2022-08-02 09:20:59	N7508 RS-CH852H7C33-AP	Intelligent alarm	End of human and vehicle detection	No capture	No record
2022-08-02 09:20:56	CH29XH3_16M rftg658	Motion detection	Motion begin	No capture	No record
2022-08-02 09:20:54	172.16.16.106 1F-16.151--500W	Motion detection	Motion begin	No capture	No record
2022-08-02 09:20:54	172.16.16.106 339G_IMX415	Motion detection	Motion end	No capture	No record
2022-08-02 09:20:54	172.16.16.106 339G去光敏程序测试 16.104	Motion detection	Motion end	No capture	No record
2022-08-02 09:20:54	172.16.16.106 1F-16.103--200W	Motion detection	Motion end	No capture	No record
2022-08-02 09:20:54	172.16.16.106 1F-16.101--200W	Motion detection	Motion end	No capture	No record
2022-08-02 09:20:52	CH29XH3_16M rftg658	Motion detection	Motion end	No capture	No record
2022-08-02 09:20:52	172.16.16.106 二号岗斜角16.102	Motion detection	Motion end	No capture	No record
2022-08-02 09:20:44	8M-HY08 CH233ee555	Motion detection	Motion begin	22_7_CH233ee555_20220802092045.mp4	22_6_CH233ee555_20220802092045.mp4
2022-08-02 09:20:44	8M-HY08 CH3	Motion detection	Motion begin	23_7_CH3_2022_23_6_CH3_20220802092045.mp4	23_6_CH3_20220802092045.mp4
2022-08-02 09:20:44	8M-HY08 CH4	Motion detection	Motion begin	24_7_CH4_2022_24_6_CH4_20220802092045.mp4	24_6_CH4_20220802092045.mp4
2022-08-02 09:20:44	8M-HY08 CH5	Motion detection	Motion begin	25_7_CH5_2022_25_6_CH5_20220802092045.mp4	25_6_CH5_20220802092045.mp4
2022-08-02 09:20:44	8M-HY08 CH6	Motion detection	Motion begin	26_7_CH6_2022_26_6_CH6_20220802092045.mp4	26_6_CH6_20220802092045.mp4
2022-08-02 09:20:44	8M-HY08 CH7	Motion detection	Motion begin	27_7_CH7_2022_27_6_CH7_20220802092045.mp4	27_6_CH7_20220802092045.mp4


- The device channels with alarm trigger operations are displayed, so you can view the alarms in real time, as shown in the following figure:

Chapter 15 Account Management


Add and delete users, and modify user permissions on the account management page.

15.3 Adding Users

Step 1: From the main menu, choose **Account Management** to enter the account management page, as shown in the following figure:

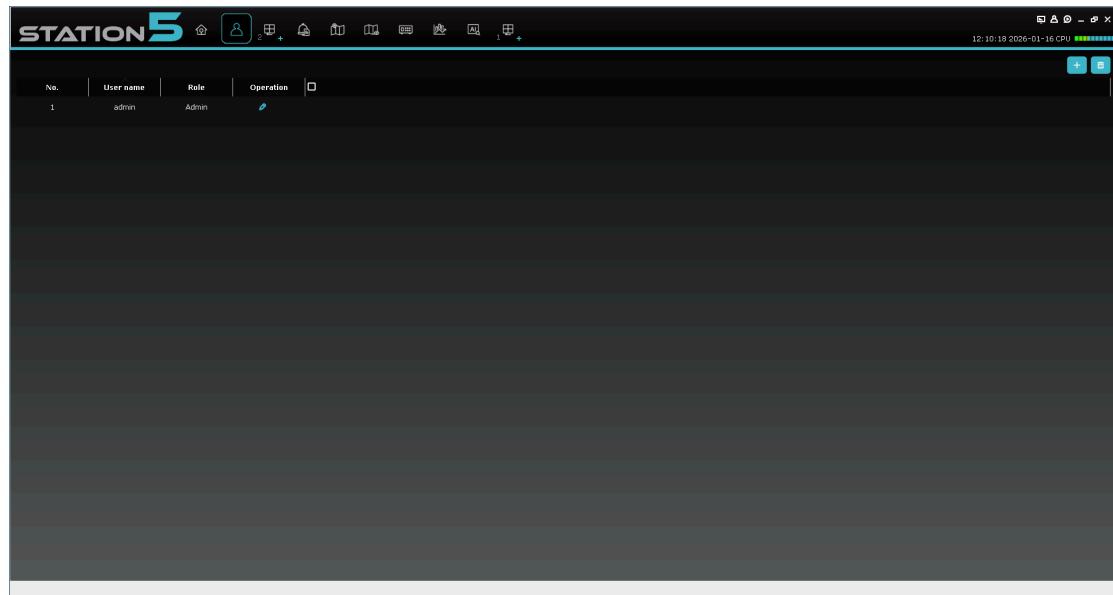

Step 2: Click in  the upper right corner. A dialog box is displayed, as shown in the following figure:

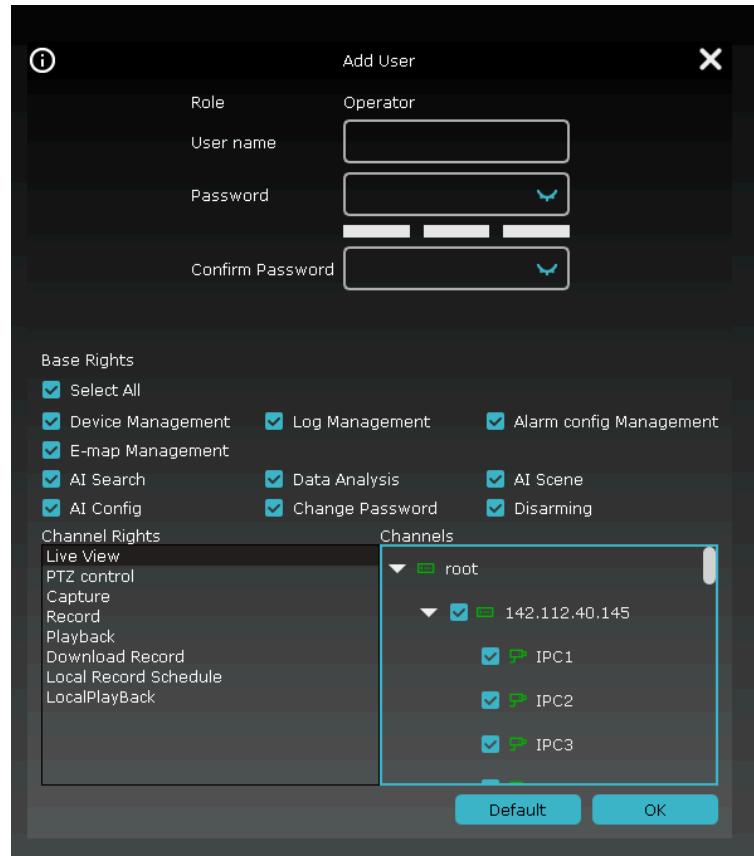

The parameters are described in the following table:

Parameter	Description
User Name	The only identifier of a user. The username is unique.
Password	The user password and password confirmation.
Confirm Password	The passwords must be consistent.
Base Rights	<p>Set basic user permissions as needed. The permissions involve:</p> <p>Device Management: Device Management</p> <p>Log Management: Log Management</p> <p>Alarm Config Management: Alarm configuration management</p> <p>E-map Management: Electronic map management</p> <p>Attendance Management: Attendance Management</p> <p>Topology Management: Topology Management</p> <p>AI search: Intelligent search; Data analysis: Data Analysis</p> <p>AI Scene: Intelligent scene; AI config: Intelligent Configuration</p> <p>Change Password: Change the password</p>


Step 3: Set channel permissions as needed. Select channels on the right for each permission. The parameters are described in the following table:

Parameter	Description
Live View	Real-time Preview
PTZ Control	PTZ Control
Capture	Capture
Record	Recording
Playback	Playback
Download Record	Export a recording
Local Record Schedule	Local recording plan
LocalPlayBack	Local Playback

Step 4: After settings, click **OK** to add the user. To restore default permissions, click **Default** before you click **OK**.

Note: The administrator has all rights. The rights cannot be modified or deleted. The permissions for the added users can be modified, and the users can be deleted.

15.4 Modifying Users

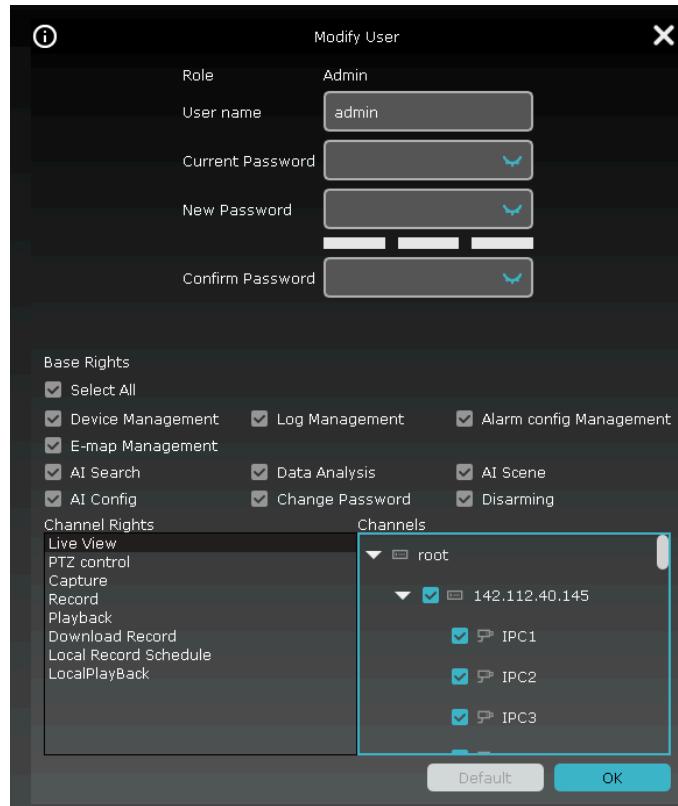

Step 1: Click  next to the user you want to modify.

Step 2: On the page that appears, modify the user permissions, username, and password as needed.

Step 3: Click **OK** to save the modification.

15.5 Deleting Users

Click  next to the user you want to delete. A dialog box is displayed. Click **OK**. Alternatively, click the checkbox of multiple users you want to delete, and click  in the upper right corner of the page to delete the users. Note that the super user cannot be deleted.


Chapter 16 Local recording plan

This chapter describes how to configure local recording plans.

Step 1: From the main menu, choose **Local Record** to enter the recording plan path selection page, as shown in the following figure:




Step 2: Select a path and click **Save**. The local recording plan page is displayed, as shown in the following figure:

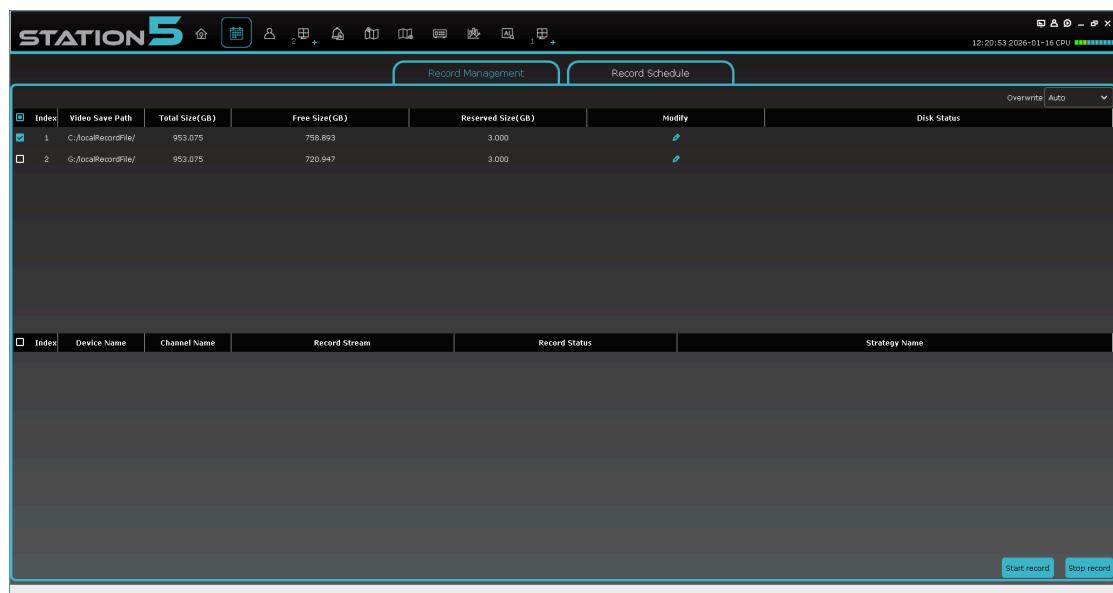


Step 3: Double-click the area to set **Reserved Size (GB)**, click **Overwrite** in the upper right corner to overwrite the time, and click **Save**.


Step 4: Click **Record Schedule** to enter the recording plan settings page. In the device tree, select a device you need. Click and hold the left mouse button, and drag to set the specific record time in the grid area, and click **Save**, as shown in the following figure:

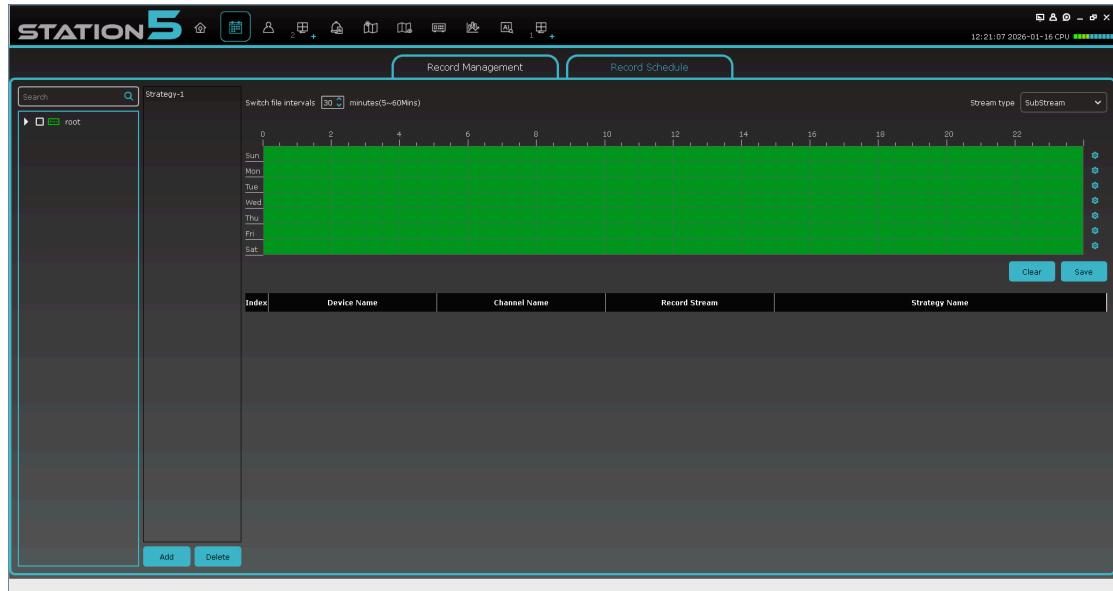


Step 5: After settings, go back to the **Record Management** page, select the checkbox of

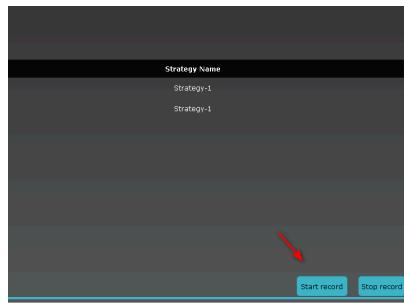


the device channel you need or select all channels, and click **Start record** in the lower right corner to start recording. After recording starts, **Writing** appears in the **Disk Status** column, and **recording** appears in the **Record Status** column on the record management page, which means the disk is recording locally, as shown in the following figure:

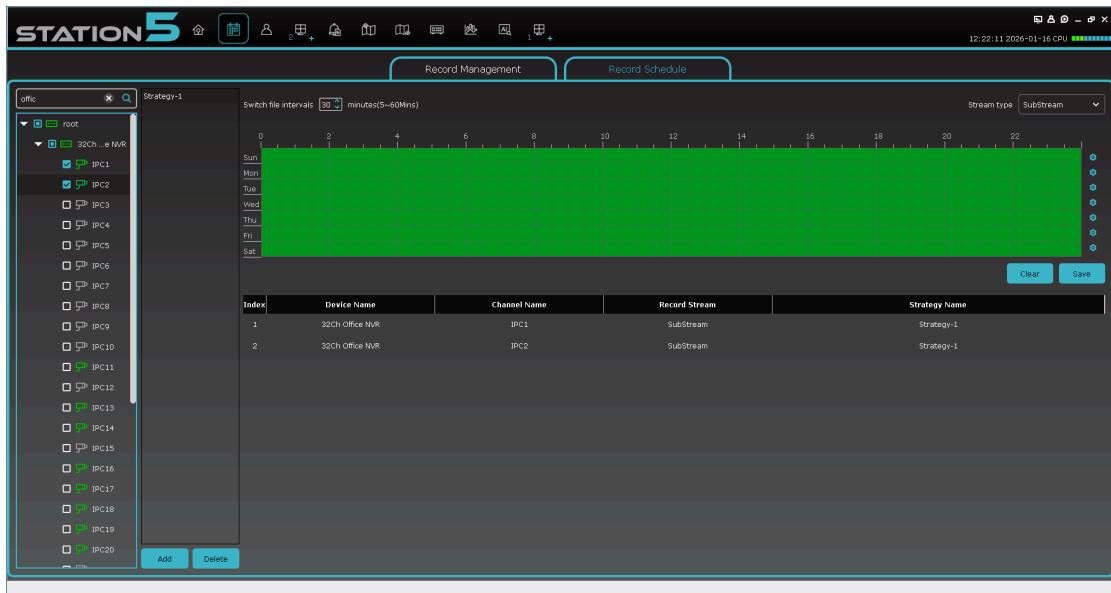

Step 6: Click  in the lower right corner to stop local recording. Then **Writing** disappears from the **Disk Status** column, and **Recording Stop** appears in the **Record Status** column on the recording management page, as shown in the following figure:

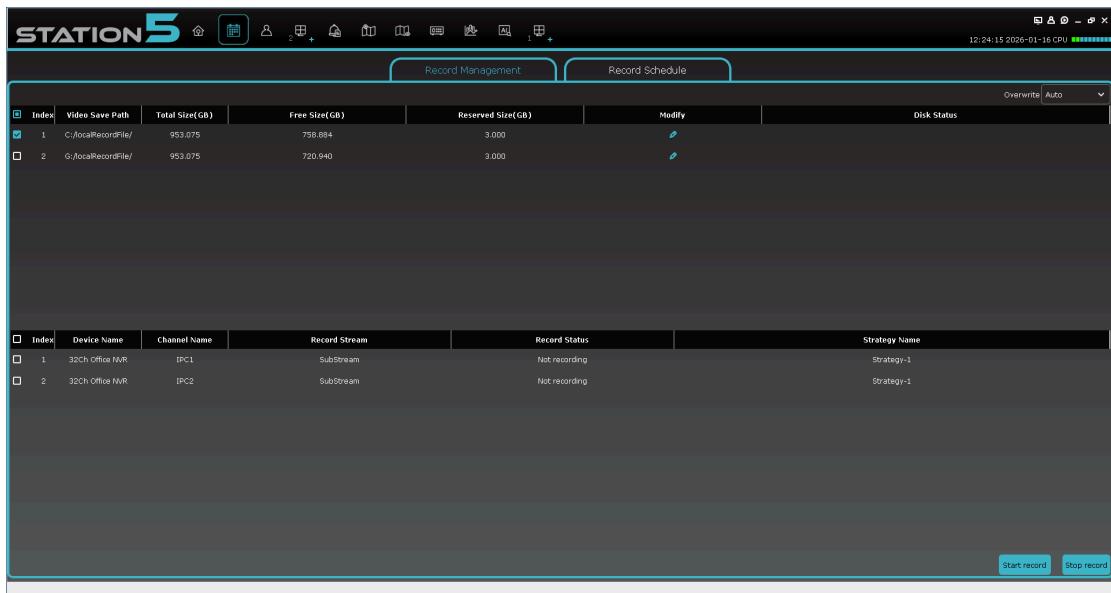

Step 7: From the main menu, choose **Local Playback** to go to the local playback page. Select the channel, and find that the calendar marks the date with local recordings, as shown in the following figure:

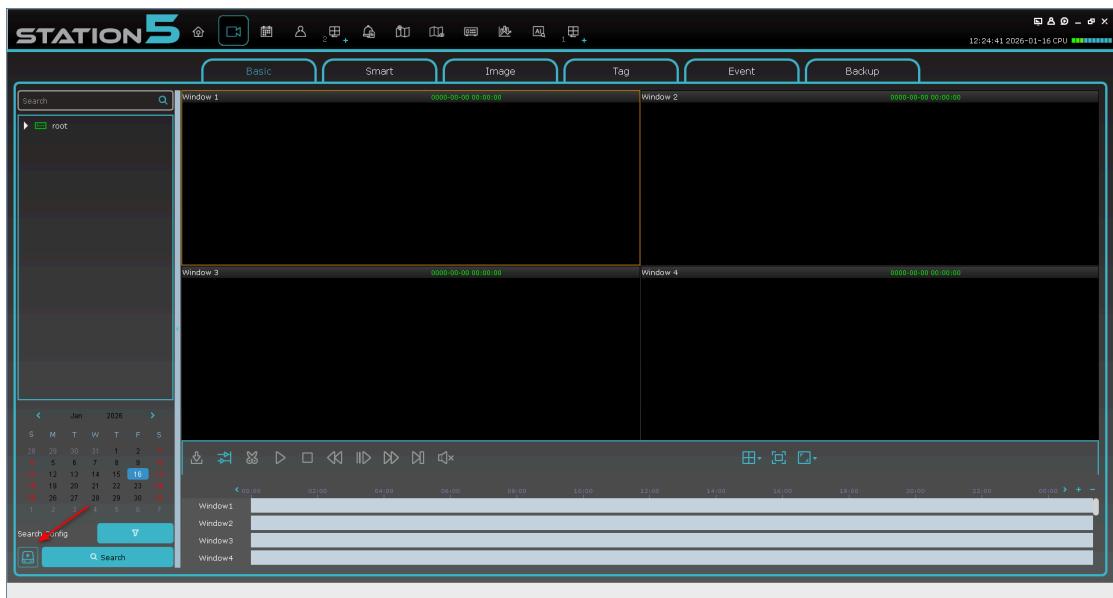


Step 8: For detailed operations about local playback, see Chapter 8 "Local Playback".

Chapter 17 System Configuration

Set the software system parameters, which involves general settings and file settings.

Step 1: From the main menu, choose **System Config** to go to the system configuration page, as shown in the following figure:

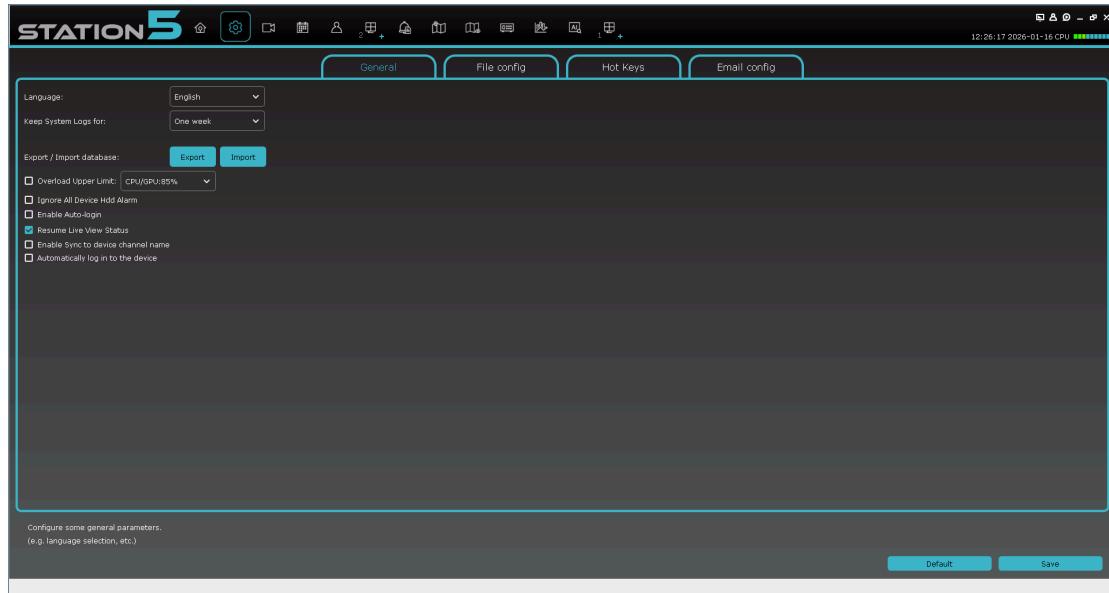

Step 2: Set system parameters. The parameters are described in the following table:

Parameter	Description
General	Language English is supported.
	Keep System Logs for The retention period of system logs: <ul style="list-style-type: none">• One week• Half a month• One month
	Enable Auto-Login Enable auto login.
	Resume Live View Status Restore live view.
File config	File type The file storage type, with the following options: <ul style="list-style-type: none">• rf• AVI• mp4
	Max File Size The maximum file size, with the following options: <ul style="list-style-type: none">• 1G• 2G
	Alarm when disk space is less than ___MB Set a value. When the disk space is lower than the value, an alarm is triggered. Select the checkbox and set the value.
	Path of Saved Pictures Set the storage path of local images.

	Path of Saved Videos	Set the storage path of local recordings.
	Alarm Sound	Set the alarm sound of each alarm trigger type.
Hot Keys	Real play in full screen (enable full screen mode); Maintain (enable preview mode); Remote playback (enable remote playback) System config (open system settings); Alarm event (open alarms); Cruise Setting (open cruise settings); Device Management (open device management); Lockscreen (lock the screen) Switch user (switch users); Open/Close alarm sound (enable or disable the alarm sound) Local Record (open local recording)	Use a hotkey to quickly enter a module, where you can double-click the hotkey in the latter part to change it.


Step 3: Click **Save** to complete system settings.

Chapter 18 Electronic Management Map


Using an electronic map, you can view the position where an alarm channel exists, and view the videos and alarms of the channel.

18.3 Adding Maps

Step 1: Click "Emap Config" in the main menu to enter the map configuration interface, as shown in the figure.

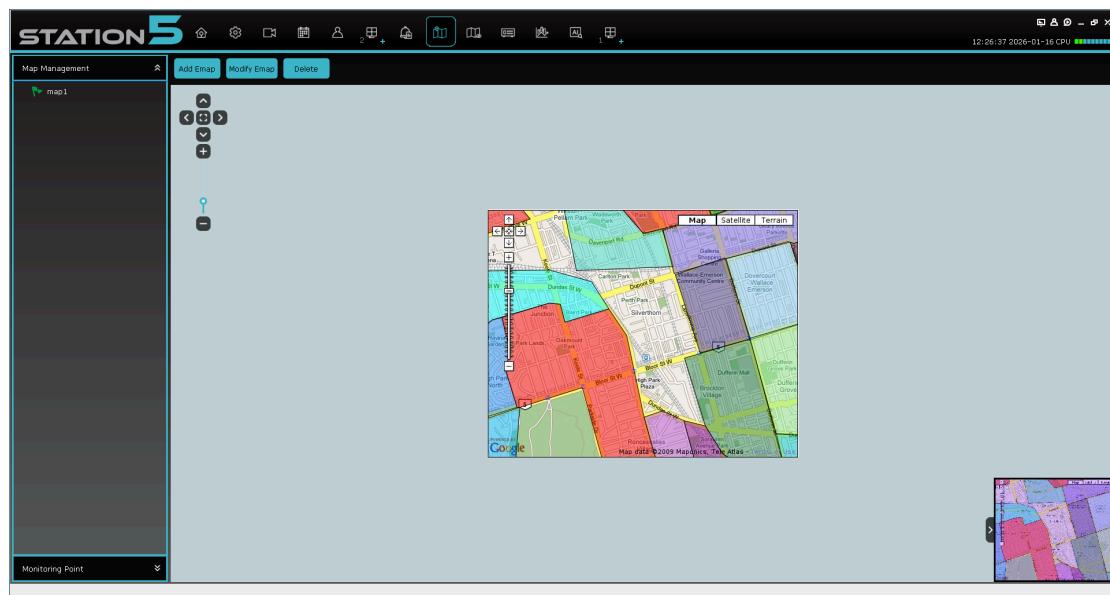

Step 2: Click "Add Emap" in the interface, and the system will pop up a map selection dialog box, as shown in the figure.

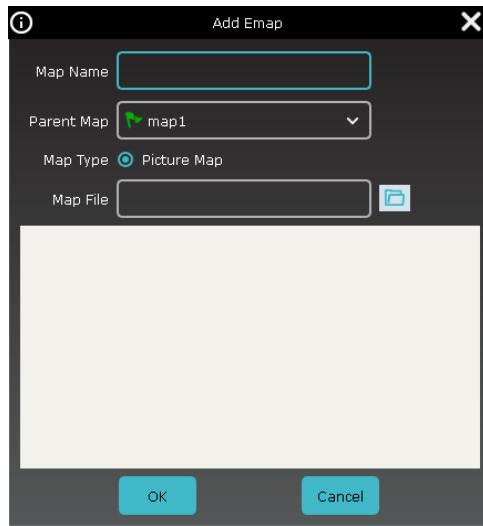


Step 3: Name the map and specify the map path.

Step 4: Click Yes to save.

18.4 Editing Maps

Double-click a map you want to edit to go to the edit page, as shown in the following figure:

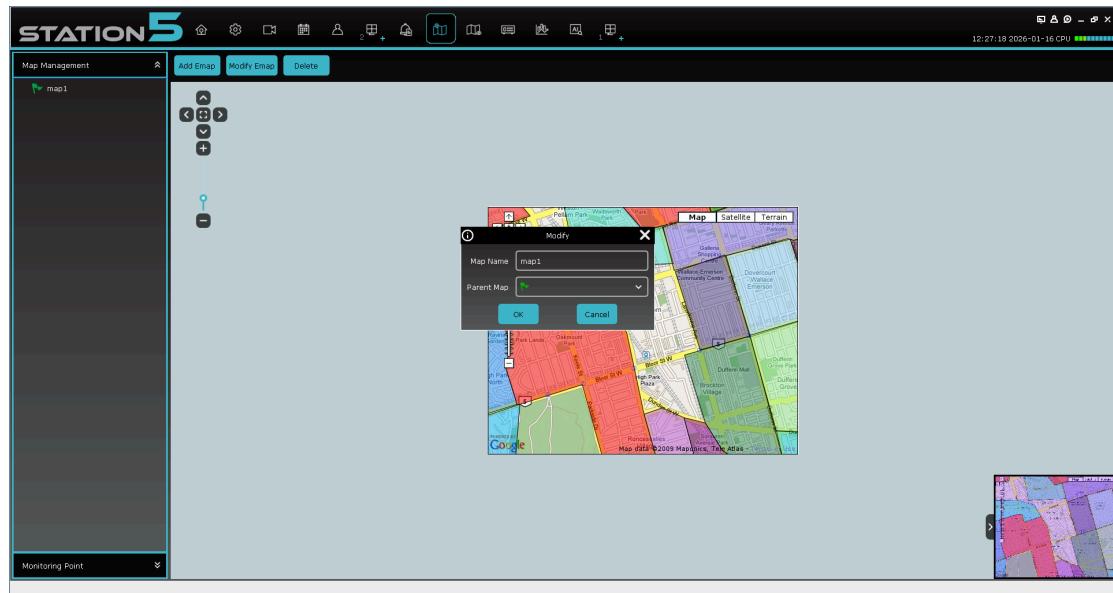


Step 1: To add a device to the map, click the "Monitoring Point" option on the left side of the interface to expand the device grouping page, and drag the device to the


specified location on the map according to actual needs.

Step 2: Click  to add hot areas on a map.

Note: To add hot areas, you need to add a new map.

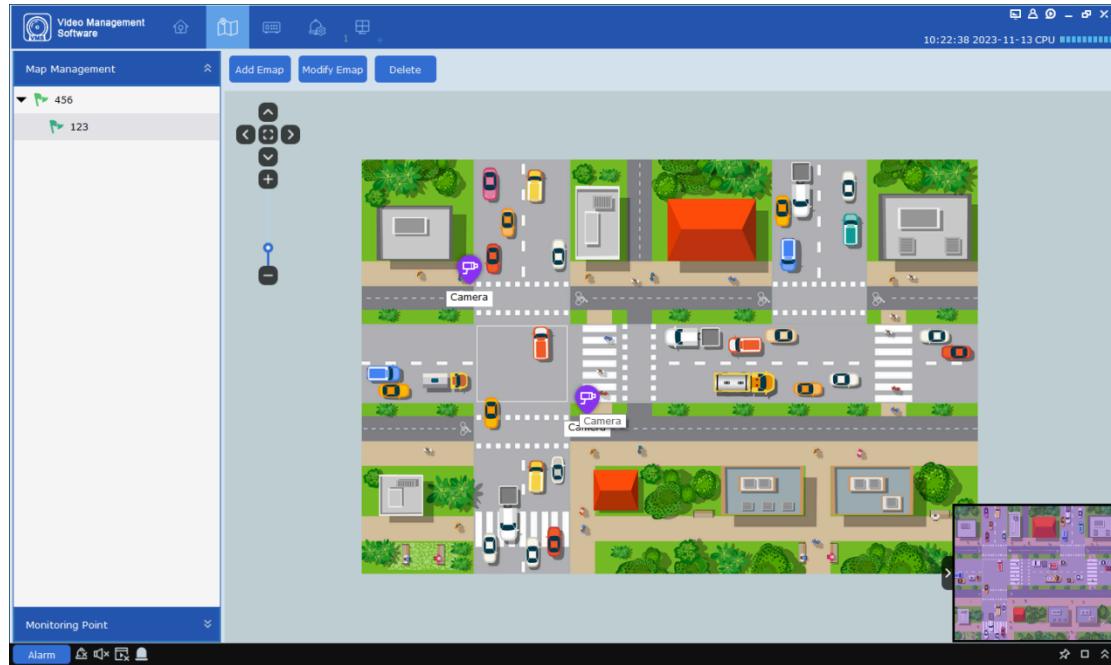


Step 3: Add hot areas to the map, and drag the devices you need to specific positions on the map, as shown in the following figure:

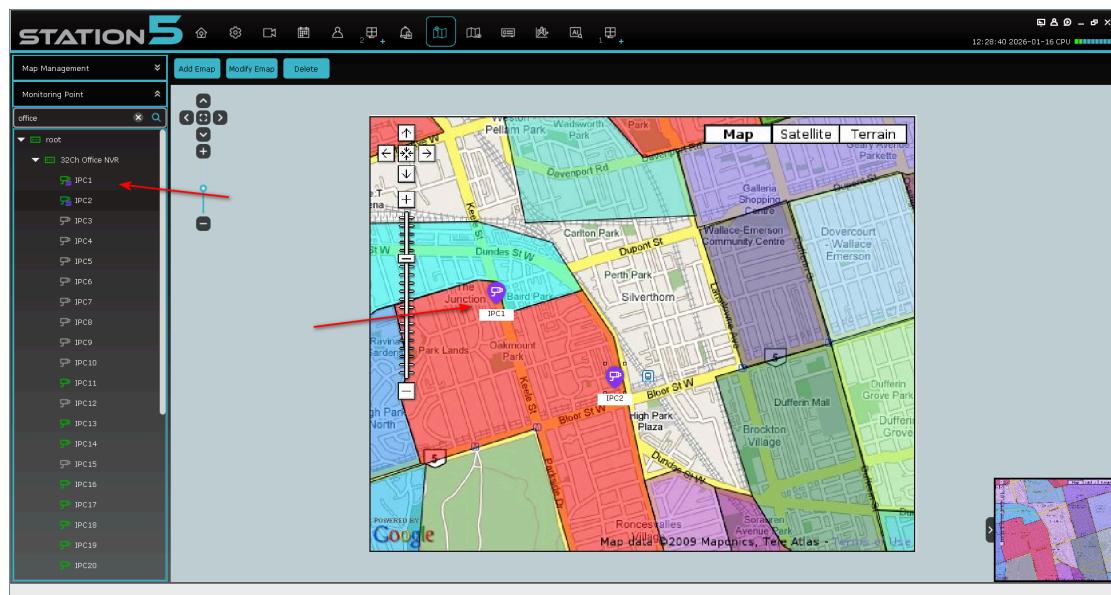

18.5 Modifying and Deleting Devices

1. Click a device icon, and double-click or click  to enter the device modification page, as shown in the following figure:

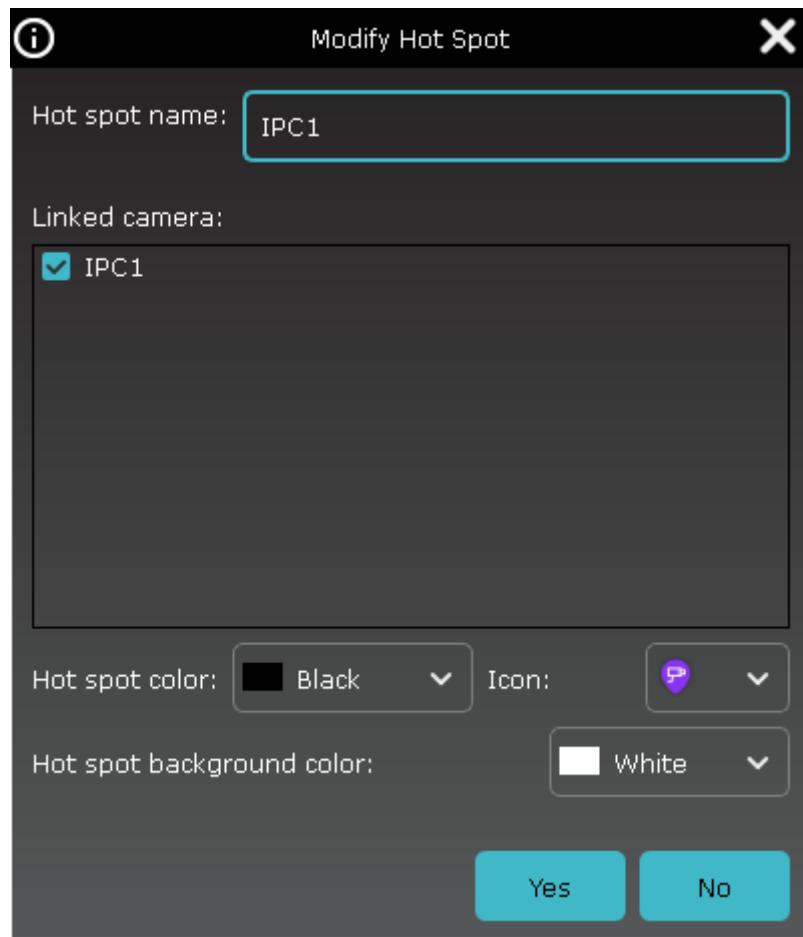

Parameter description:

Hot spot name: The name of the camera spot

Linked camera: The related cameras

Hot spot color: The color of the camera spot

Icon: The icon of the camera spot


Hot spot background color: The background color of the camera spot name

2. Click a device icon, and click . The device deletion dialog box is displayed. Click **OK** to complete the deletion.

18.6 Emap Monitoring



Through the electronic map  you can intuitively understand the location of the alarm channel and view the video or alarm status of the channel in real time. Click Emap Monitoring in the main menu to enter the map preview interface, as shown below:

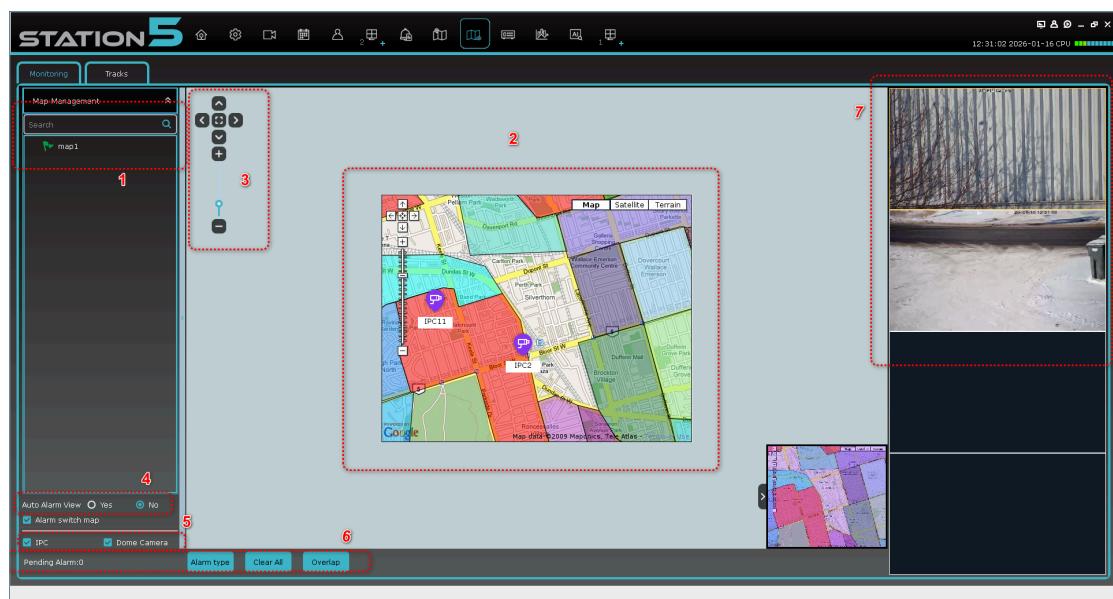

1. Map: Display the added map

2. Map preview: After clicking to select the map, the map view will be displayed there

3. Map operation area: You can perform up, down, left, right, zoom and other operations on the selected map

4. Alarm preview setting: If you select 'Yes', when the device added to the map has an alarm triggered, the alarm type logo will be displayed on the map, and the real-time picture will be automatically played in the preview box on the right; if you select 'No', the map will not be displayed on the right, and only the triggered alarm type logo will be displayed next to the corresponding device on the map.

5. Device type: There are two types of devices: network camera and network high-speed ball

6. Alarm type: You can select the alarm type to be displayed on the map; click 'Clear All' to clear the pending alarms in front; click 'Overlap' to change the preview mode

on the right, and you can freely drag the preview screen, as shown in the figure below:

When tiling, the preview screen can only be fixed on the right.

7. Alarm preview area: Double-click the device or when the automatic alarm is checked and an alarm is triggered, the real-time screen will be displayed in the preview area on the right, and up to 4 screens can be displayed.


Chapter 19 Intelligent Configuration

19.3 Recognition Management

On the **AI Config** page, click **Recognition** to open the face edit page. The page includes model configuration, face database management, database synchronization, and license plate management.

1. Model configuration


Manage face models and select various face calculation methods. Click the model configuration icon to enter the model configuration page, as shown in the following figure:

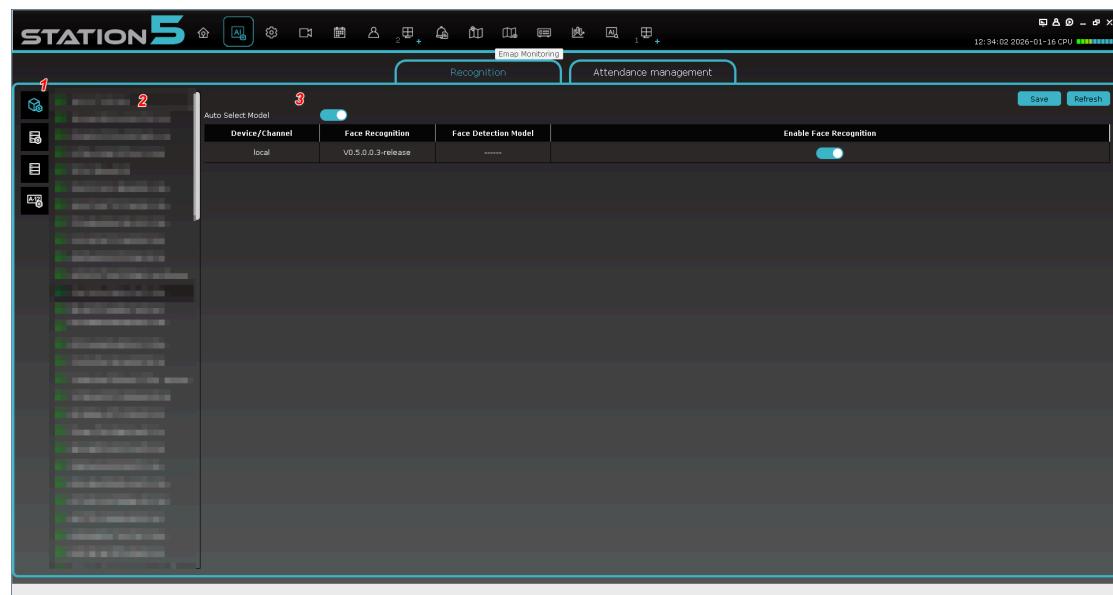

No.	Item	Description
1	Model management tab	Click to enter the model management page.
2	Device tree	View and select devices.
3	Model management area	<p>Enter the page, and select a device to view the device model information. In which, local in the Device/Channel column indicates the device model.</p> <p>Ch1... indicates the IP camera model. Only one model can be selected. If you have enabled Auto Select Model, you cannot select a model manually. After settings, click Save to save the selected model.</p> <p>Face Recognition: View the face recognition version.</p> <p>Face Detection Model: View the face detection model version.</p> <p>Save: Save changes.</p> <p>Refresh: Refresh data.</p>


2. Face database management

Add and delete face groups, modify face group information. The face database management page is shown in the following figure:

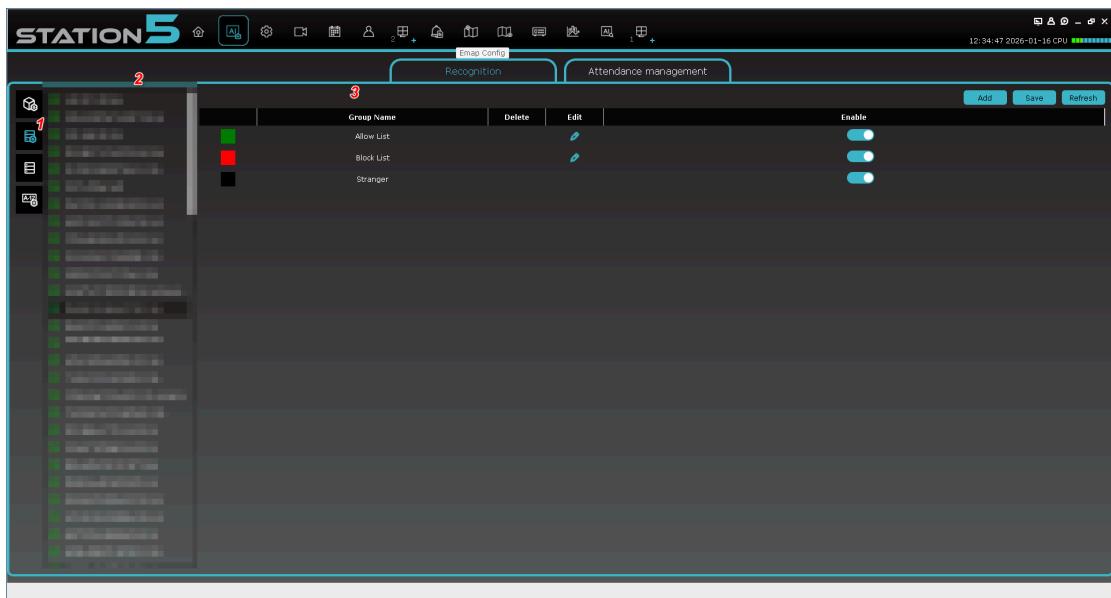


No.	Item	Description
1	Face database management tab	Click to enter the face database management page.
2	Device tree	View and select devices.
3	Face database management area	<p>Up to 16 face groups can be created for one device. Allow list, Block list, and Stranger are fixed and cannot be deleted.</p> <p>Group Name: View the face group name which can be changed.</p> <p>Delete: Delete a face group except for the three fixed groups.</p> <p>Edit: Add, delete, and modify the images in a face group.</p> <p>Enable: View the face group status.</p> <p>Add: Add a face group.</p> <p>Save: Save changes.</p> <p>Refresh: Refresh data.</p>

Add, delete, and edit face image information. Select a group and click  to enter the group setting page, as shown in the following figure:

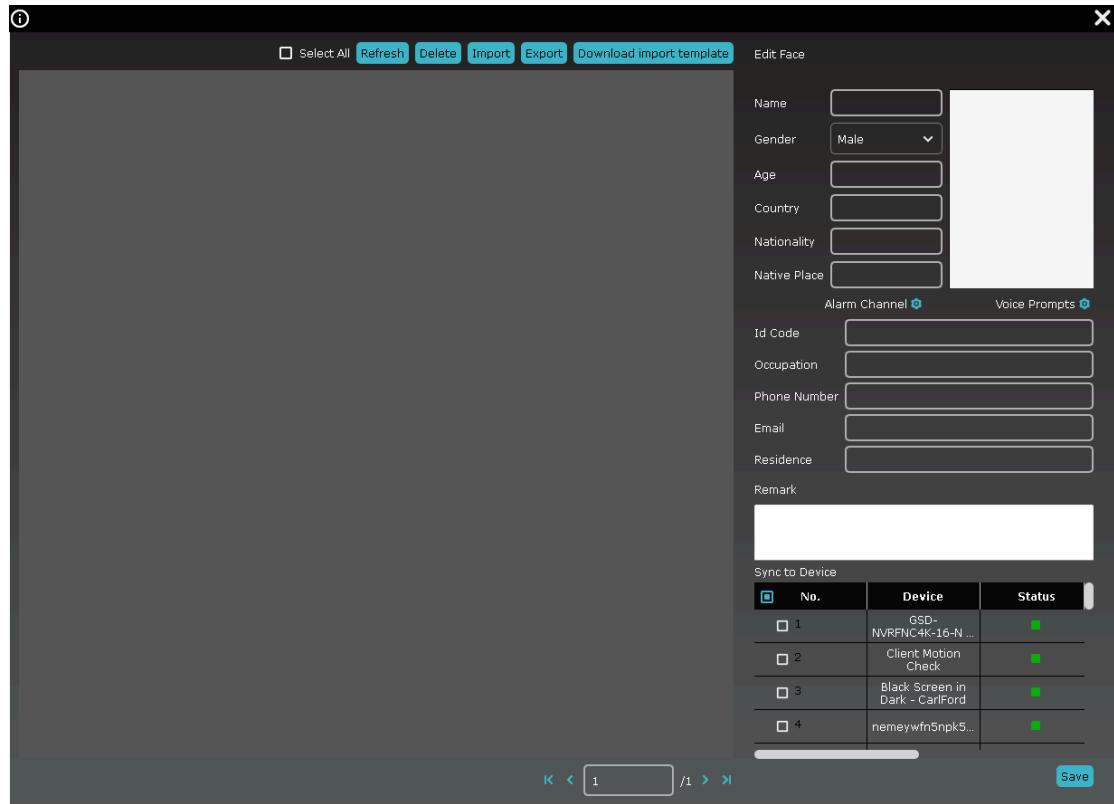

Add face images: Click **Import**. The import method dialog box is displayed, as shown in the following figure:

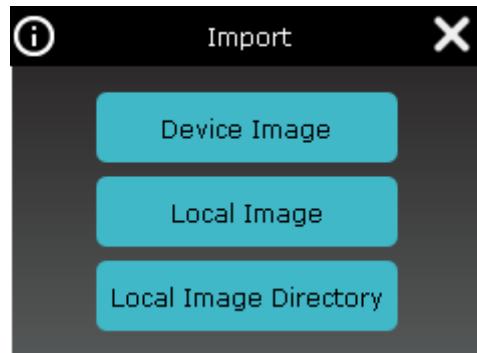

Device Image: Search for face images captured by devices and import the images to a specific group.

Local Image: Select face images saved locally and import the images to a specific group.

Local Image Directory: Select a local directory that stores face images and import the

images in batches to a specific group.

Export face images: Select face images in the current group, and click **Export**. Then select a local storage path to export the images to local storage.


Download the import template: Click **Download import template**, and select a local storage path to download the import template to local storage. Edit images based on the description in the template file. Click **Local Image** to import .csv files to upload images and the related information in batches.

Delete face images: Select face images in the current group, and click **Delete** to delete the selected images.

Refresh: Click **Refresh** to refresh the current group.

3. Database synchronization

Import and export face and license plate databases on the recognition management page.

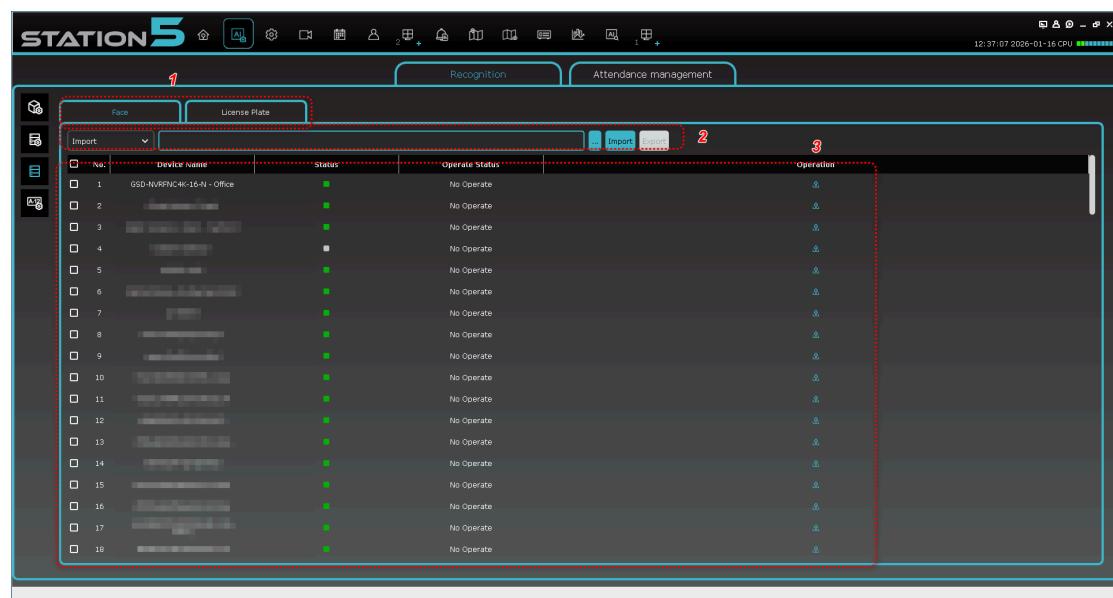

No.	Item	Description
1	Database selection	Click to enter the face or license plate database page.
2	Import and export	Import and export databases, and select local storage paths.

3	Device list	View the devices that support database operation.
---	-------------	---


Import or export a database: Click . A dialog box is displayed.



Select a path and click . After the progress bar is full, the import or export succeeds.


4. License plate management

On the **AI Config** page, click  to enter the plate management page, where you can add and delete license plate groups and edit group information.

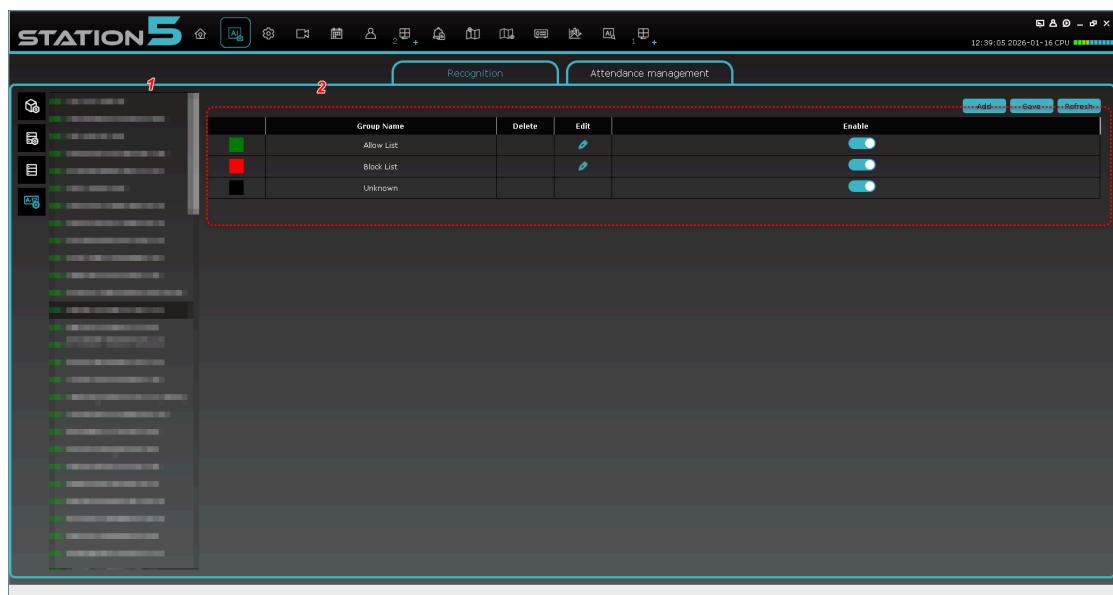

No.	Item	Description
1	Device tree	View and select devices.
2	License plate databased management area	<p>Up to 64 license plate groups can be created for one device. Allow list, Block list, and Unknown are fixed and cannot be deleted.</p> <p>Group Name: View the license plate group name which can be changed.</p> <p>Delete: Delete a license plate group you created.</p> <p>Edit: Add, delete, and modify license plate information.</p> <p>Enable: View the license plate group status.</p> <p>Add: Add a license plate group.</p> <p>Save: Save changes.</p> <p>Refresh: Refresh data.</p>

Select a group and click  to enter the license plate setting page, as shown in the following figure:

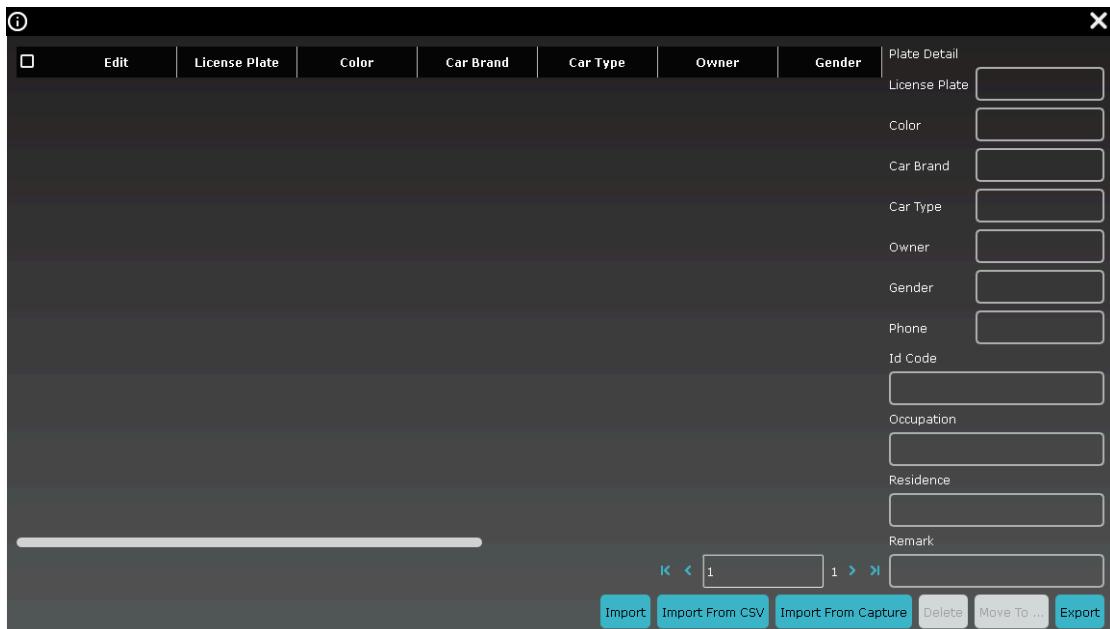

The screenshot shows a software interface for managing license plate groups. At the top, there is a toolbar with icons for Edit, License Plate, Color, Car Brand, Car Type, Owner, Gender, and Plate Detail. The Plate Detail section includes fields for License Plate, Color, Car Brand, Car Type, Owner, Gender, Phone, Id Code, Occupation, Residence, and Remark. Below this is a table with columns for License Plate, Color, Car Brand, Car Type, Owner, Gender, and Phone. The table has several rows, each representing a license plate group. At the bottom of the screen, there is a navigation bar with buttons for Import, Import From CSV, Import From Capture, Delete, Move To ..., and Export. There are also buttons for navigating between pages (K < 1 > X) and a page number indicator (1).

Click **Import**. The license plate information input page is displayed, as shown in the following figure:

Enter the relevant license plate information on the page, and set the corresponding audio and alarm channel.

Click **Export** and select a local storage path to export the license plate information from the current group. The file format is .csv.

Click **Import form CSV** and select a local .csv file to import vehicle information in batches.


Click **Import form Capture**. On the page that appears, search for license plate images captured by devices. Select images from the search results, and edit and import the information.

Click **Move to** to move the selected license plate information to another group.

Click **Delete** to delete the selected license plate information.

19.4 Attendance Management

From the main menu, choose **AI Config** to go to the AI configuration page. Click **Attendance management**, as shown in the following figure.

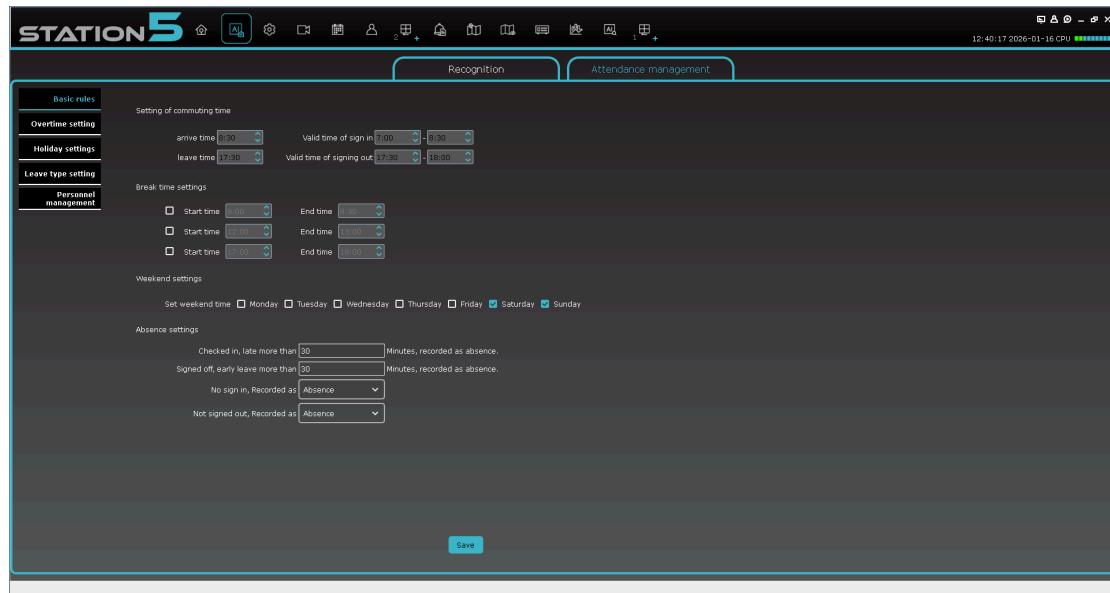

The functions on the attendance management page are described in the following table:

Parameter	Description
Alarm setting type	The alarm setting type, with the following options: <ul style="list-style-type: none">Basic rulesOvertime settingHoliday settingsLeave type settingPersonnel management


1. Basic rules

Setting of commuting time : Set office hours, and set valid time periods for clock-in and clock-out.

Weekend settings : Set weekend days. The days selected are days off.

Absence settings : Set absence. If a person has signed in and the late arrival time exceeds the office start hour by X minutes, the person is recorded absent. If a person has signed off and the early leave time exceeds the office end hour by X minutes, the person is recorded absent. For both cases, if the value is 0, the data is invalid. If sign-in or sign-out is not recorded, the value can be set to absent or early leave.

2. Overtime setting

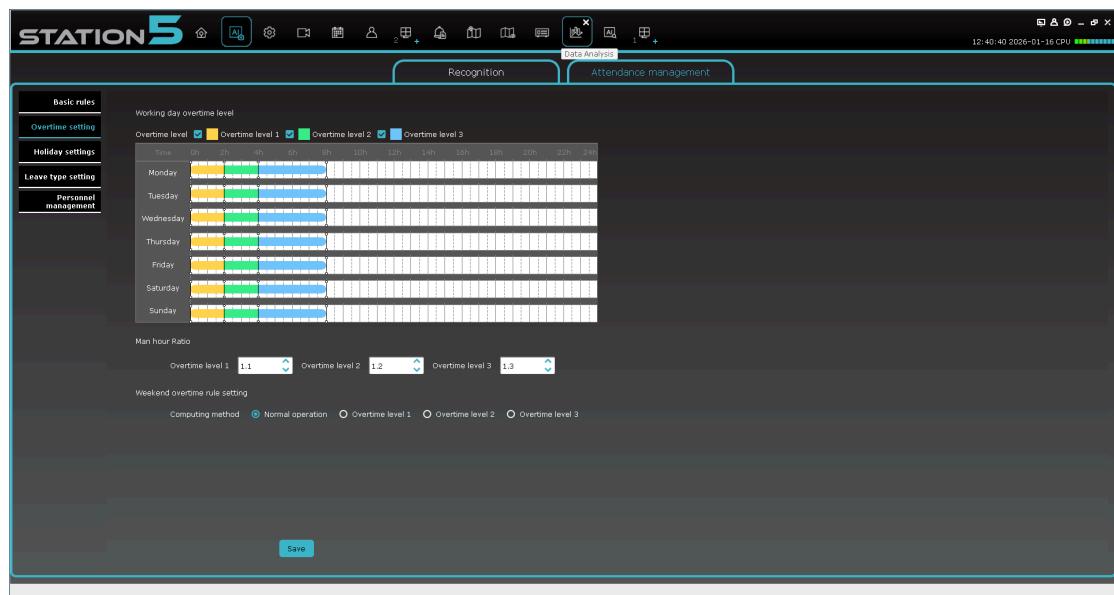


Working day overtime level : Working day overtime level. Three levels in total. If the checkbox of an overtime level is selected, the level is selected. Drag the color bar to set the time range of overtime levels.

Man hour Ratio : Man hour ratio. Set the man hour ratio for each overtime level. The overtime length is counted accordingly by the ratio.

Weekend overtime rule setting : Weekend overtime rule. Set the overtime level for weekend overtime. The overtime length is counted accordingly by the level.

Click  to save the overtime rules to the system database.

3. Holiday settings

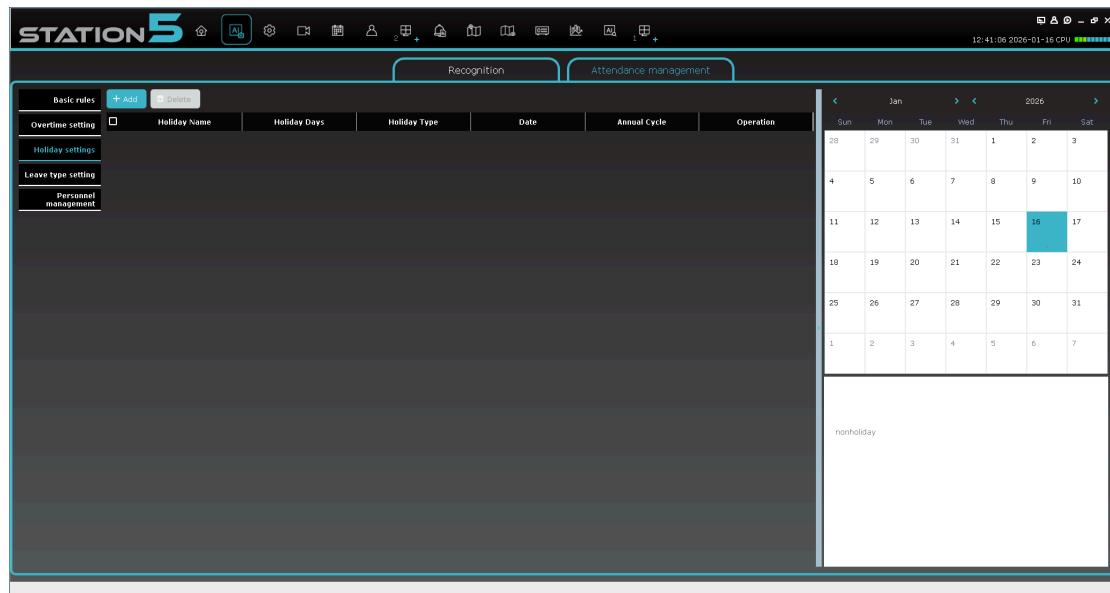


Set holiday or time off in lieu arrangements. The parameters are described in the following table:


Parameter	Description
Holiday Name	Holiday name. The name is required. If left blank, you will be reminded.
Holiday Days	The number of holiday days
Holiday Type	The holiday type
Date	The holiday start date and end date
Annual Cycle	Cycled annually or not
Operation	Modify the set holiday

After you click  , the holiday settings appear, and you can select a holiday type. If you select  , enter the holiday name, set the start time, enter the number of holiday days, select the overtime level, and select whether to cycle annually. If you select  , the method to set the date is different. As the


holiday start date is different every year, you need to set the year, date, weekend, and day.

Click  to delete the holiday that has been added and selected.


Click  to select a year on the calendar on the right side of the page.

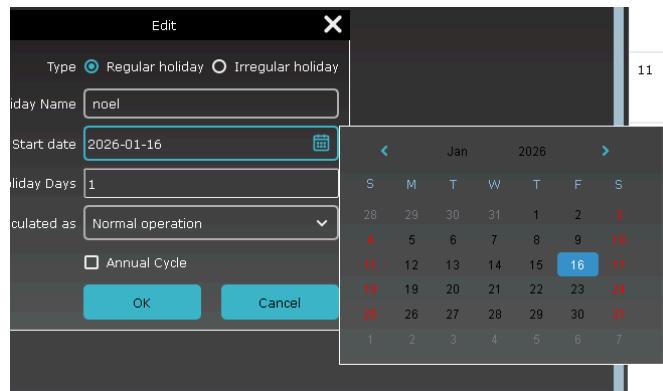

After you add a holiday, the holiday date is marked on the calendar.

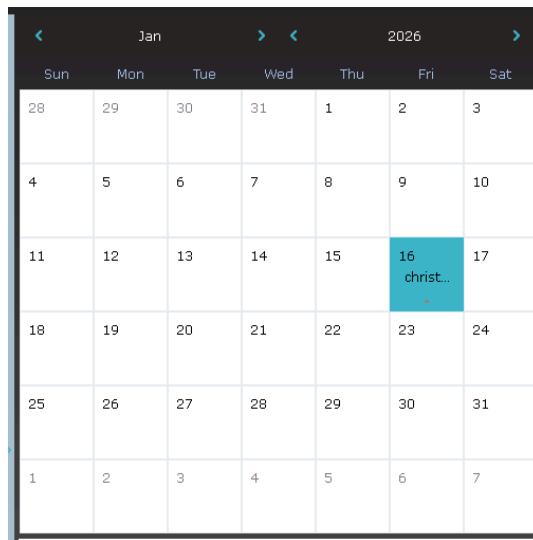

4. Leave type setting

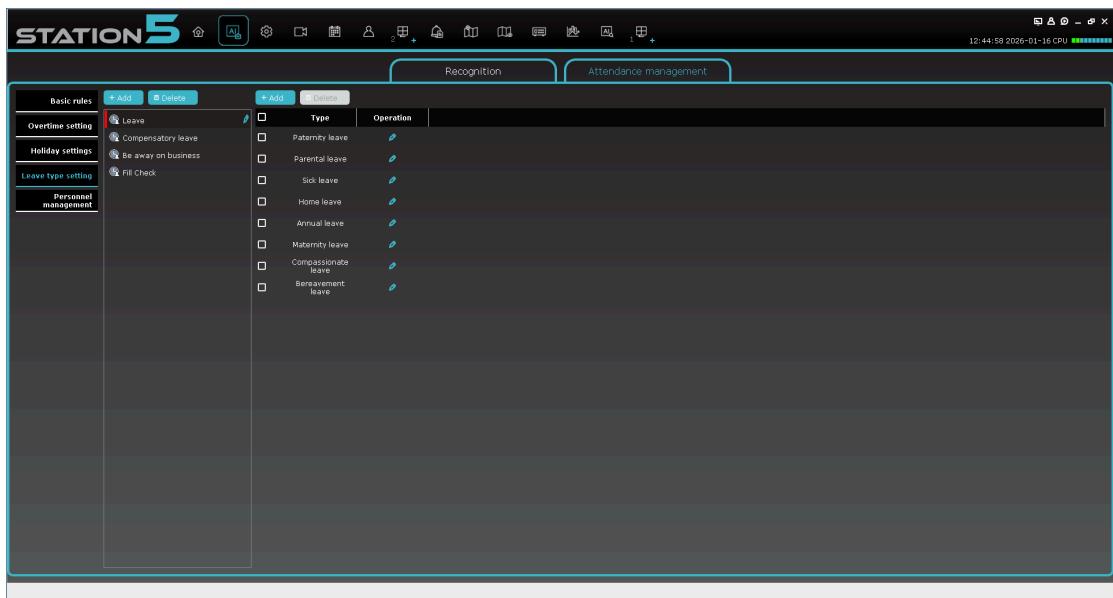


Classify holiday types. The categories are listed on the left, and the sub-categories are listed next to the categories. Read the types from and save the types to the local database.

Click **+ Add** or **Delete** to add or delete a leave type.

5. Personnel management

Select a device in and click the button. Then the local database is queried, and the device face information is synchronized to Station 5. The information includes the name, face group ID, gender, age, ID code, contact, and more.


Click to export the selected face information to local storage. In the **Operation** column, click to modify the face information, as shown in the following figure:

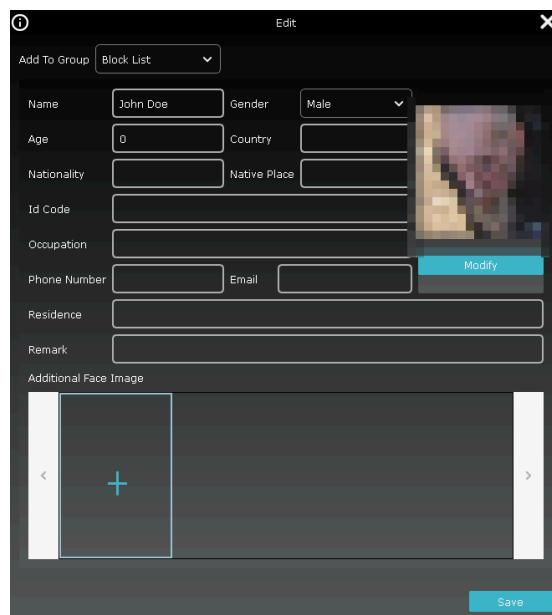

All the information listed can be modified. And you can upload multiple face images.

Click  to delete the face information.

Click  to add later sign-in for people who did not sign in due to business, leave, and time off in lieu. The later sign-in types are the same as the leave types, as shown in the following figure:

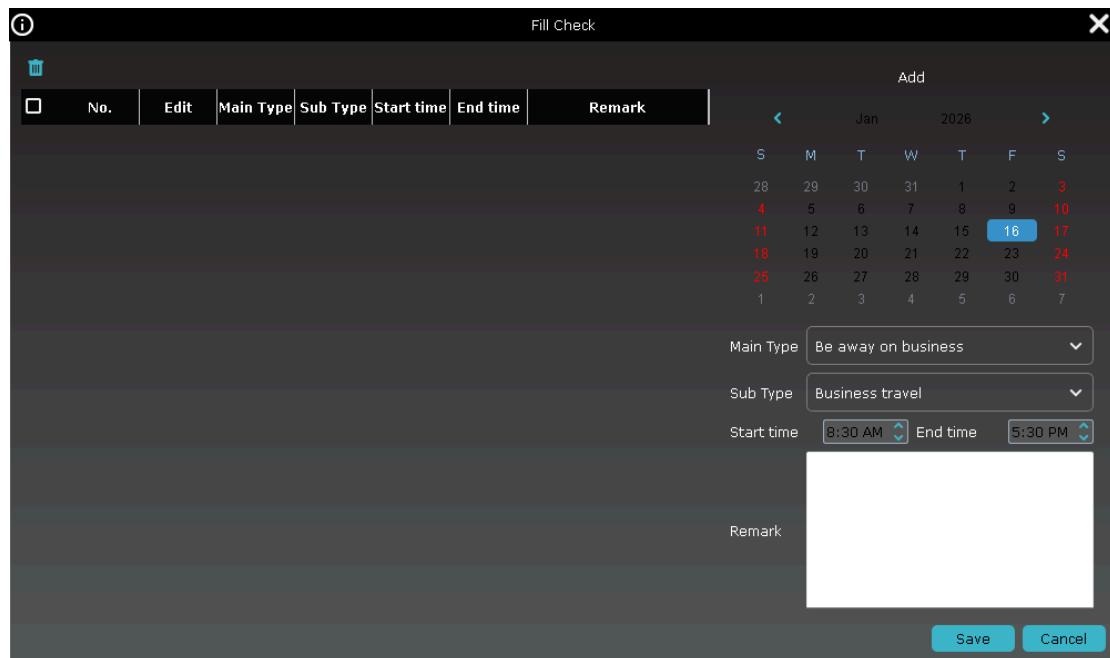



SECURING YOUR WORLD



gsdgroupinc.com



1 (866) 791-7020



sales@gsdgroupinc.com



180 Boul Bellerose Ouest,
Suite 100, Laval QC H7L 6A2



facebook.com/GSDGROUPINC



linkedin.com/company/g-s-d-group/



<https://www.youtube.com/@gsdgroupinc>