

EYEBALL HD ANALOG CAMERA

Introducing the TEBFTV28AIO-5MP, an analog camera delivering exceptional surveillance capabilities. With a high-resolution 5MP sensor and a wide 2.8mm lens, this camera captures crisp and detailed footage. Equipped with infrared technology, it ensures clear vision up to 30 meters even in low-light conditions. Its IP67 waterproof rating makes it suitable for outdoor installations, while the built-in microphone adds audio monitoring capability. Plus, with TotalView technology, enjoy vivid color images even in the darkness of night. Invest in reliable security with this analog camera for comprehensive surveillance needs.

This camera model is also available in black - TEBFTV28AIO-5MP-B



TEBFTV28AIO-5MP



5MP RESOLUTION



2.8MM WIDE LENS



IR UP TO 30M



MICROPHONE



TVI-CVI-AHD-960H



SEE IN COLOR
AT NIGHT



WATERPROOF AND
DUST-TIGHT



POWER DC/12V

VIDEO

IMAGING DEVICE	1/2.7" Progressive CMOS
TOTAL PIXELS	2608 (H) × 1960 (V)
EFFECTIVE PIXELS	2608 (H) × 1960 (V)
SCANNING SYSTEM	progressive scanning
MIN. ILLUMINATION	2608 (H) × 1960 (V)
VIDEO OUTPUT	BNC
RESOLUTION	5MP 2592 (H) × 1944 (V)
MAX. FRAMERATE	5AHD/5TVI: 5MP@20fps 4AHD/4CVI/4TVI:P@25fps N@30fps 2AHD/2CVI/2TVI:P@25fps N@30fps CVBS: 960H
FOCAL LENGTH (ZOOM RATIO)	2.8MM
MAX. APERTURE RATIO	F1.0
ANGULAR FIELD OF VIEW	H:96.51° / V:69.85° / D:127.34°
MIN. OBJECT DISTANCE	2m
LENS TYPE	Fixed lens

LAWS AND REGULATIONS

SAFETY	CE LVD
EMC	CE EMC, FCC
ROHS	RoHS2.0



OPERATIONAL

AUDIO	Audio over coaxial
AUDIO RANGE	7M
WARM LIGHT VIEWABLE LENGTH	20M
IR DISTANCE	30m
ON SCREEN DISPLAY	English
DAY & NIGHT	Color / Ext / B/W
BACKLIGHT COMPENSATION	Off / User BLC
WIDE DYNAMIC RANGE	N/A
DIGITAL NOISE REDUCTION	2D DNR
GAIN CONTROL	Auto
WHITE BALANCE	ATW
ELECTRONIC SHUTTER SPEED	Auto
REVERSE	Mirror
REMOTE CONTROL INTERFACE	ACP (AHD Coax Protocol)
VIDEO TRANSMISSION DISTANCE	MAX 300M (RG-6)

GENERAL

OPERATING TEMPERATURE / HUMIDITY	-30°C ~ 55°C / 90%
INGRESS PROTECTION	IP66
INPUT VOLTAGE / CURRENT	12V DC
POWER CONSUMPTION	IR OFF ≤1W, IR ON ≤4W
COLOR / MATERIAL	Metal
DIMENSIONS	Ø100x90mm
WEIGHT	appr 410g

DIMENSIONS

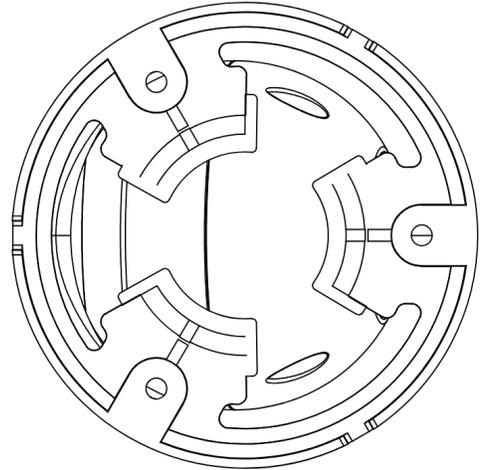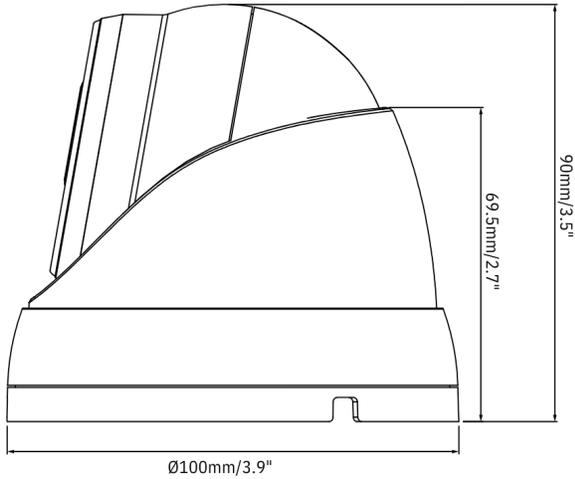

ACCESSORIES



EB3BASE4
JUNCTION BOX



TEBBASE1
JUNCTION BOX



WMB2
WALLMOUNT BRACKET



PMB6
POLE MOUNT BRACKET



EB3BASE4-G
PENDANT



TEBBASE1-G
PENDANT



WMB6
WALLMOUNT BRACKET



COMB6
CORNER MOUNT BRACKET

2024 Global Surveillance Distribution, G.S.D Group and G.S.D are registered trademarks of Global Surveillance Distribution Group, Inc. in Canada and / or other countries. We reserve the right to change the design and specifications of the product Without notice and without incurring any obligation.